

DATE	DESCRIPTION	DATE	DATE	DATE
27MAR2015	GF	27MAR2015	GF	SM

DATE	DESCRIPTION	DATE	DATE	DATE
27MAR2015	GF	27MAR2015	GF	SM

NOTES :

△ MATERIALS AND FINISH:

— HOUSING: PA66
— CONTACTS: COPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE

2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)

3. WIRE TYPES AND SIZES ACCEPTED
WIRE RANGE: 14AWG~20AWG(SOLID&STRANDED)
STRIP LENGTH: 7.5mm~8.5mm

4. PACKAGED IN TRAY.

5. CURRENT RATING: 6Amp AC300V.

6. OPERATION TEMPERATURE: -40°C TO +105°C

P/N: *-2834011-*




COLOR CODE: _____

PIN No: _____



SERIES CODE

- 1=GREEN
 - 2=BLUE
 - 3=BROWN
 - 4=ORANGE
 - 5=GREY
 - 6=RED
 - 7=YELLOW
 - 8=PURPLE
 - 9=WHITE
 - 0=BLACK
- 2=2 POSN
 - 3=3 POSN
 - 4=4 POSN
 - 5=5 POSN
 - 6=6 POSN
 - 7=7 POSN
 - 8=8 POSN

REMARK: THE DIFFERENT COLORS COULD BE COMBINED TO THE NEW CONNECTOR P/NS FOR CUSTOMER REQUEST.

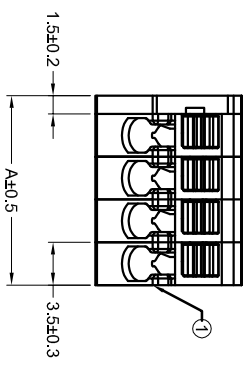

DETAIL INNER

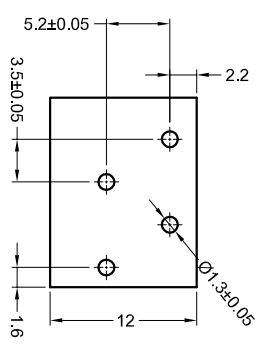

RECOMMEND PCB Layout

REV	DESCRIPTION	DATE	DATE	DATE
A	FIRST VERSION	08-13/048	GF	SM
B	ADD PART NO.	11-13/048	GF	SM

REV	DESCRIPTION	DATE	DATE	DATE
A	FIRST VERSION	08-13/048	GF	SM
B	ADD PART NO.	11-13/048	GF	SM

THIS DRAWING IS A CONTROLLED DOCUMENT	DATE: 27MAR2015	DATE: 27MAR2015	DATE: 27MAR2015	DATE: 27MAR2015
REVISIONS	DESCRIPTION	DATE	DATE	DATE
A	FIRST VERSION	08-13/048	GF	SM
B	ADD PART NO.	11-13/048	GF	SM
CUSTOMER DRAWING				