







4

3

2

1


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	08JUL2015	DL	CW

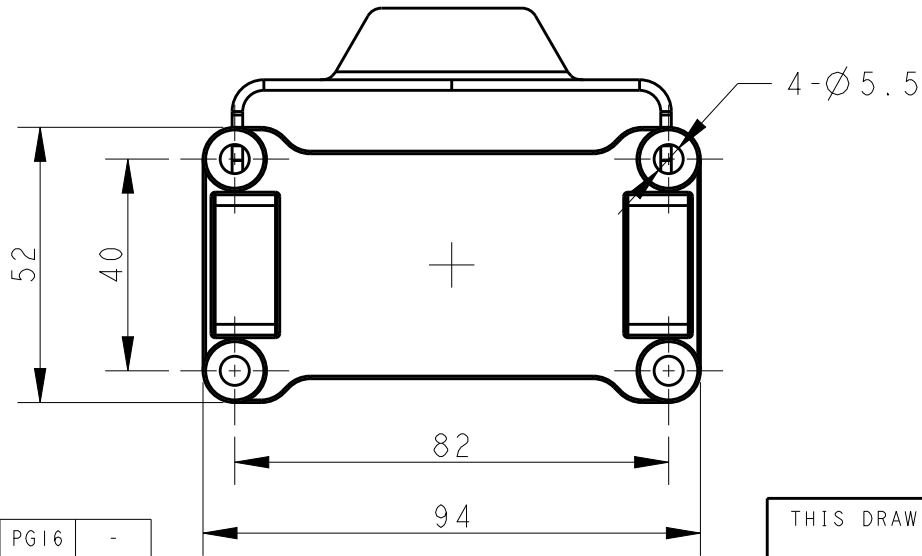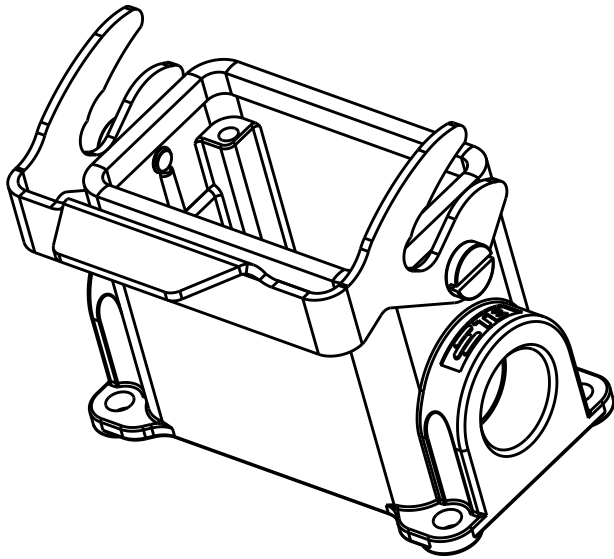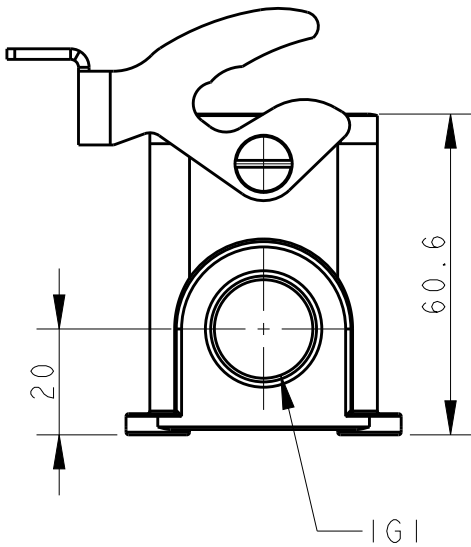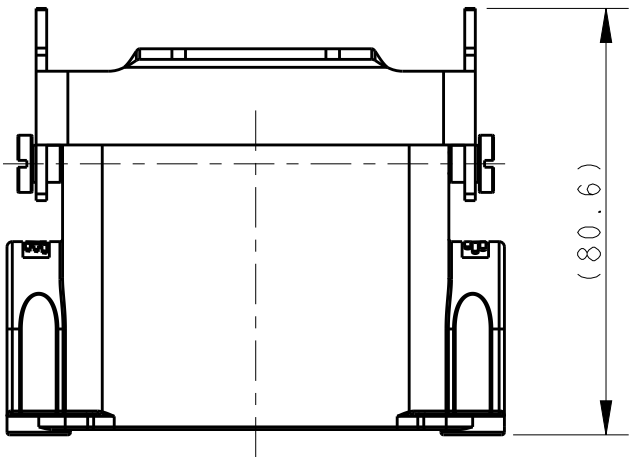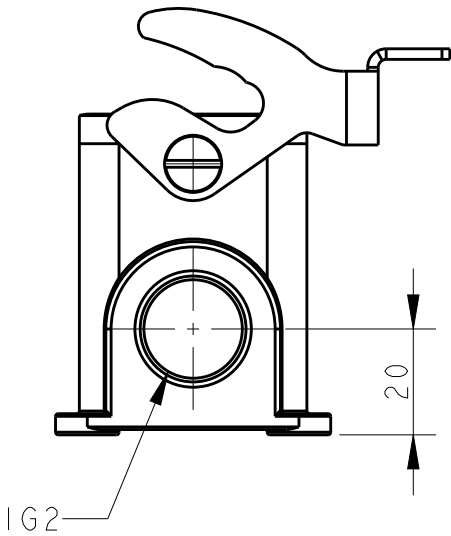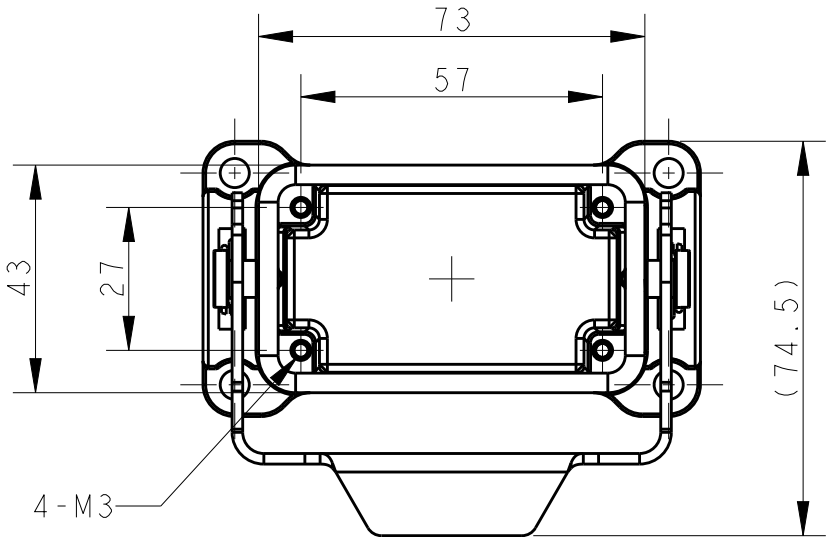

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释：
1. 技术参数：
主体材料： 铝合金
表面处理： 粉末喷涂， 灰色
工作温度： -40-+125°C
防护等级： IP65（配合）

TI610103116-000	H10B-SGR-LB-PG16	PG16	-
TI610103120-000	H10B-SGR-LB-M20	M20	-
TI610103121-000	H10B-SGR-LB-PG21	PG21	-
TI610103125-000	H10B-SGR-LB-M25	M25	-
TI610103216-000	H10B-SGR-LB-2PG16	PG16	PG16
TI610103220-000	H10B-SGR-LB-2M20	M20	M20
TI610103221-000	H10B-SGR-LB-2PG21	PG21	PG21
TI610103225-000	H10B-SGR-LB-2M25	M25	M25
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 08JUL2015	 TE Connectivity																	
DIMENSIONS: mm		CHK CHRIS WANG 08JUL2015	NAME H10B-SGR-LB-PG																	
		APVD XU XIANG 08JUL2015																		
<table><tr><td colspan="2">TOLERANCES UNLESS OTHERWISE SPECIFIED:</td></tr><tr><td>0 PLC</td><td>±-</td></tr><tr><td>1 PLC</td><td>±-</td></tr><tr><td>2 PLC</td><td>±-</td></tr><tr><td>3 PLC</td><td>±-</td></tr><tr><td>4 PLC</td><td>±-</td></tr><tr><td>ANGLES</td><td>±-</td></tr></table>		TOLERANCES UNLESS OTHERWISE SPECIFIED:		0 PLC	±-	1 PLC	±-	2 PLC	±-	3 PLC	±-	4 PLC	±-	ANGLES	±-	PRODUCT SPEC 108-137013	SIZE A3			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:																		
		0 PLC	±-																	
1 PLC	±-																			
2 PLC	±-																			
3 PLC	±-																			
4 PLC	±-																			
ANGLES	±-																			
APPLICATION SPEC 114-137013	CAGE CODE -																			
MATERIAL TBD					WEIGHT -	DRAWING NO C-TI610103XXX000														
FINISH -		RESTRICTED TO -																		
-						CUSTOMER DRAWING														
		SCALE 7:10																		
						SHEET 1 OF 1														
		REV A																		