
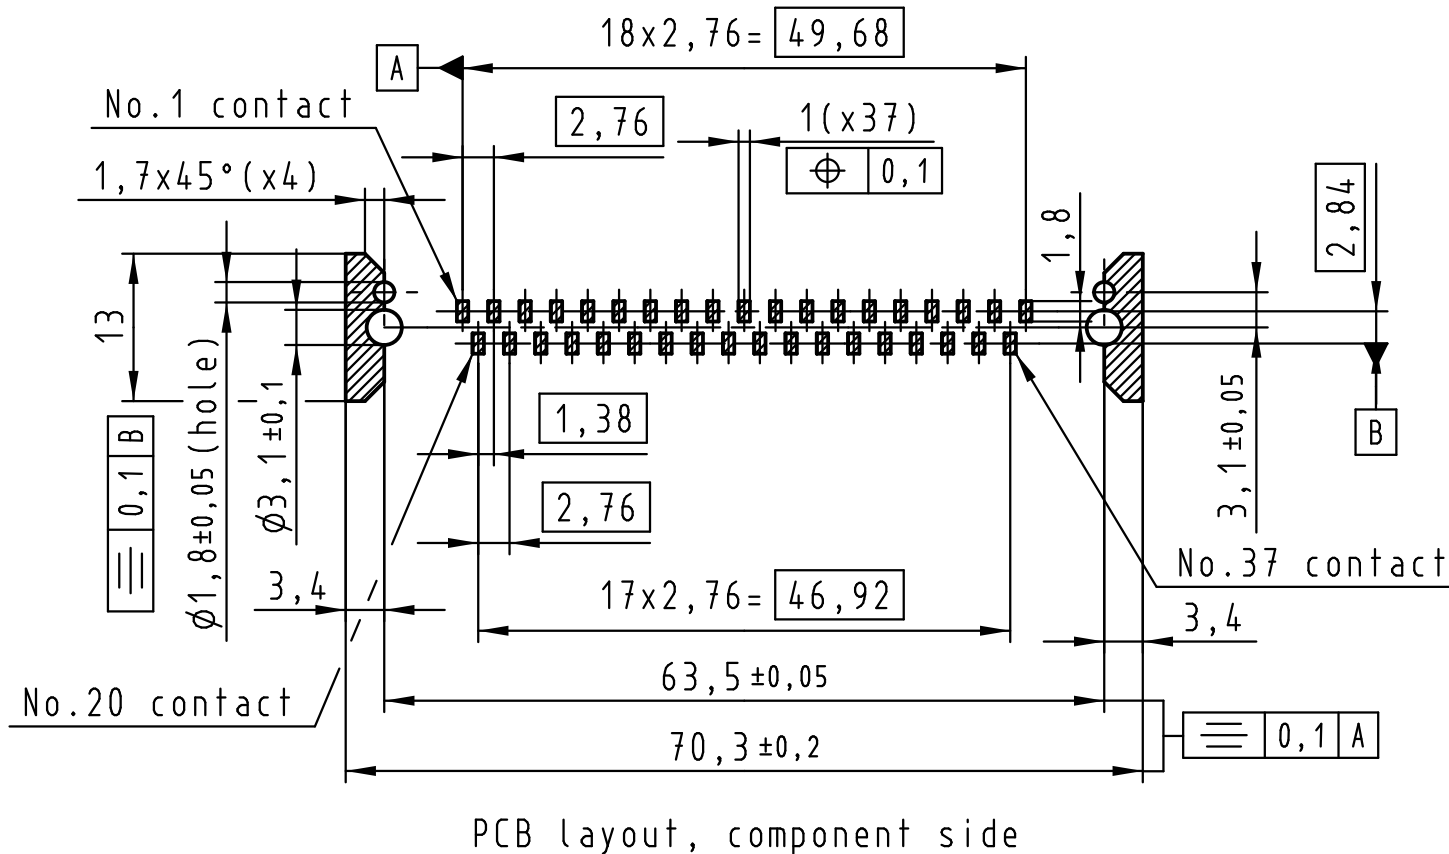
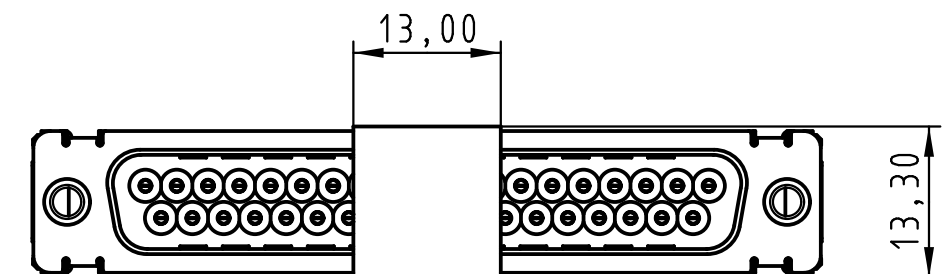


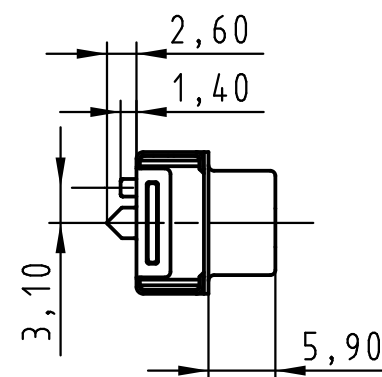

Max. Temperature: 260° during 10 seconds.

0955 469 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors (See details on page2/2)				
0955 469 3812 741	1	4-40 UNC						
0955 469 6811 741	2	M3						
0955 469 6812 741	2	4-40 UNC						
0955 469 7811 741	3	M3						
0955 469 7812 741	3	4-40 UNC						
Part number	PL	Nut	Index designation					
 All Dimensions in mm Original Size DIN A 3			Techn. Character.		Free size tolerances			
				Date	Name	Scale 1.5:1	D-Sub SMT, 37 poles Male, Straight with nuts and ground pins	
			Detail.	25-Oct-11	Johnson.S			
			Insp.	17-Nov-11	Steven.W			
			Stand.	17-Nov-11	Steven.W			
			Zhuhai HARTING Limited			TB 09 55 469 x81x		Page 1/2
EC04070	17-Nov-11	Johnson.S				Sub.		
Mod.	Date	Name						

Technical drawing of a D-Sub SMT connector reel packaging.

The drawing includes three main views:

- Detail A:** A cross-sectional view of the connector housing, showing a height of 19,0 mm.
- Top View:** A circular view of the reel with a diameter of $\phi 380$. It shows four segments and a central hub. An arrow indicates the "Direction of unreeling".
- Side View:** A side profile of the reel showing a width of 88,4 mm and a hole diameter of $\phi 178$.

The top view also shows the arrangement of connectors on the reel:

- Last 11 pcs Without connector
- 140 pcs With connector
- First 10 pcs Without connector




Dimensions shown include 88,0 mm, 84,4 mm, and 4 mm.

See TB 09 55 469 x81x folio 1/2 for connector dimensions and PCB layout.

Packaging in accordance with EIA 481-2.

Part number	PL	Nut	Index designation
0955 469 3811 741	1	M3	Black insulator Reel Packaging: 140 connectors
0955 469 3812 741	1	4-40 UNC	
0955 469 6811 741	2	M3	
0955 469 6812 741	2	4-40 UNC	
0955 469 7811 741	3	M3	
0955 469 7812 741	3	4-40 UNC	

All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances	
Mod.	Dat.	Name	Detail.	Dat.	Name	Scale	
EC04070	17-Nov-11	Johnson.S	Insp.	25-Oct-11	Johnson.S	D-Sub SMT, 37 poles Male, Straight with nuts and ground pins	
			Stand.	17-Nov-11	Steven.W		
Zhuhai HARTING Limited					TB	09 55 469 x81x	Page 2/2

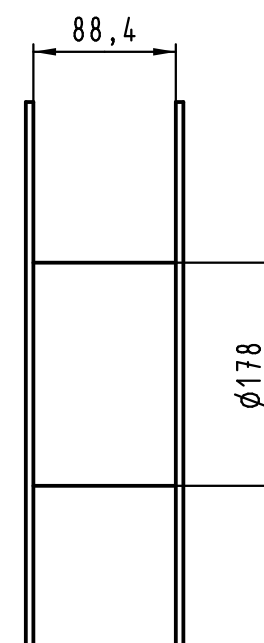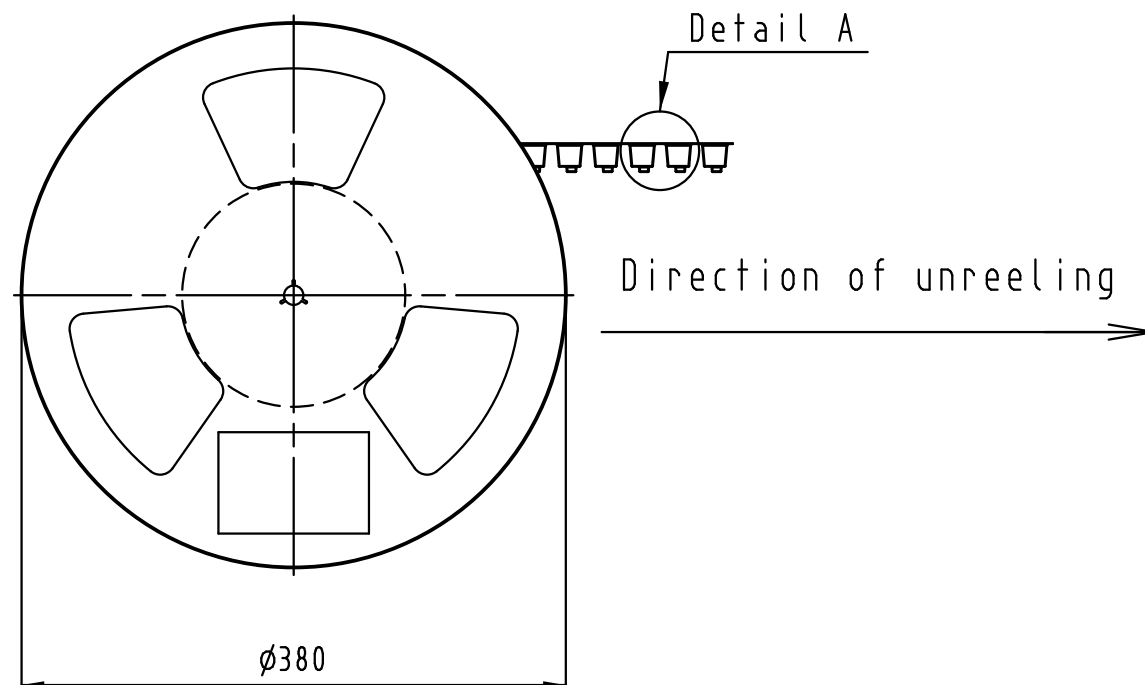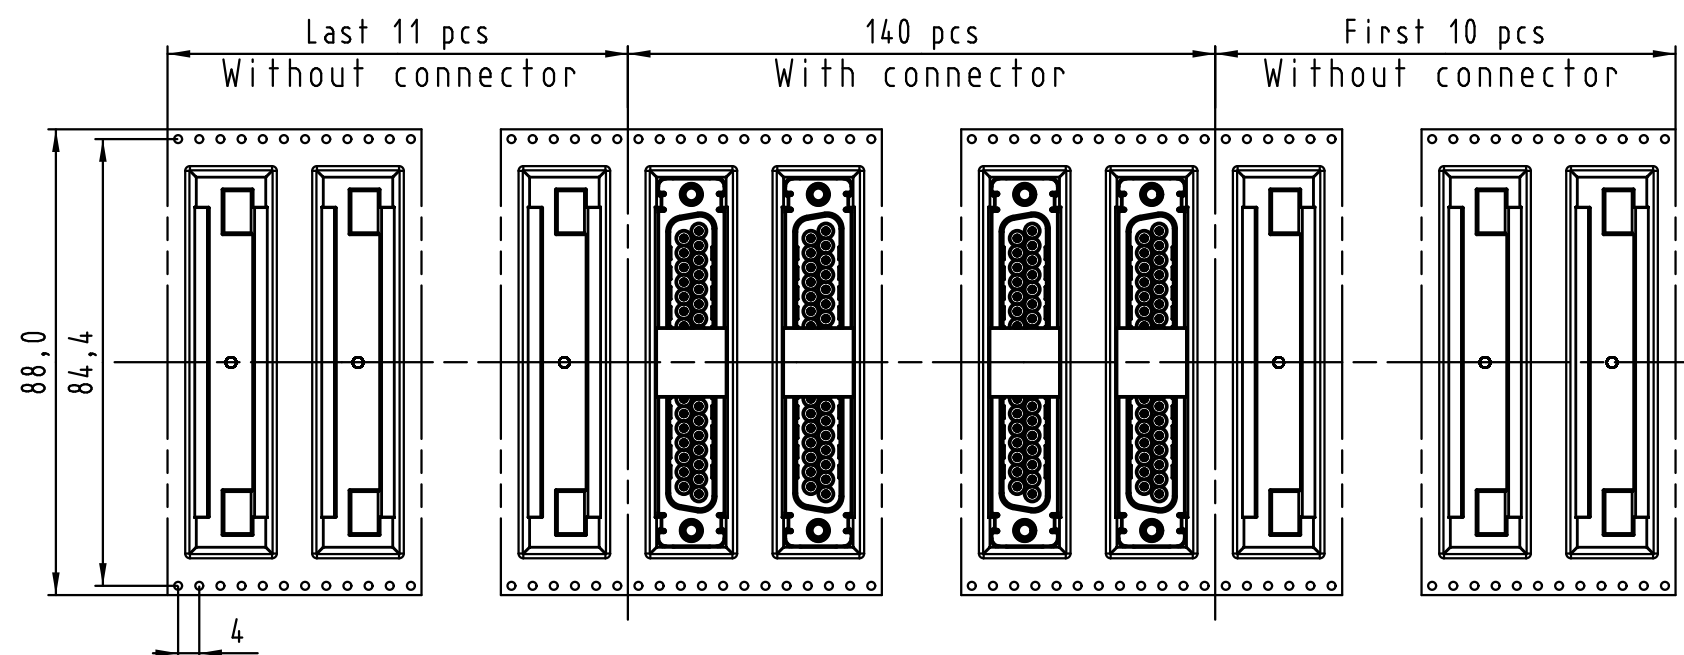

See TB 09 55 469 x81x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

0955 469 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 469 3812 741	1	4-40 UNC		
0955 469 6811 741	2	M3		
0955 469 6812 741	2	4-40 UNC		
0955 469 7811 741	3	M3		
0955 469 7812 741	3	4-40 UNC		
Part number	PL	Nut	Index designation	

 All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances			
				Dat.	Name	Scale	D-Sub SMT, 37 poles Male, Straight with nuts and ground pins		
			Detail.	25-Oct-11	Johnson.S				
			Insp.	17-Nov-11	Steven.W				
			Stand.	17-Nov-11	Steven.W				
EC04070	17-Nov-11	Johnson.S	Zhuhai HARTING Limited				TB	09 55 469 x81x	Page
Mod.	Dat.	Name							Sub.