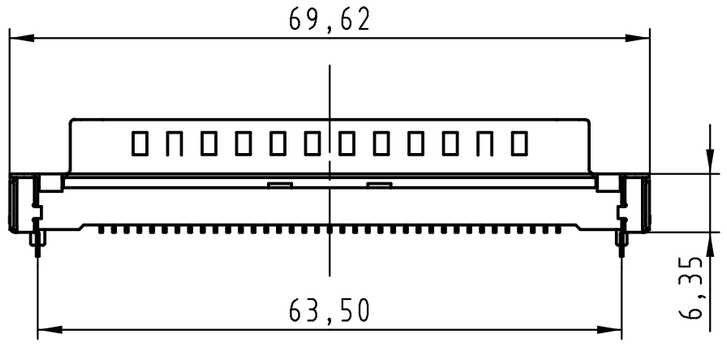

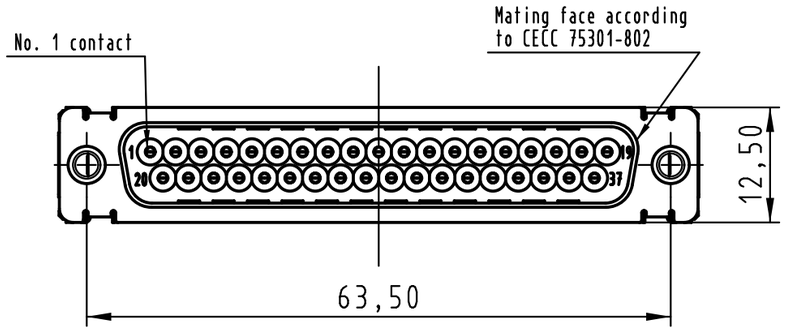



Load vacuum cover

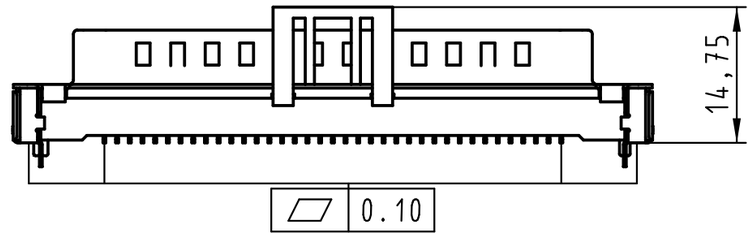

(All contacts and grounds)

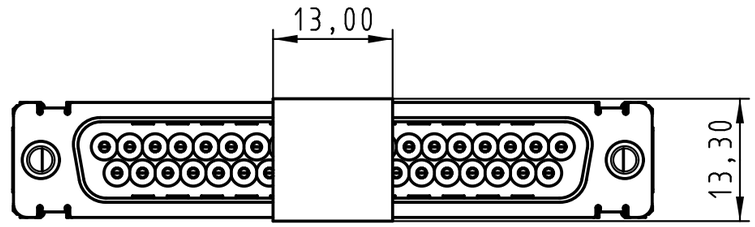

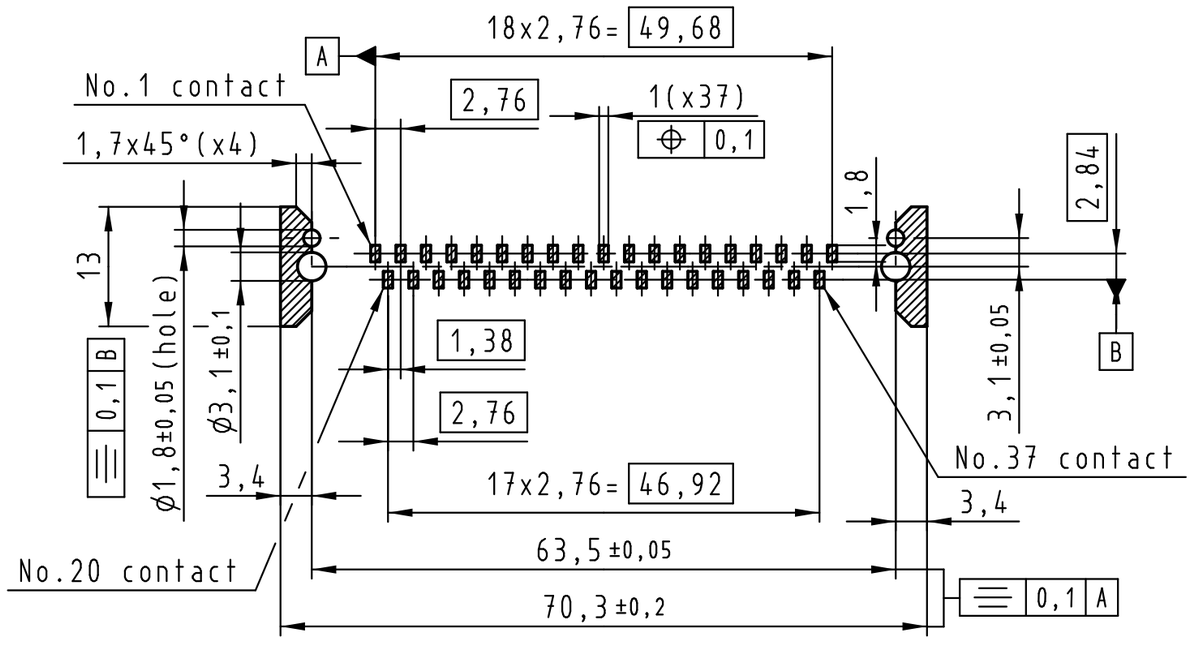

PCB layout, component side

Max. Temperature: 260° during 10 seconds.

Part number	PL	Nut	Index designation
0955 469 3811 741	1	M3	Black insulator; Reel Packaging: 140 connectors (See details on page2/2)
0955 469 3812 741	1	4-40 UNC	
0955 469 6811 741	2	M3	
0955 469 6812 741	2	4-40 UNC	
0955 469 7811 741	3	M3	
0955 469 7812 741	3	4-40 UNC	

All Dimensions in mm
Original Size DIN A 3

Techn. Character.

Free size tolerances

	Dat.	Name
Detail.	25-Oct-11	Johnson.S
Insp.	17-Nov-11	Steven.W
Stand.	17-Nov-11	Steven.W

Scale 1.5:1

D-Sub SMT, 37 poles
Male, Straight
with nuts and ground pins

Mod.	Dat.	Name
EC04070	17-Nov-11	Johnson.S

Zhuhai HARTING Limited

TB 09 55 469 x81x

Sub.

Page 1/2

All rights reserved

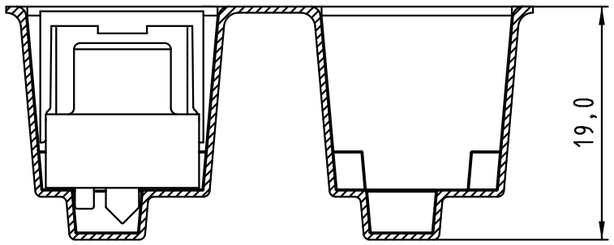

Detail A

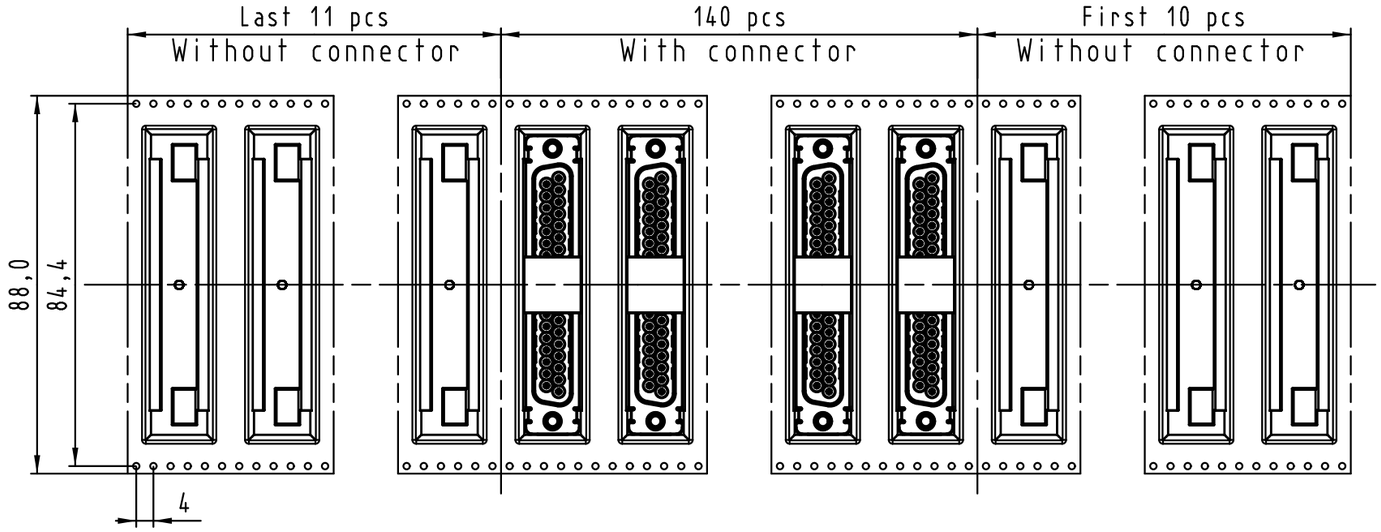

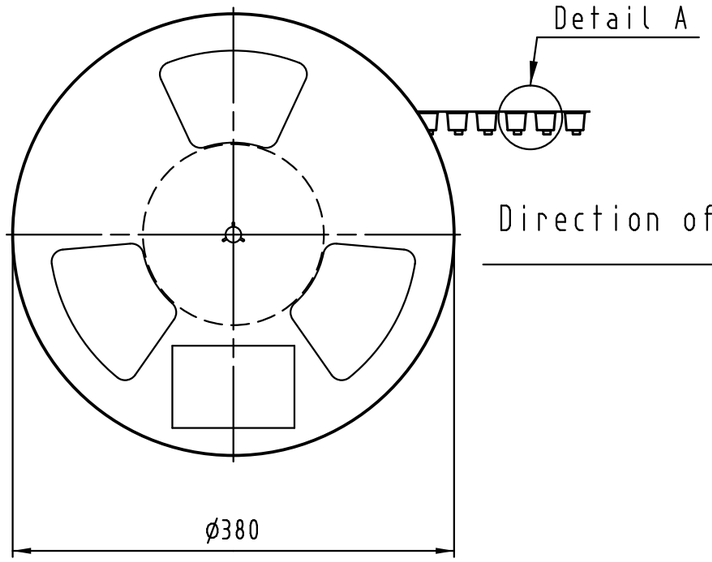

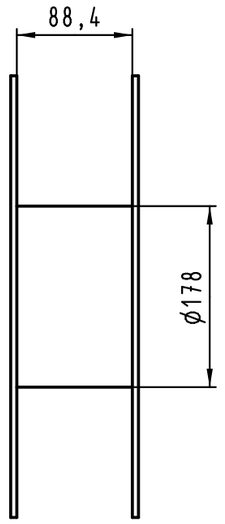

See TB 09 55 469 x81x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

Part number	PL	Nut	Index designation	
0955 469 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 469 3812 741	1	4-40 UNC		
0955 469 6811 741	2	M3		
0955 469 6812 741	2	4-40 UNC		
0955 469 7811 741	3	M3		
0955 469 7812 741	3	4-40 UNC		

All Dimensions in mm
Original Size DIN A 3

Techn. Character.

Free size tolerances

	Dat.	Name	Scale
Detail.	25-Oct-11	Johnson.S	
Insp.	17-Nov-11	Steven.W	
Stand.	17-Nov-11	Steven.W	

Mod.	Dat.	Name
EC04070	17-Nov-11	Johnson.S

Zhuhai HARTING Limited

D-Sub SMT, 37 poles
Male, Straight
with nuts and ground pins

TB 09 55 469 x81x

Sub.

Page 2/2

All rights reserved