


## T-1 StatusPak™ Circuit Board Indicators

### Description and Features

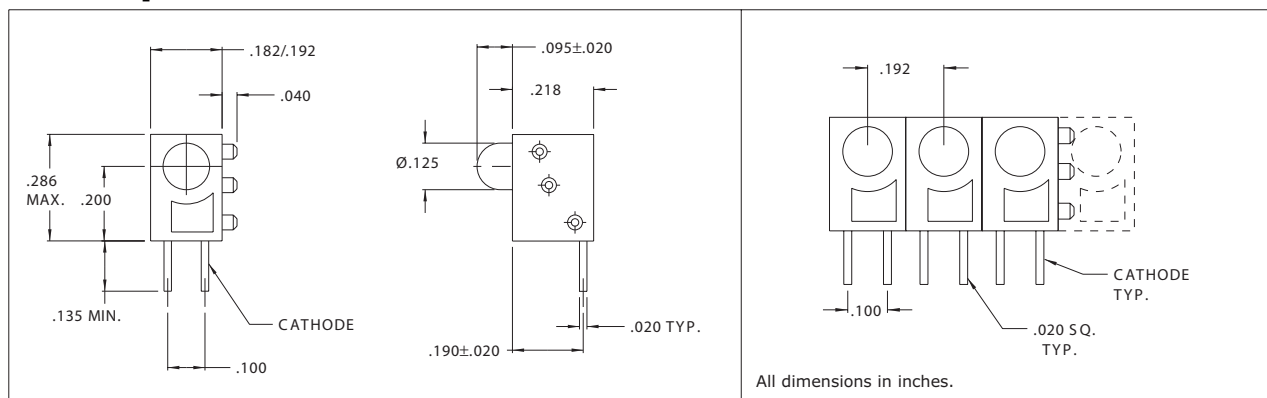

Printed Circuit Board assembly has been made faster and easier than ever before. Now you can mount from one to ten circuit board indicators, as a single unit, in one easy step.

T-1 StatusPak™ is customized to your specification. You choose the number of LEDs, color sequence and position.

StatusPak™ is shipped to you as a complete unit, ready for one-step PC board mounting. Unique snap-together feature allows you to add or take away StatusPak™ modules as needed without any special tooling.

•RoHS Compliant

Refer to Mounting Hole Pattern 1.pdf

## ELECTRO - OPTICAL CHARACTERISTICS AND RATINGS

| Part Number | Emitted Color | Lens Color | Package Type | Luminous Intensity |            | Forward Voltage |          | Viewing Angle (degrees) | Peak Wavelength (nm) |
|-------------|---------------|------------|--------------|--------------------|------------|-----------------|----------|-------------------------|----------------------|
|             |               |            |              | Min. (mcd)         | Typ. (mcd) | Typ. (V)        | Max. (V) |                         |                      |
| CMC01R      | H.E.Red       | Clear      | Non-Diffused | 24.0               | 60.0       | 2.0             | 2.5      | 30                      | 625                  |
| CMC01Y      | Yellow        | Clear      | Non-Diffused | 24.0               | 60.0       | 2.1             | 2.5      | 30                      | 590                  |
| CMC01G      | H.E.Green     | Clear      | Non-Diffused | 24.0               | 60.0       | 2.2             | 2.5      | 30                      | 565                  |
| CMW01R      | H.E.Red       | Red        | Diffused     | 3.2                | 20.0       | 2.0             | 2.5      | 130                     | 625                  |
| CMW01Y      | Yellow        | Yellow     | Diffused     | 3.2                | 12.5       | 2.1             | 2.5      | 120                     | 590                  |
| CMW01G      | H.E.Green     | Green      | Diffused     | 3.2                | 12.5       | 2.2             | 2.5      | 120                     | 565                  |

## T-1 StatusPak™ Circuit Board Indicators

### Description and Features

#### How to order a Multi Position Assembly

1. Determine the lens type you require:  
 -diffused or non-diffused
2. Determine the number of positions you require  
 including any open spaces. (CML does not recommend assemblies of greater than ten positions.)
3. Determine the specific LED required in each position from the table below.

| CMC (Non-Diffused)     | CMW (Diffused)      |
|------------------------|---------------------|
| R = Ultra Brite Red    | R = Hi-Brite Red    |
| Y = Ultra Brite Yellow | Y = Hi-Brite Yellow |
| G = Ultra Brite Green  | G = Hi-Brite Green  |
| X = Open Space         | X = Open Space      |

#### Example:

**C M W - 0 5 - R Y G G R**

|                      |                      |  
 Lens Type    # of Positions    LED Sequence