
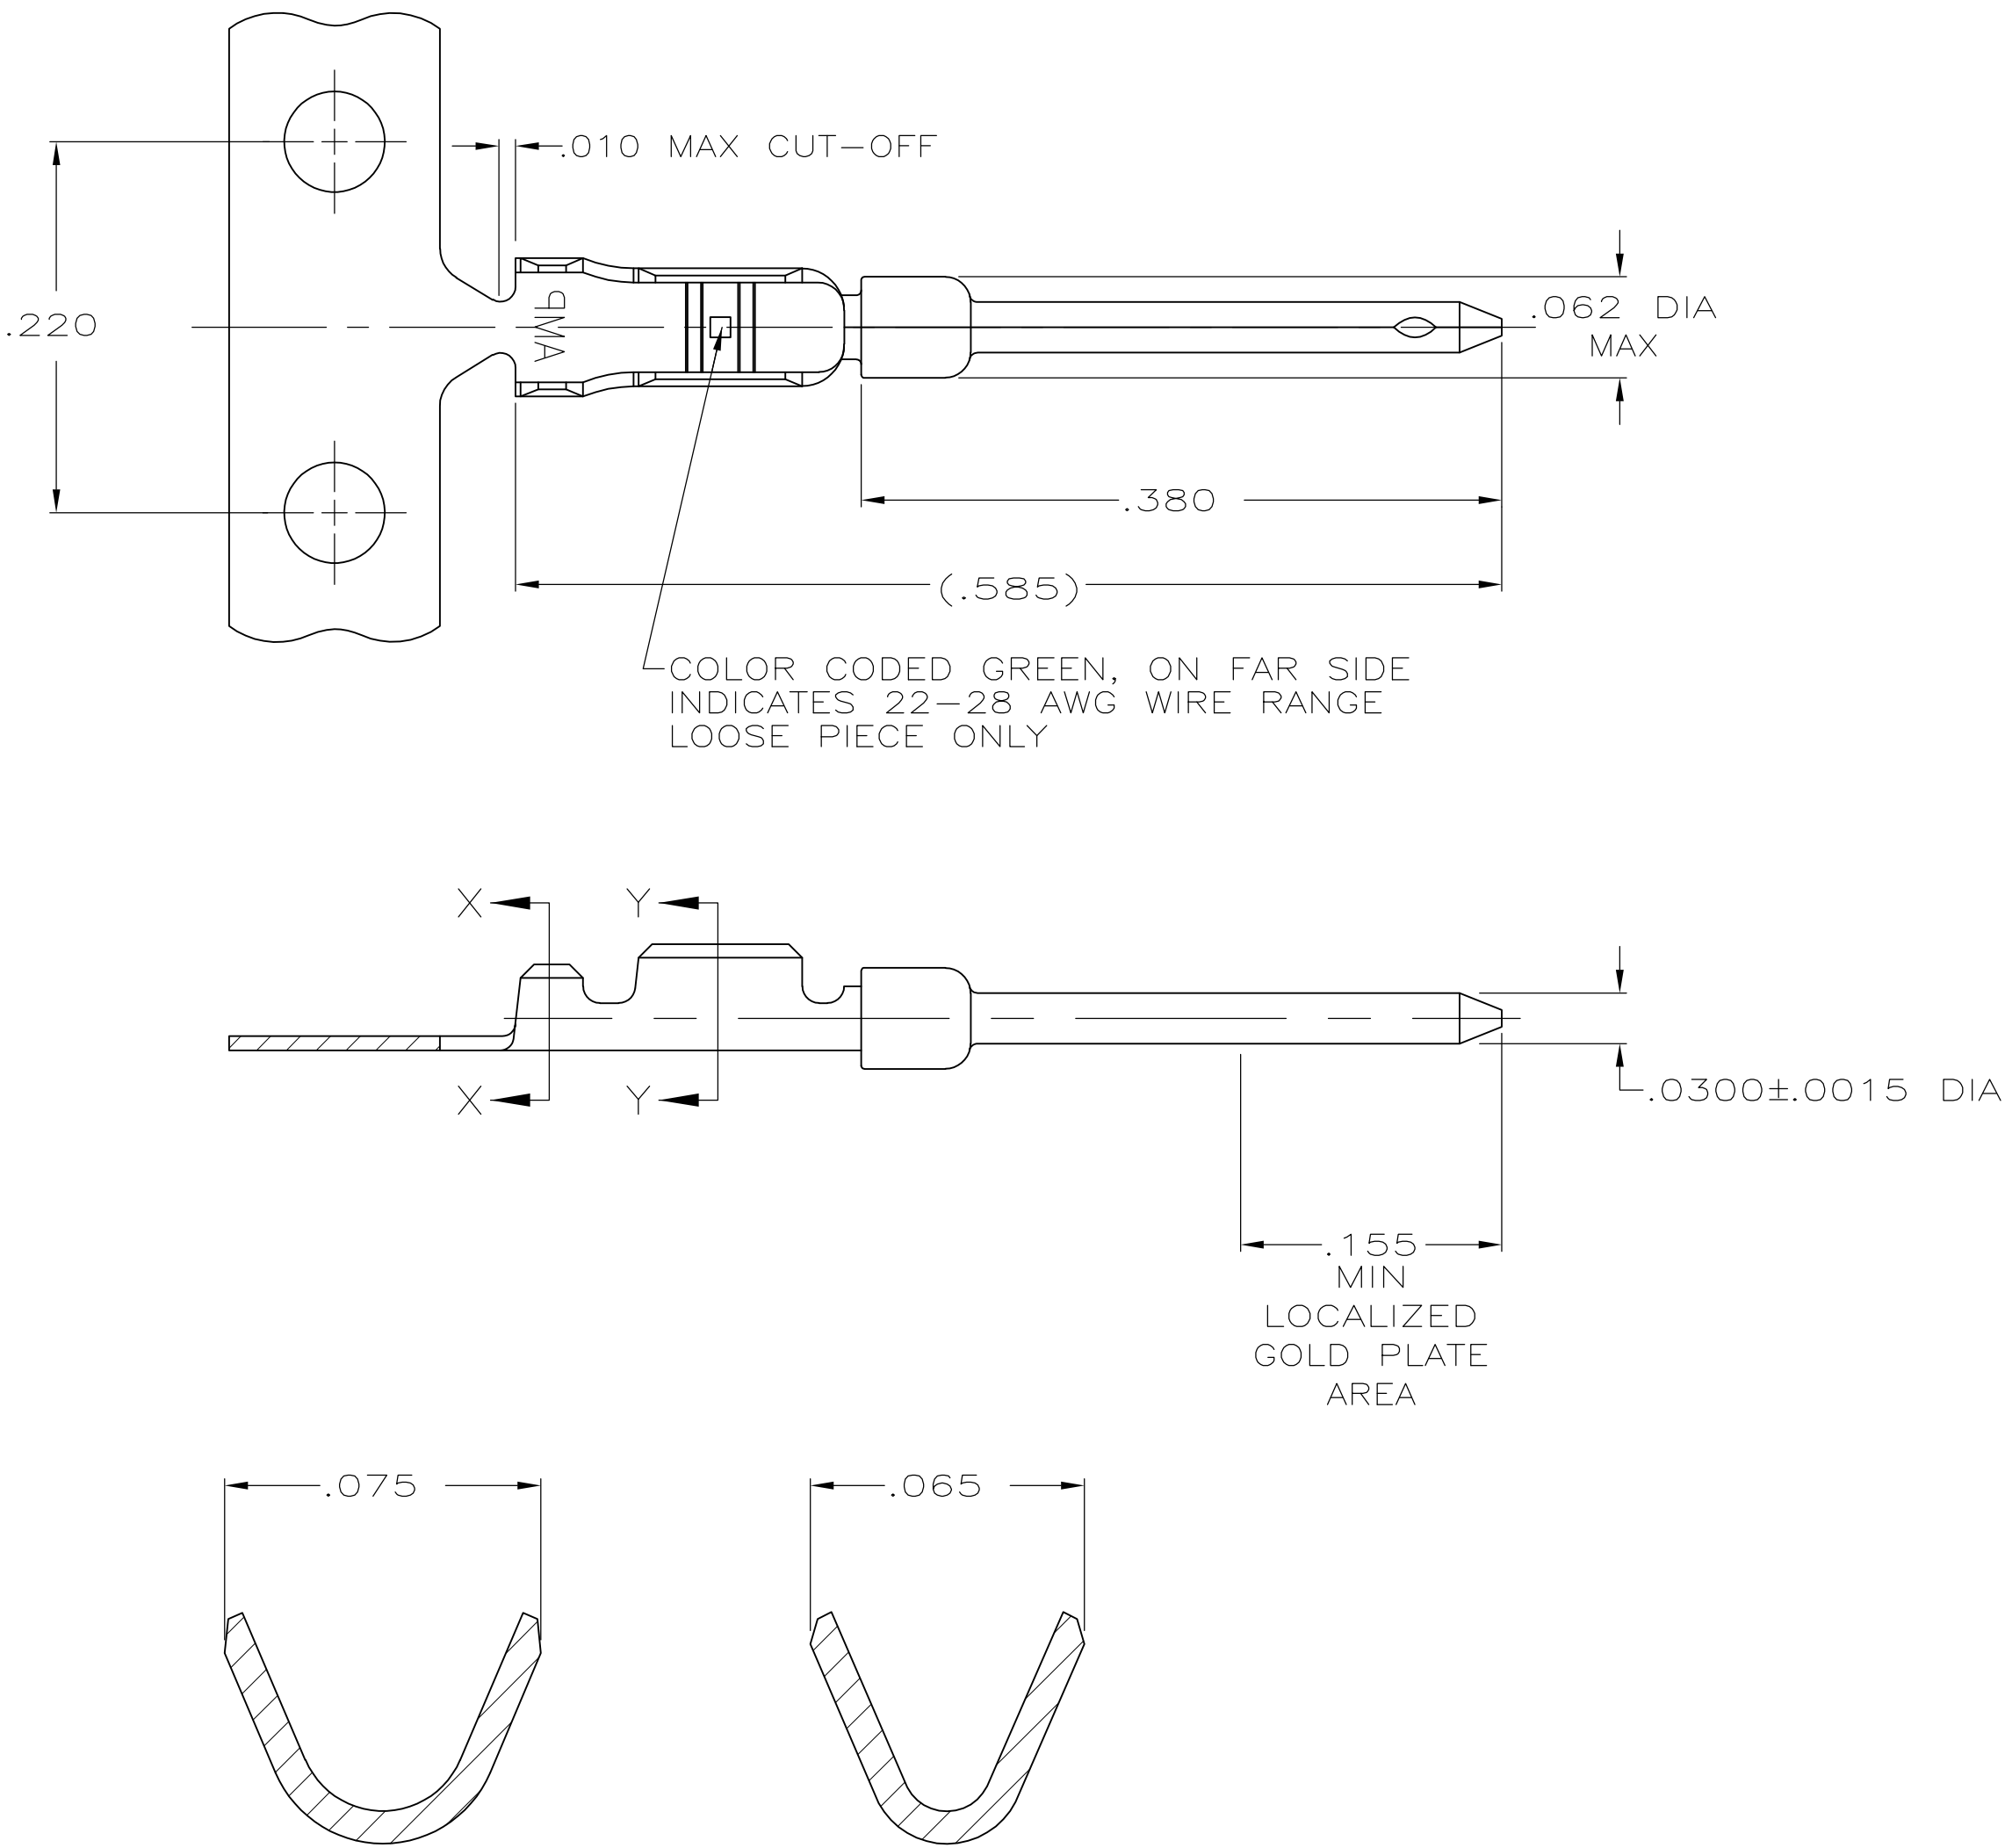


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		C1	REVISED PER ECO-11-004835	11MAR11	RK	HMR



- 1 FOR MINI APPLICATOR.
- 2 FOR HAND TOOL USE ONLY.
3. WIRE RANGE OF 22-28, INSULATION RANGE OF .030-.040.
- 4 .000050 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT. .000100 MIN TIN ON WIRE AND INSULATION BARRELS, .000030 MIN GOLD ON LOCALIZED GOLD PLATE AREA.
OR
.000050 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT. .000100 MIN TIN ON WIRE AND INSULATION BARRELS, GOLD FLASH OVER PALLADIUM-NICKEL, .000030 MIN TOTAL IN LOCALIZED GOLD PLATE AREA.
- 5 GOLD FLASH IN LOCALIZED GOLD PLATE AREA, .000100 MIN TIN IN WIRE & INSULATION BARRELS, BOTH OVER .000050 MIN NICKEL UNDERPLATE.
- 6 SMALL PACK PACKAGING.

		LOOSE PIECE	 1658670-5
		LOOSE PIECE	1658670-4
		STRIP	1658670-3
		LOOSE PIECE	1658670-2
		STRIP	1658670-1
FINISH	USE	TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11-17-04 L. VARELA - DOCK5		 TE Connectivity			
		CHK 11-17-04 J. GERACE					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 11-17-04 M. WALMSLEY		NAME	
		0 PLC ± -		PRODUCT SPEC		PIN CONTACT, 22-28 AWG, 22 DF, AMPLIMITE -	
		1 PLC ± -		108-1268			
		2 PLC ± -		APPLICATION SPEC			
MATERIAL BRASS		3 PLC ± .005		114-10001		SIZE	
		4 PLC ± -		WEIGHT		CAGE CODE	
		ANGLES ± 2°		-		DRAWING NO	
FINISH		SEE TABLE		CUSTOMER DRAWING		RESTRICTED TO	
				A2		00779	
				C-1658670		-	
				SCALE		SHEET	
				10:1		1 of 1	
				REV		C1	