


TITLE	Drawing No.	REV	PAGE
32 AWG, 35 OHM, FEP Jacket Micro Coax.	1000650104	B	1 of 1

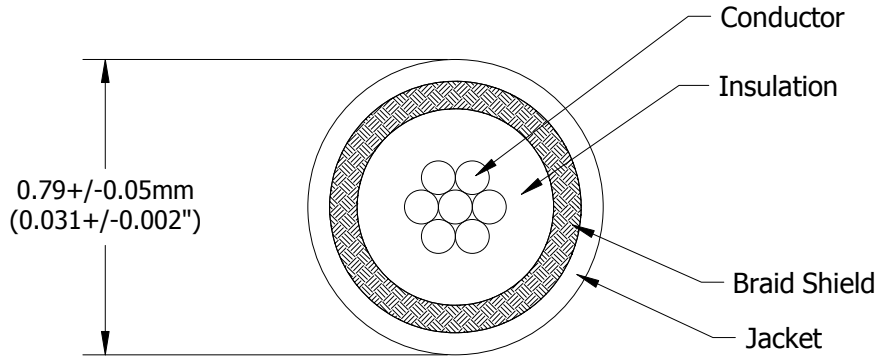

NOTES

Conductor: 32 AWG, 7/40 Tin Plated Copper.
DC Resistance: 580 mOhm/m Ref.

Core: PFA, 0.43 +/- 0.025mm (0.017 +/- 0.001") Diameter.

Color: Green.

Braid Shield: 44 AWG, Tin Plated Copper, > 90% Coverage.
DC Resistance: 250 mOhm/m Ref.

Jacket: FEP, 0.076mm (0.003") Wall Thickness.

Color: Blue.

Impedance: 35 Ohm Ref.

Capacitance: 138 pF/m (42 pF/ft) Ref.

Insulation Resistance: >20 Gohm.

Dielectric Voltage Withstand: 1500 VDC.



This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	A	5384	Preliminary Release.	KP	2/9/18
	B	5410	Updated Notes.	KP	3/21/18