

4

3

2

1



THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		E1	REDRAWN W/CHANGE	ECR-12-021403	13DEC2012	TS KB

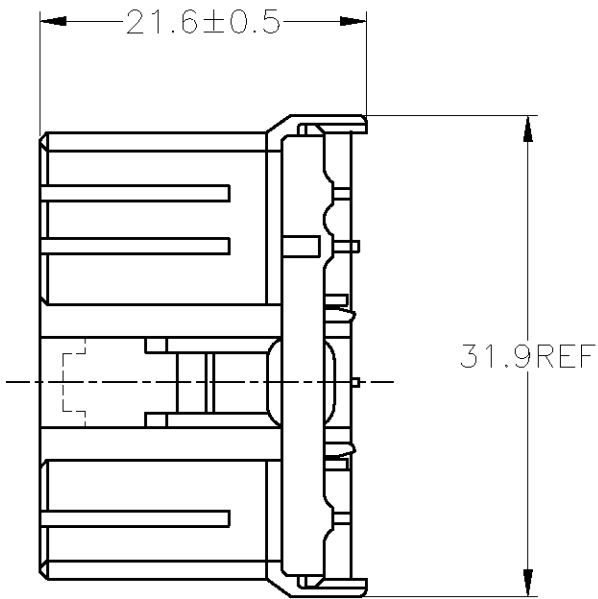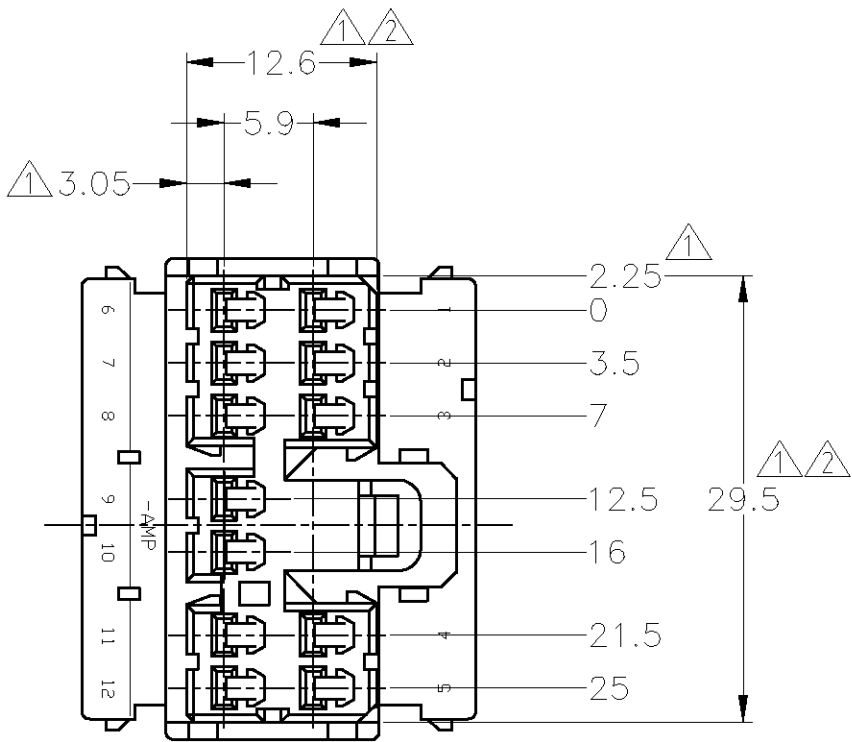

- △ MUST BE KEPT BETWEEN -A- AND 2
△ TO BE MATED WITH THE CAP HOUSING SMOOTHLY
3. APPLIED CONTACT PART NUMBER ; 173630 AND 173631
- △ -A- 面より2mmの範囲で測定
△ 相手ハウジングと所定の機能を満足して嵌合できること
3. 内装するリセプタクルコンタクト型番173630 及び 173631

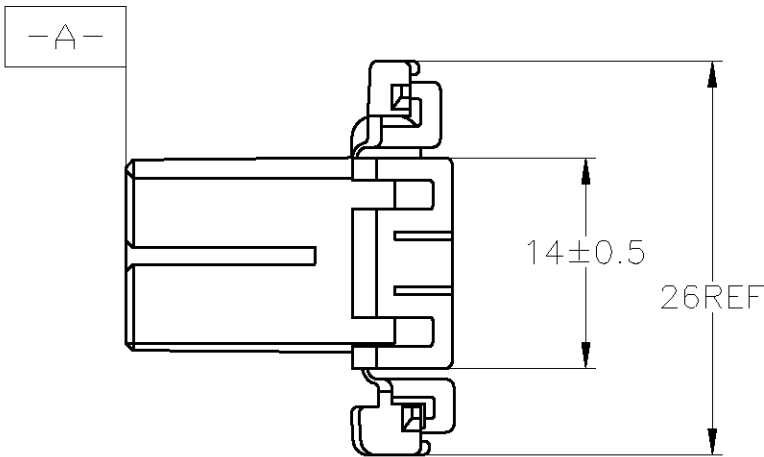

V-2	自然色 (NATURAL)	1-173851-1
HB	オレンジ (ORANGE)	173851-8
	灰 (GRAY)	173851-6
	青 (BLUE)	173851-5
	緑 (GREEN)	173851-4
	黒 (BLACK)	173851-2
使用材料難燃グレード (FLAMMABILITY OF MATERIAL)		色 (COLOR)
		型番 (PART NUMBER)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.SHINOHARA CHK K.BETSUI APVD K.BUTSUI 13DEC2012		 TE Connectivity	
DIMENSIONS: 単位: 耗 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		NAME 名称	
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 製品規格 108-5216,5264	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APPLICATION SPEC 取付適用規格 —		RESTRICTED TO	
10 ± : ±0.2 30 ± > 10 : ±0.25 100 ± > 30 : ±0.3 ANGLE : ±3°		MATERIAL 材料 PBT		FINISH 仕上 —	
		WEIGHT —		SCALE 尺度	
		CUSTOMER DRAWING		SHEET	
		A300779		1 OF 1	
		C=173851		REV E1	