


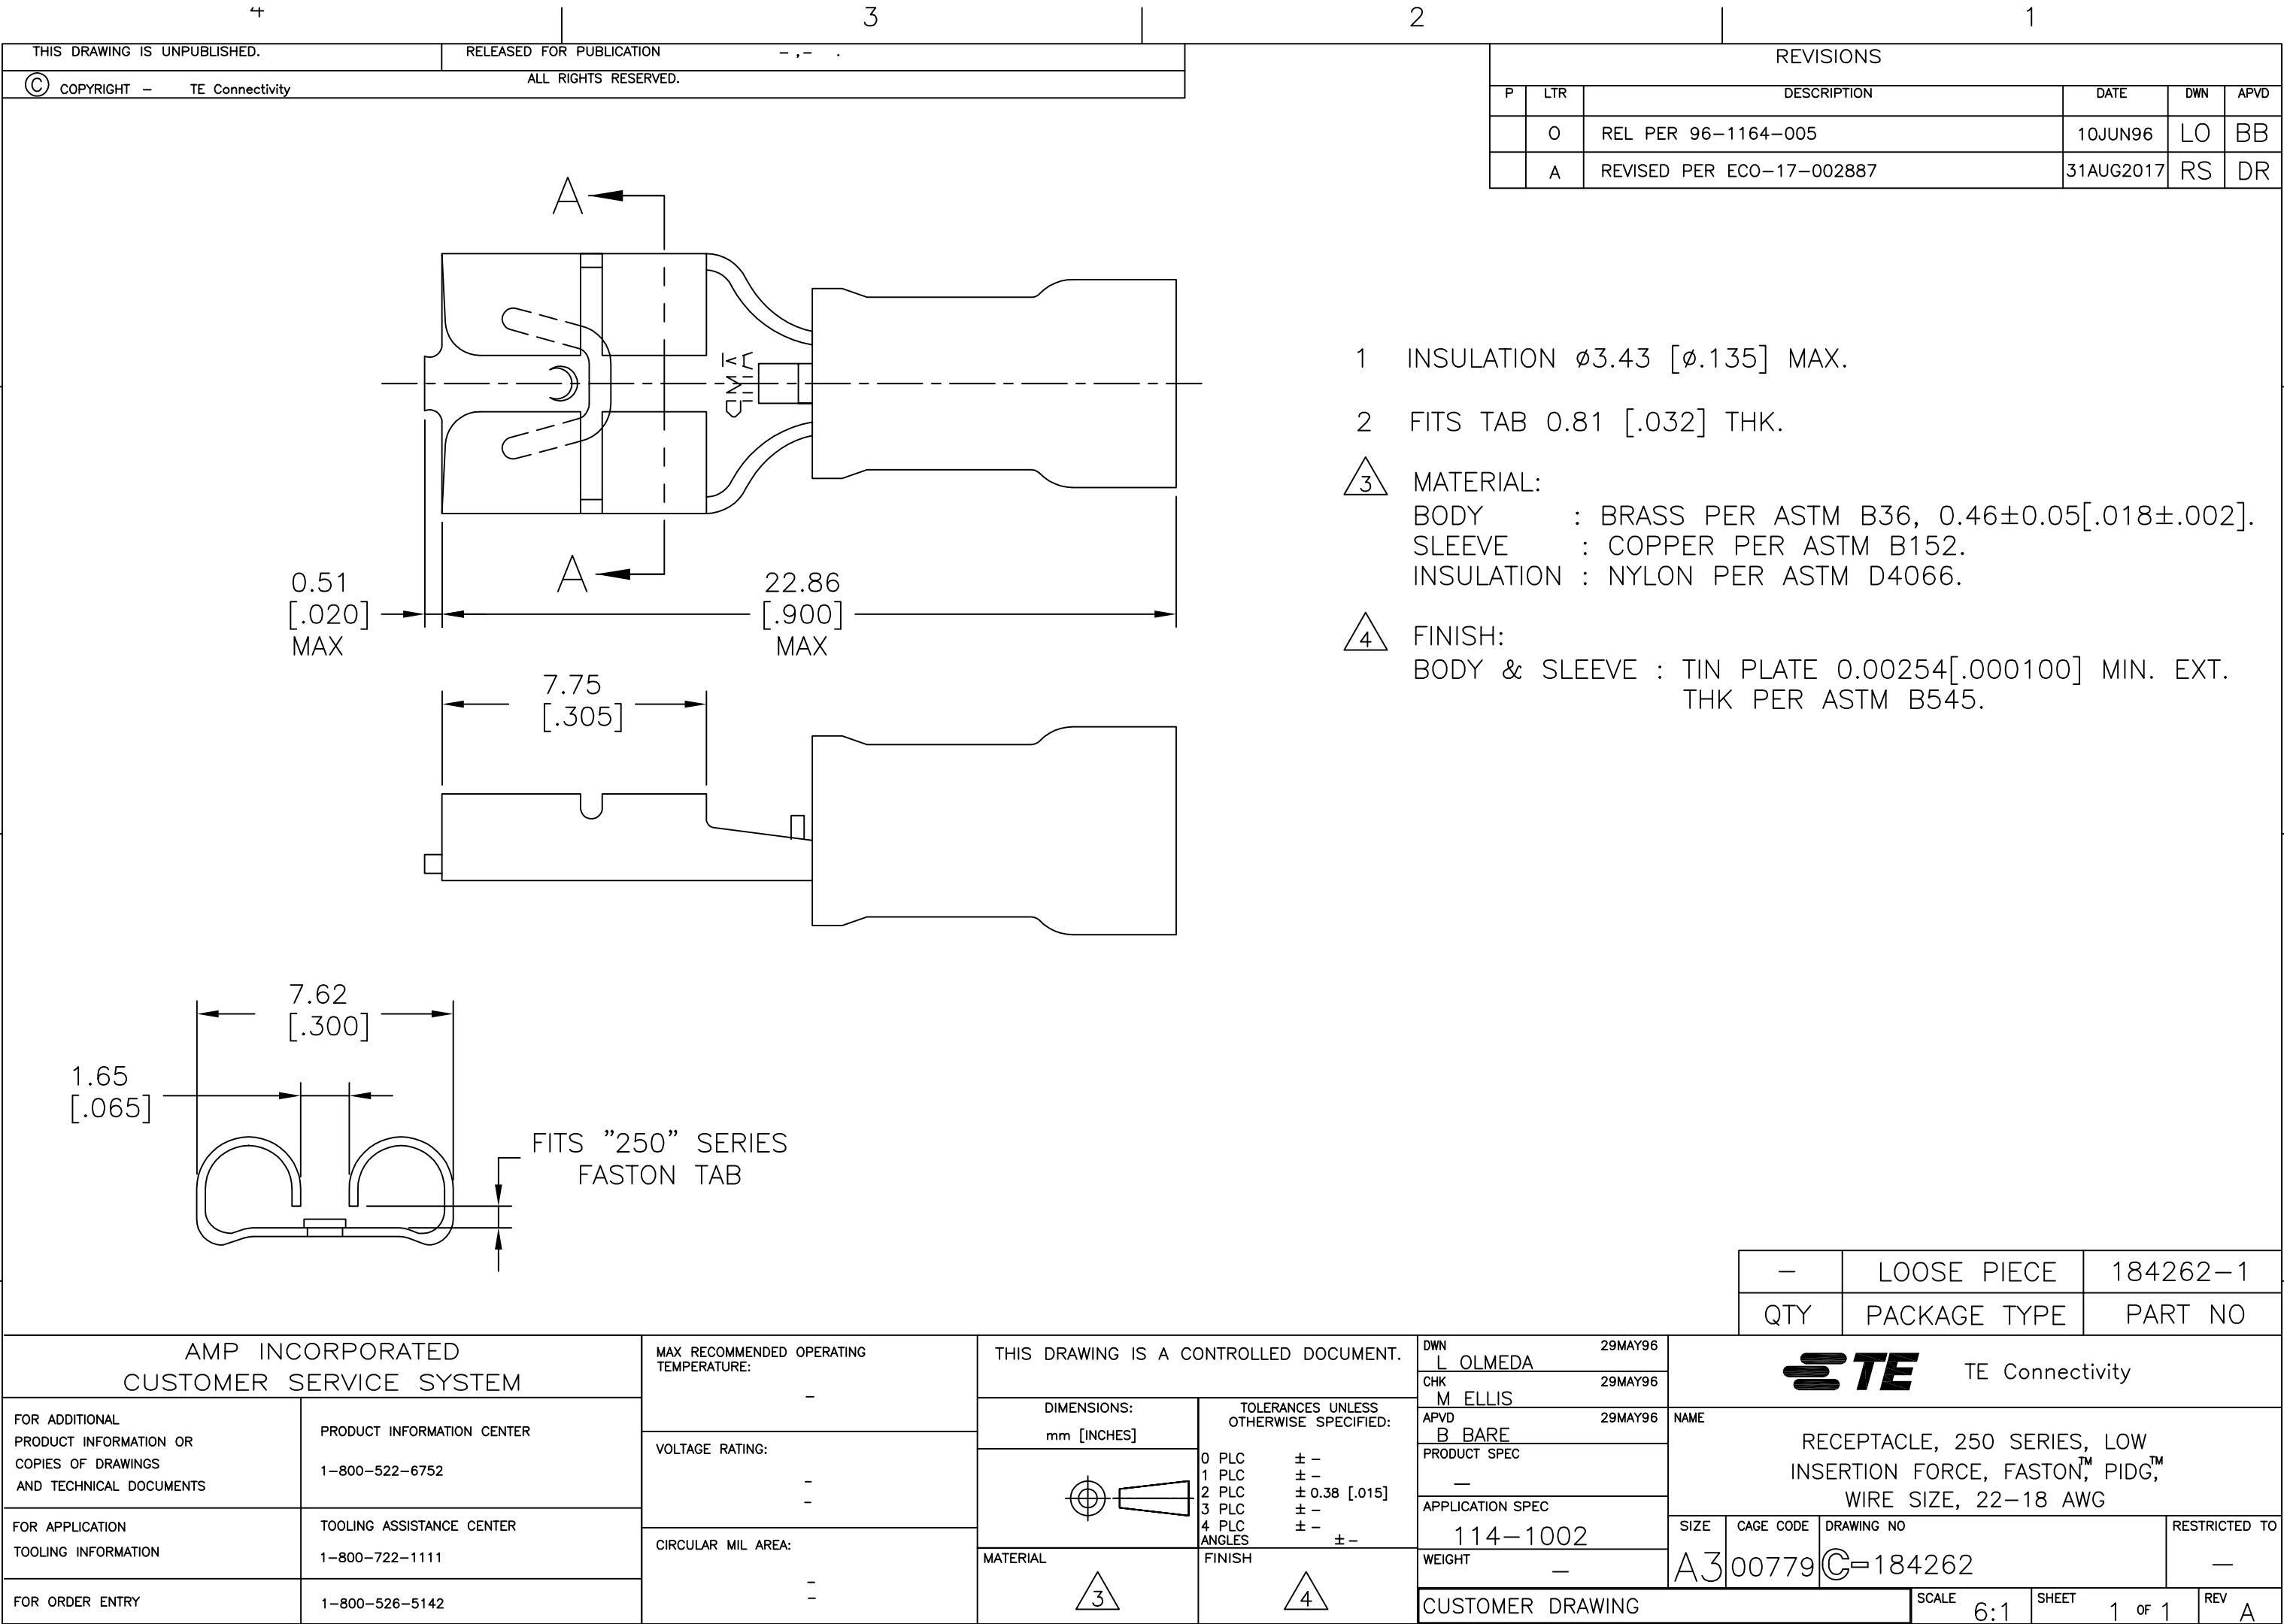

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	O	REL PER 96-1164-005	10JUN96	LO	BB
	A	REVISED PER ECO-17-002887	31AUG2017	RS	DR

- 1 INSULATION $\varnothing$ 3.43 [$\varnothing$.135] MAX.
- 2 FITS TAB 0.81 [.032] THK.
- 3

MATERIAL:
BODY : BRASS PER ASTM B36, 0.46 ± 0.05 [.018 $\pm$.002].
SLEEVE : COPPER PER ASTM B152.
INSULATION : NYLON PER ASTM D4066.
- 4

FINISH:
BODY & SLEEVE : TIN PLATE 0.00254 [.000100] MIN. EXT.
THK PER ASTM B545.

-	LOOSE PIECE	184262-1
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: -	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L OLMEDA 29MAY96		 TE Connectivity			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: - -	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.38 [.015] 3 PLC ± - 4 PLC ± - ANGLES ± -	CHK M ELLIS 29MAY96	NAME RECEPTACLE, 250 SERIES, LOW INSERTION FORCE, FASTON TM , PIDG TM , WIRE SIZE, 22-18 AWG			
	FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111				APVD B BARE 29MAY96		PRODUCT SPEC -		
FOR ORDER ENTRY		1-800-526-5142	CIRCULAR MIL AREA: - -			FINISH 			APPLICATION SPEC 114-1002	SIZE A3
	CUSTOMER DRAWING							SCALE 6:1	SHEET 1 OF 1	REV A