



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	EI	REVISED PER ECR-16-011494	21JUN2017	NK	CX

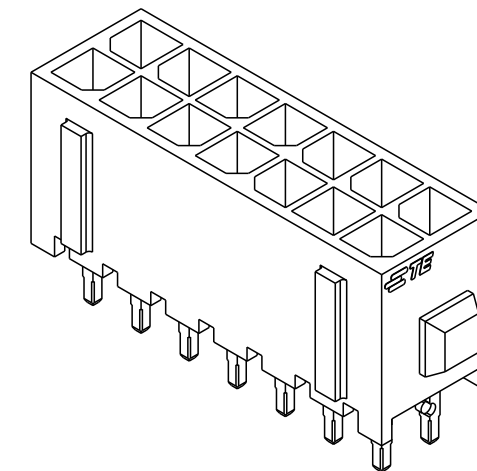

SECTION Z-Z

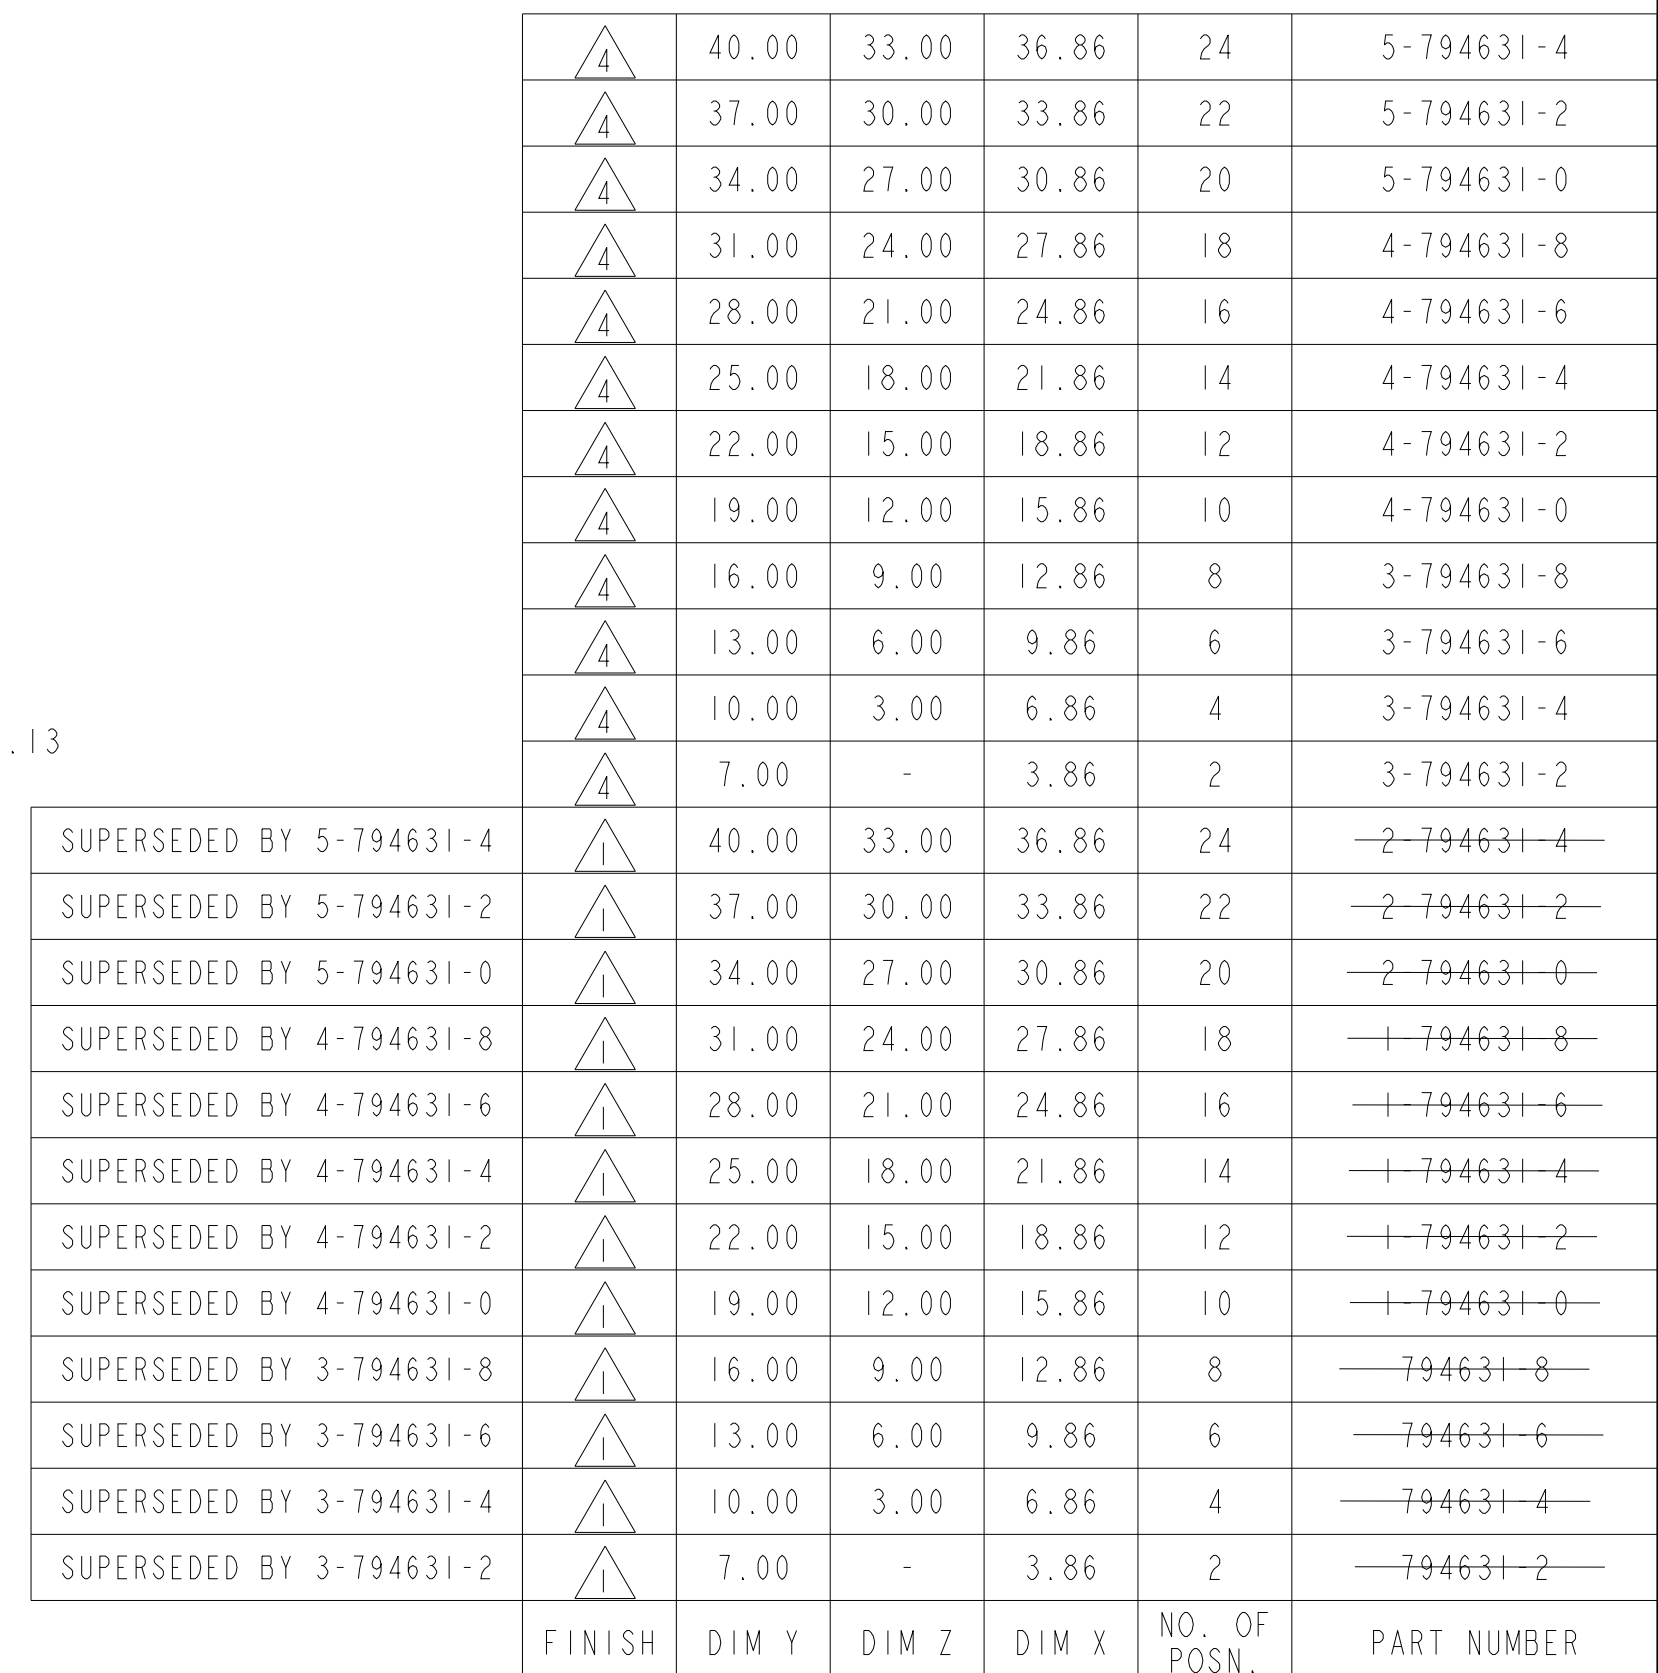

TYP
RECOMMENDED MOUNTING HOLE PATTERN 
SCALE 5:1

4 MATERIAL: HOUSING - NYLON, UL 94V-0, BLACK.
CONTACT - BRASS.
0.00038 MINIMUM GOLD OVER 0.00254
MINIMUM NICKEL ON MATING AREA. 0.00254
MATTE TIN MINIMUM OVER 0.00254 NICKEL
MINIMUM ON SOLDER TAILS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER 16AUG99		 TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK K. COBLE 16AUG99			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. COBLE 16AUG99		NAME VERTICAL HEADER ASSEMBLY, THRU HOLE, 15 GOLD, DUAL ROW, MICRO MATE-N-LOK™	
0 PLC ±- 1 PLC ±- 2 PLC ±0.20 [0.08] 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -			
MATERIAL 		SEE TABLE		SIZE A2	
		CUSTOMER DRAWING		CAGE CODE 00779	
				DRAWING NO C-794631	
				RESTRICTED TO -	
				SCALE 3:1	
				SHEET 1 OF 1	
				REV F	