
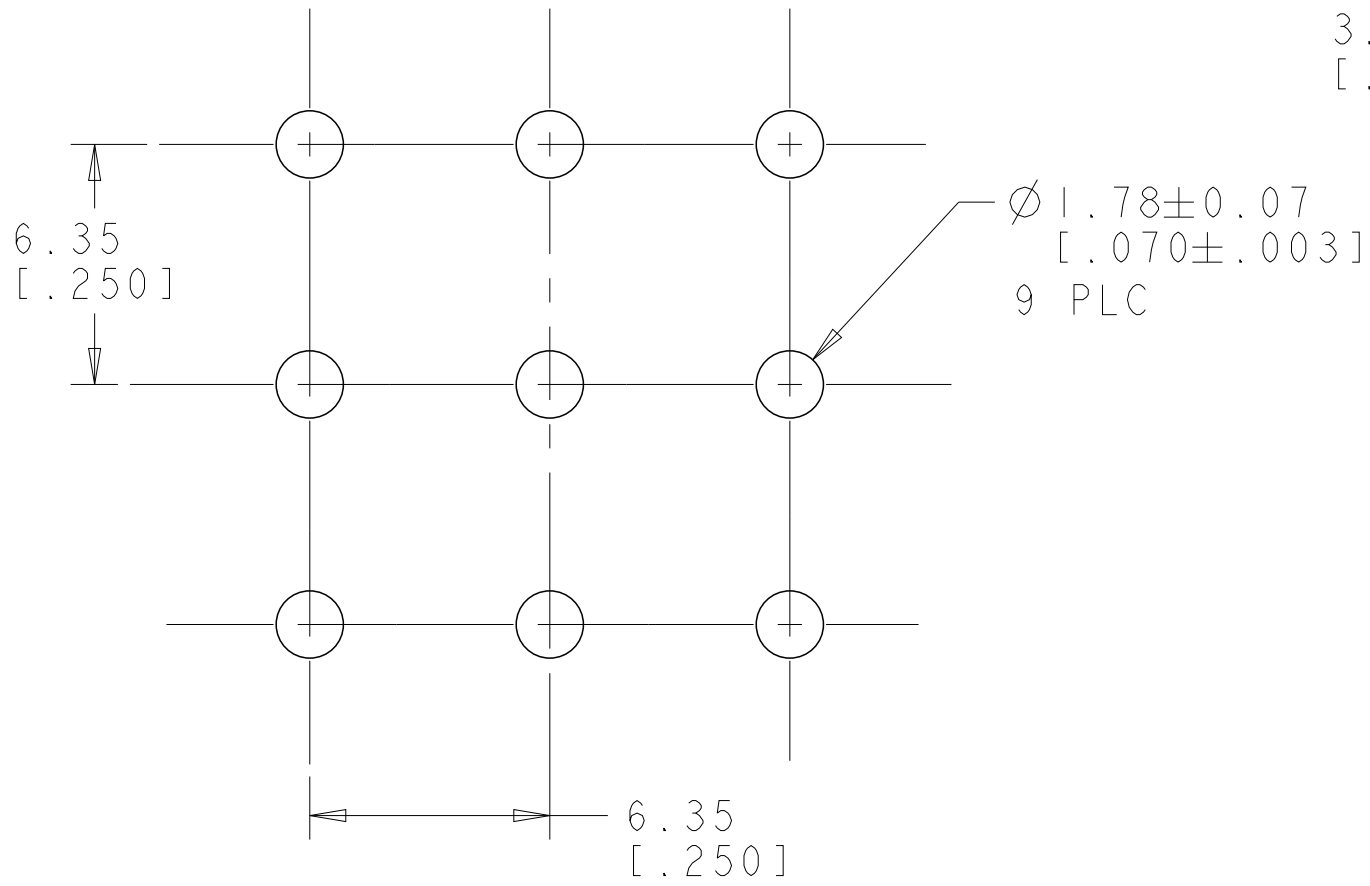
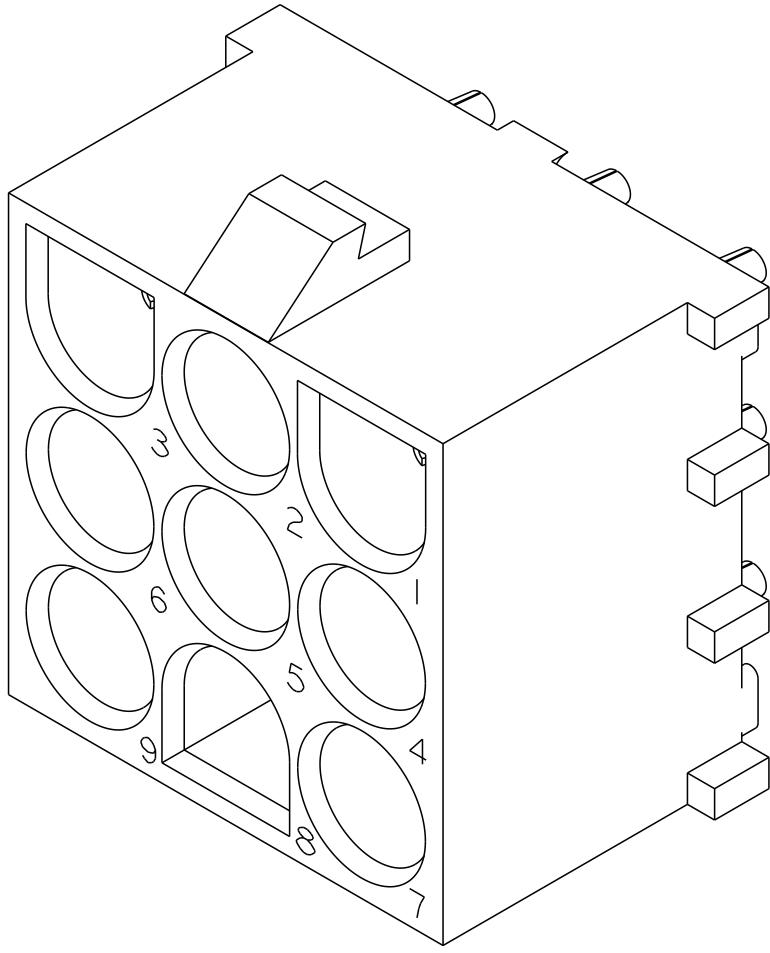
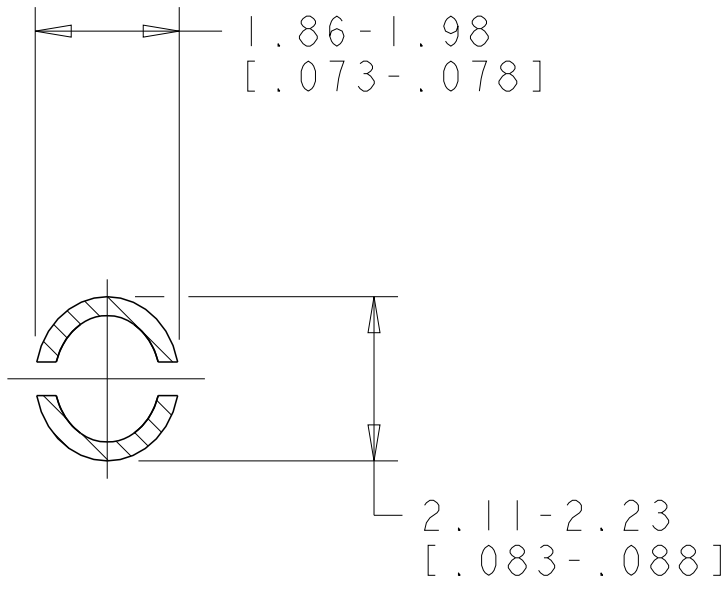
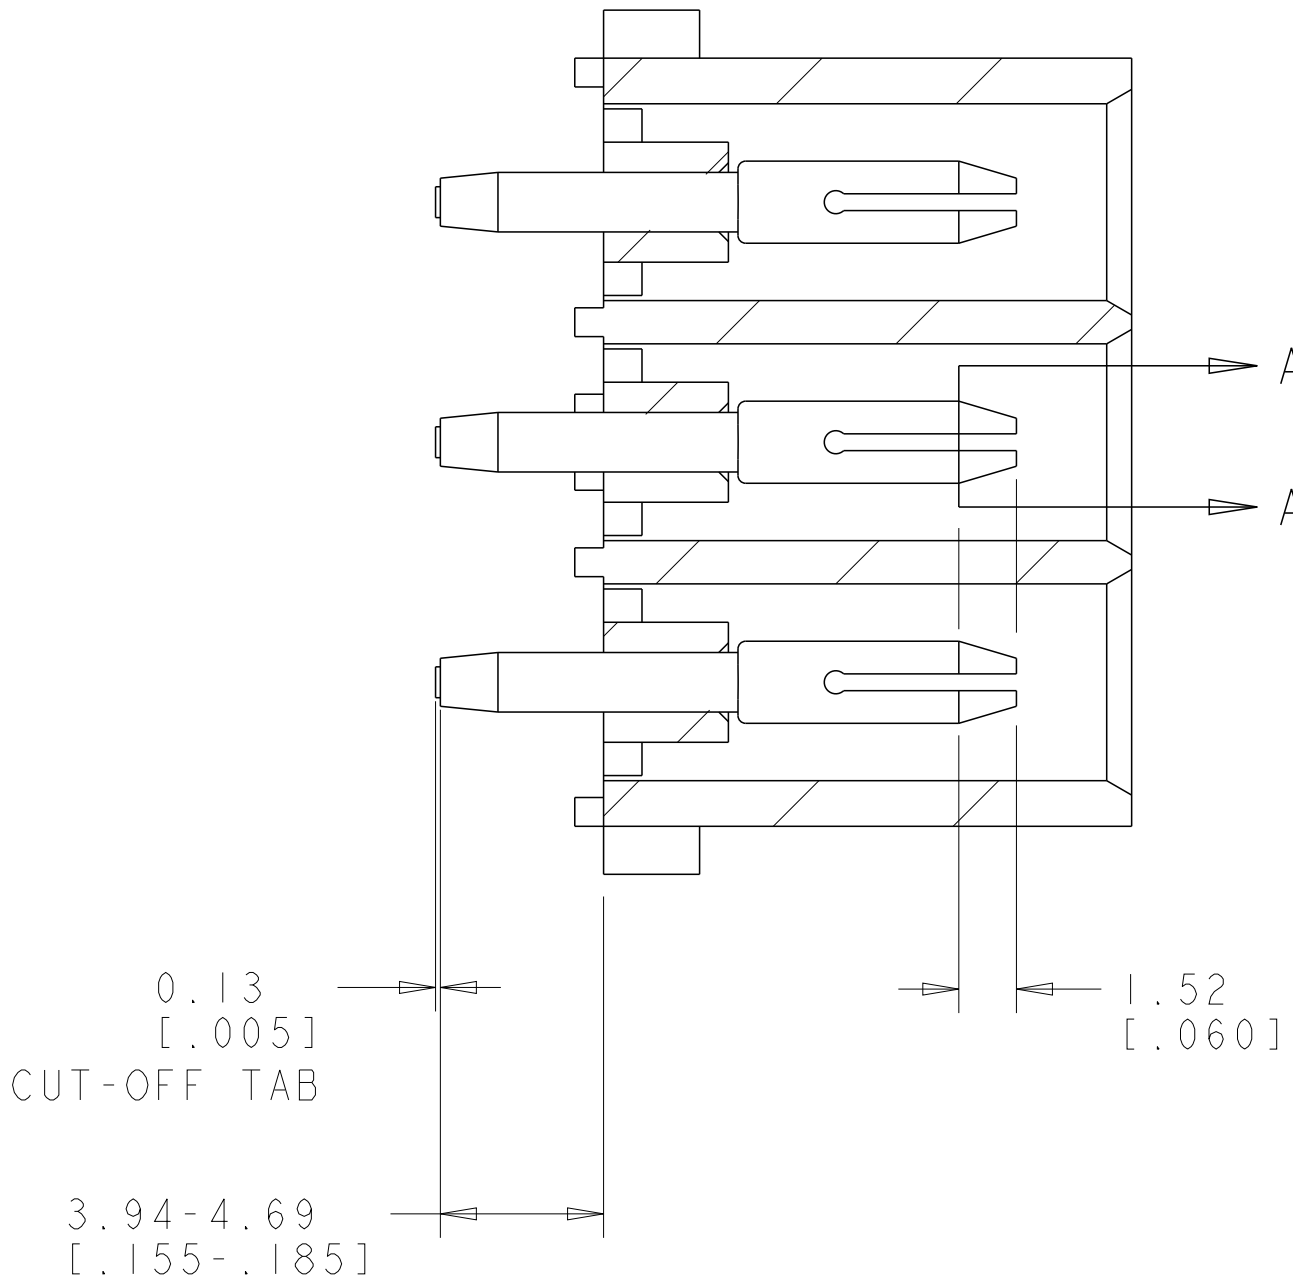
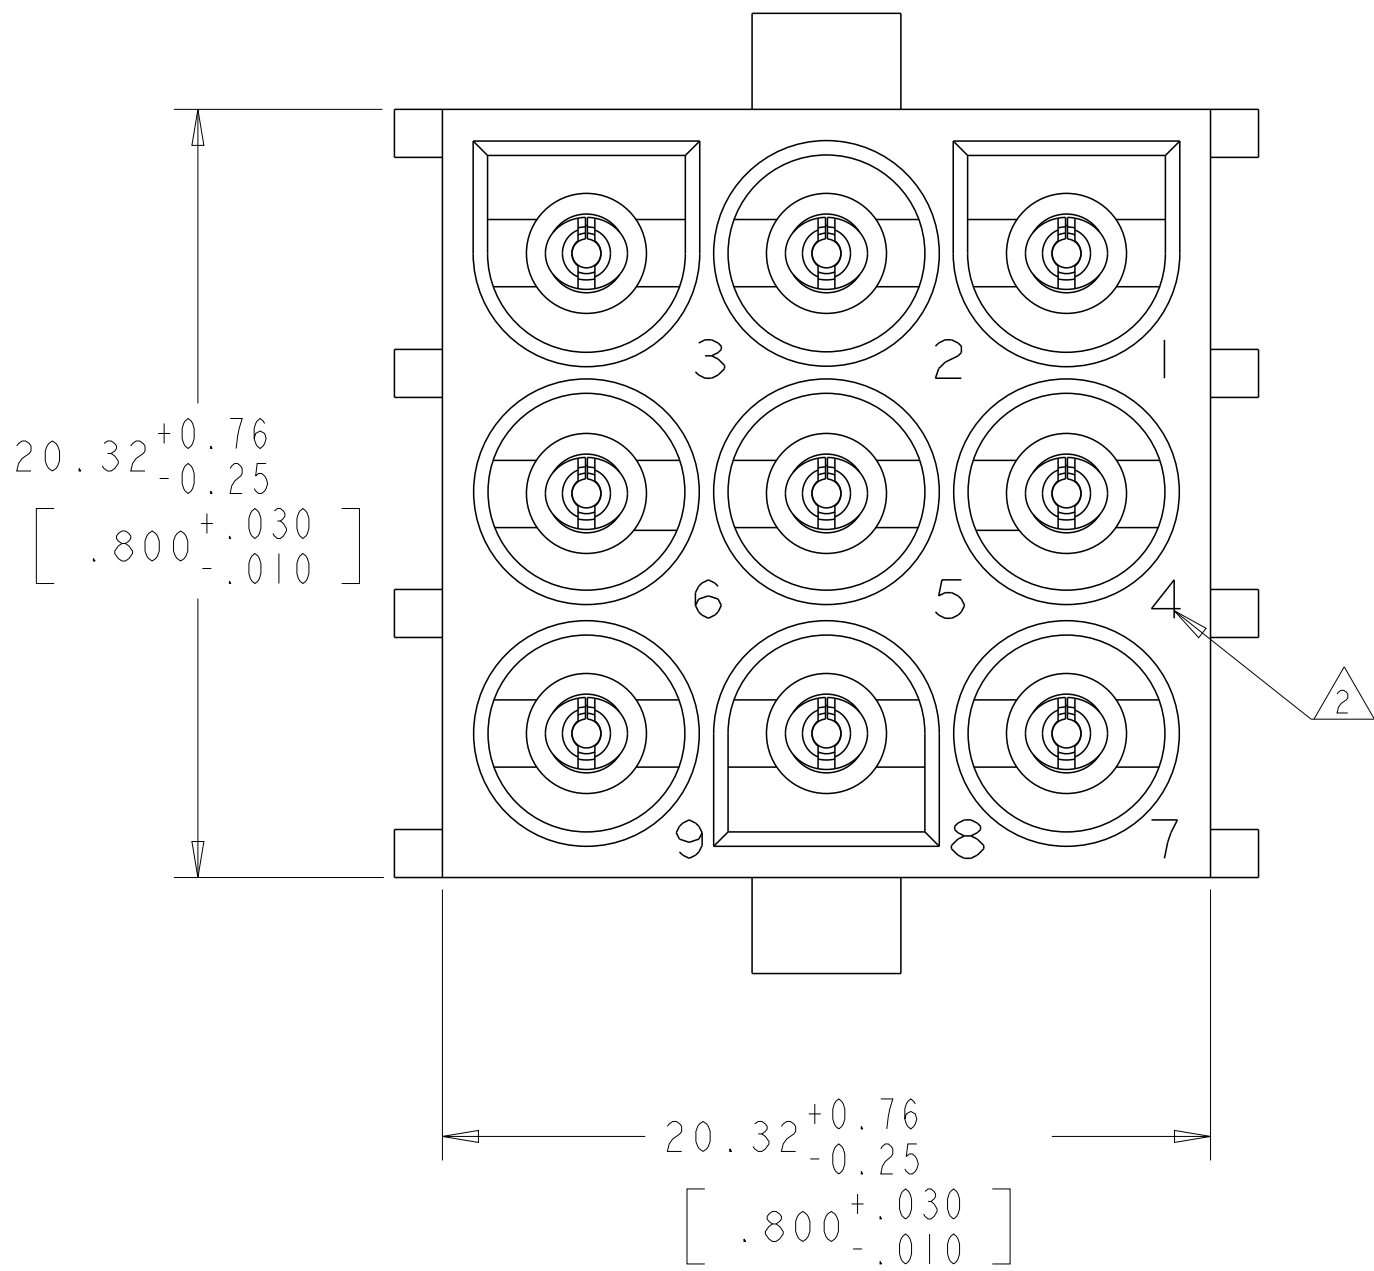
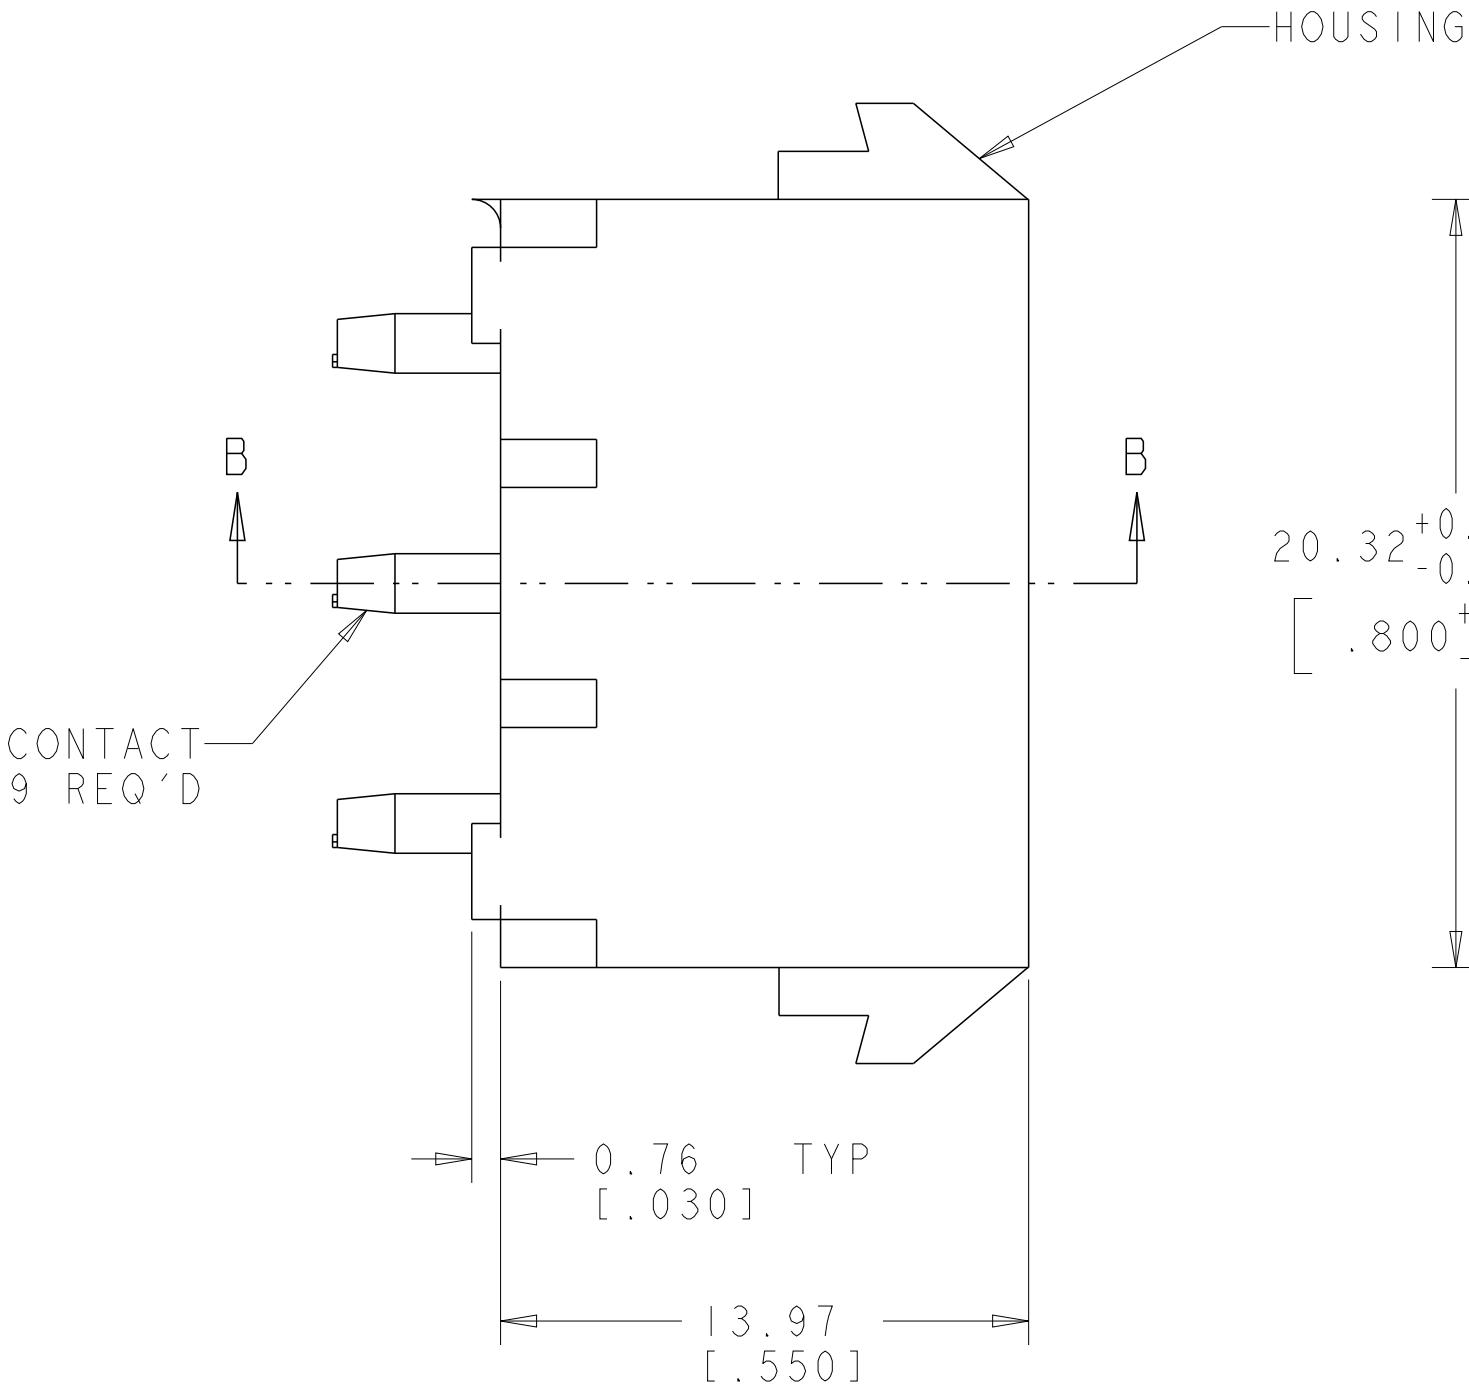


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECR-16-002640	10MAR2016	EW	EW

1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
2.  CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
3. FLAMMABILITY UL V-0 FOR THICKNESS 0.4, 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-11-10.
4. GLOW WIRE FLAMMABILITY (GWF1): 960°C FOR THICKNESS 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-2-12.
5. GLOW WIRE IGNITION (GWIT): 825°C FOR THICKNESS 0.45, 800°C FOR THICKNESS 0.8, 775°C FOR THICKNESS 1.6 AND 3.0 PER IEC 60695-2-13.

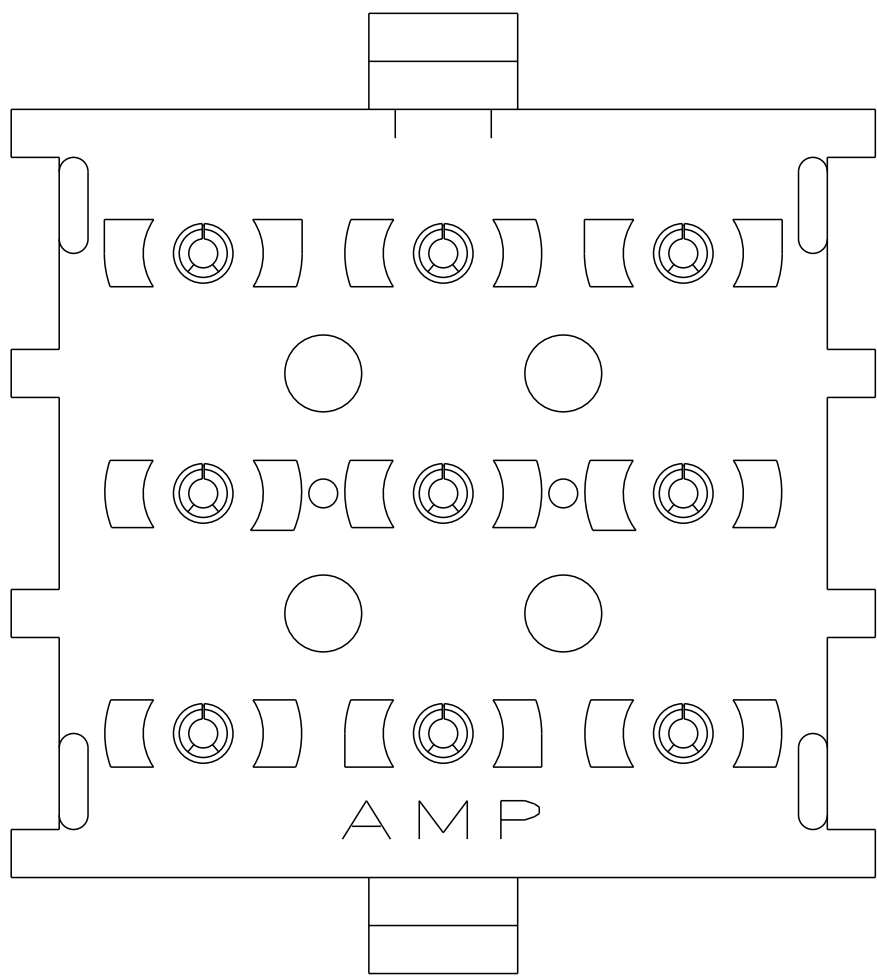

SECTION B-B

SECTION A-A
SCALE 10:1

SCALE 4:1

PHOSPOR BRONZE, PRE-TIN		NYLON, UL V-0 GW, NATURAL		1969818-1	
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR		PART NUMBER	
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm[INCHES] 		DWN: BASVESH WARAD 25DEC2015 CHK: WICKES, EVAN 25DEC2015 APVD: WICKES, EVAN 25DEC2015 PRODUCT SPEC: - APPLICATION SPEC: -		 TE Connectivity NAME: PIN HEADER ASSEMBLY, 9 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)	
MATERIAL: SEE TABLE		FINISH: SEE TABLE		WEIGHT: -	
-		-		CUSTOMER DRAWING: -	
				SCALE: 5:1 SHEET 1 OF 1 REV A	