



P.C. MOUNTING

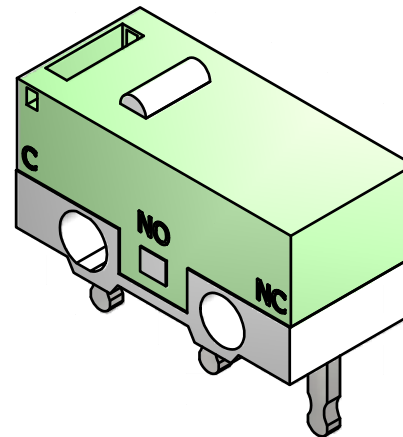



ISOMETRIC

▲	O.P. (MM)	P.T. (MM)
⊕	5.5 ± 0.2	0.5

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL



CIRCUIT: SPDT

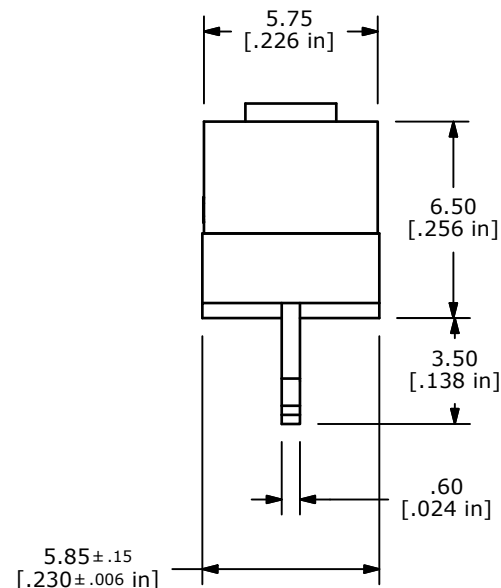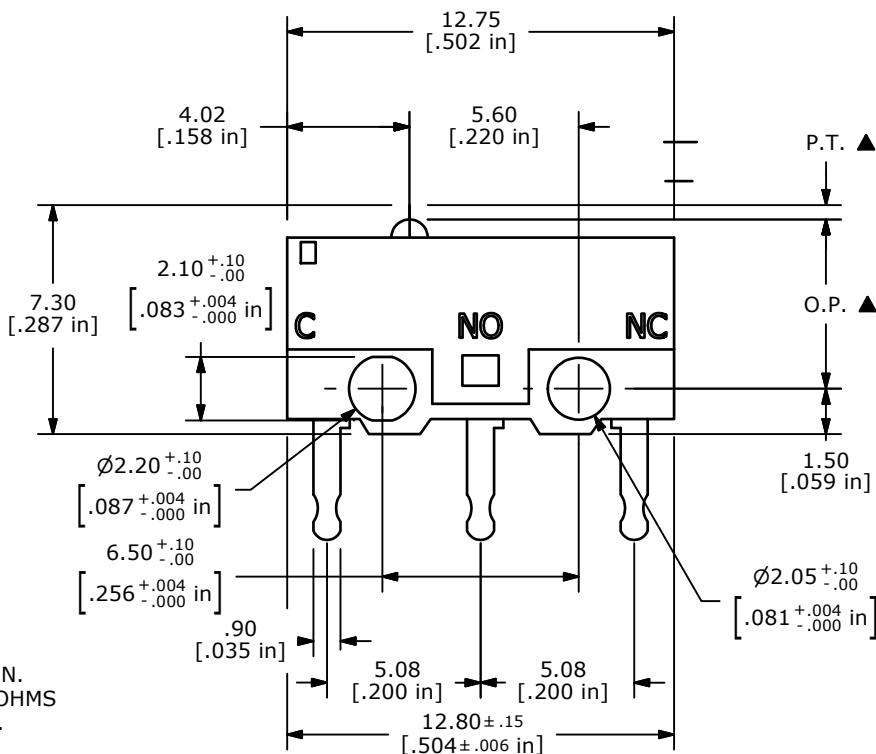

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X ± 0.4  
X.XX ± 0.25
- ▲ 3. RATING: 0.1A @ 5VAC
- ▲ 4. OPERATING FORCE: 125gf
5. OPERATING TEMP: -25°C TO 85°C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. MECHANICAL LIFE: 300,000 CYCLES MIN.
8. INSULATION RESISTANCE: 100 MEGA-OHMS
9. DIELECTRIC STRENGTH: 1000VAC-MIN.
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT



REV	PCR NO	DESCRIPTION	DATE	BY
C	20204	UPDATE DRAWING	10/11/11	BMA
B	17495	REVISED AND REDRAWN	7/23/07	BF

E-SWITCH®				
TITLE DM085Q100F125P1A				
SCALE	DATE	DR	DWG	REV
4:1	7/23/2007	BF	P030023	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED