



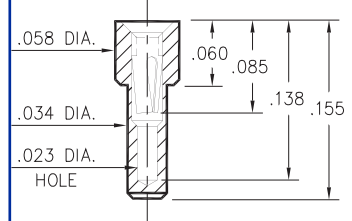









PIN RECEPTACLES
for .015" - .020" diameter pins (#11 contact)
and .015" - .022" diameter pins (#21 contact)
(see specific contact range on page 217)

**0548****0548-0-15-XX-21-XX-10-0**Solder mount in .036 min.
mounting hole**8975****8975-0-15-XX-21-XX-10-0**Solder mount in .036 min.
mounting hole**3016****3016-0-15-XX-21-XX-10-0**Solder mount in .036 min.
mounting hole**9548****9548-0-15-XX-21-XX-10-0**Solder mount in .036 min.
mounting hole**8637****8637-0-15-XX-21-XX-10-0**Solder mount in .037 min.
mounting hole**1407****1407-0-15-XX-11-XX-10-0**Solder mount in .040 min.
mounting hole**0553/8553****X553-X-15-XX-X1-XX-10-0**Hex press-fit in .041 plated
thru hole

Basic Part Number	Length L	Depth N
0553-1	.140	.124
0553-2	.170	.154
0553-3	.282	.266
8553-0	.245	.229

0566**0566-X-15-XX-21-XX-10-0**Solder mount in .039 min.
mounting hole

Basic Part Number	Length L
0566-1	.083
0566-2	.138

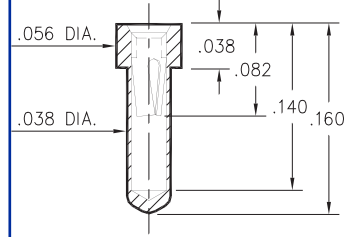0442**0442-0-15-XX-11-XX-10-0**Solder mount in .040 min.
mounting hole**0554****0554-0-15-XX-21-XX-10-0**Solder mount in .040 min.
mounting hole**SPECIFICATIONS****SHELL MATERIAL:**
Brass Alloy 360, 1/2 Hard**CONTACT MATERIAL:**
Beryllium Copper Alloy 172, HT**DIMENSION IN INCHES**
TOLERANCES ON:
LENGTHS: ±.005
DIAMETERS: ±.002
ANGLES: ± 2°**ORDER CODE: XXXX - X - 15 - XX - XX - XX - 10 - 0****BASIC PART #****SPECIFY SHELL FINISH:**

- 01 200μ" TIN/LEAD OVER NICKEL
- ◇ 80 200μ" TIN OVER NICKEL (RoHS)
- ◇ 15 10μ" GOLD OVER NICKEL (RoHS)

**SPECIFY CONTACT FINISH:**

- 02 100μ" TIN/LEAD OVER NICKEL
- ◇ 84 100μ" TIN OVER NICKEL (RoHS)
- ◇ 27 30μ" GOLD OVER NICKEL (RoHS)

SELECT CONTACT

#11 or #21 CONTACT (DATA ON PAGE 217)