


D


C

B


A

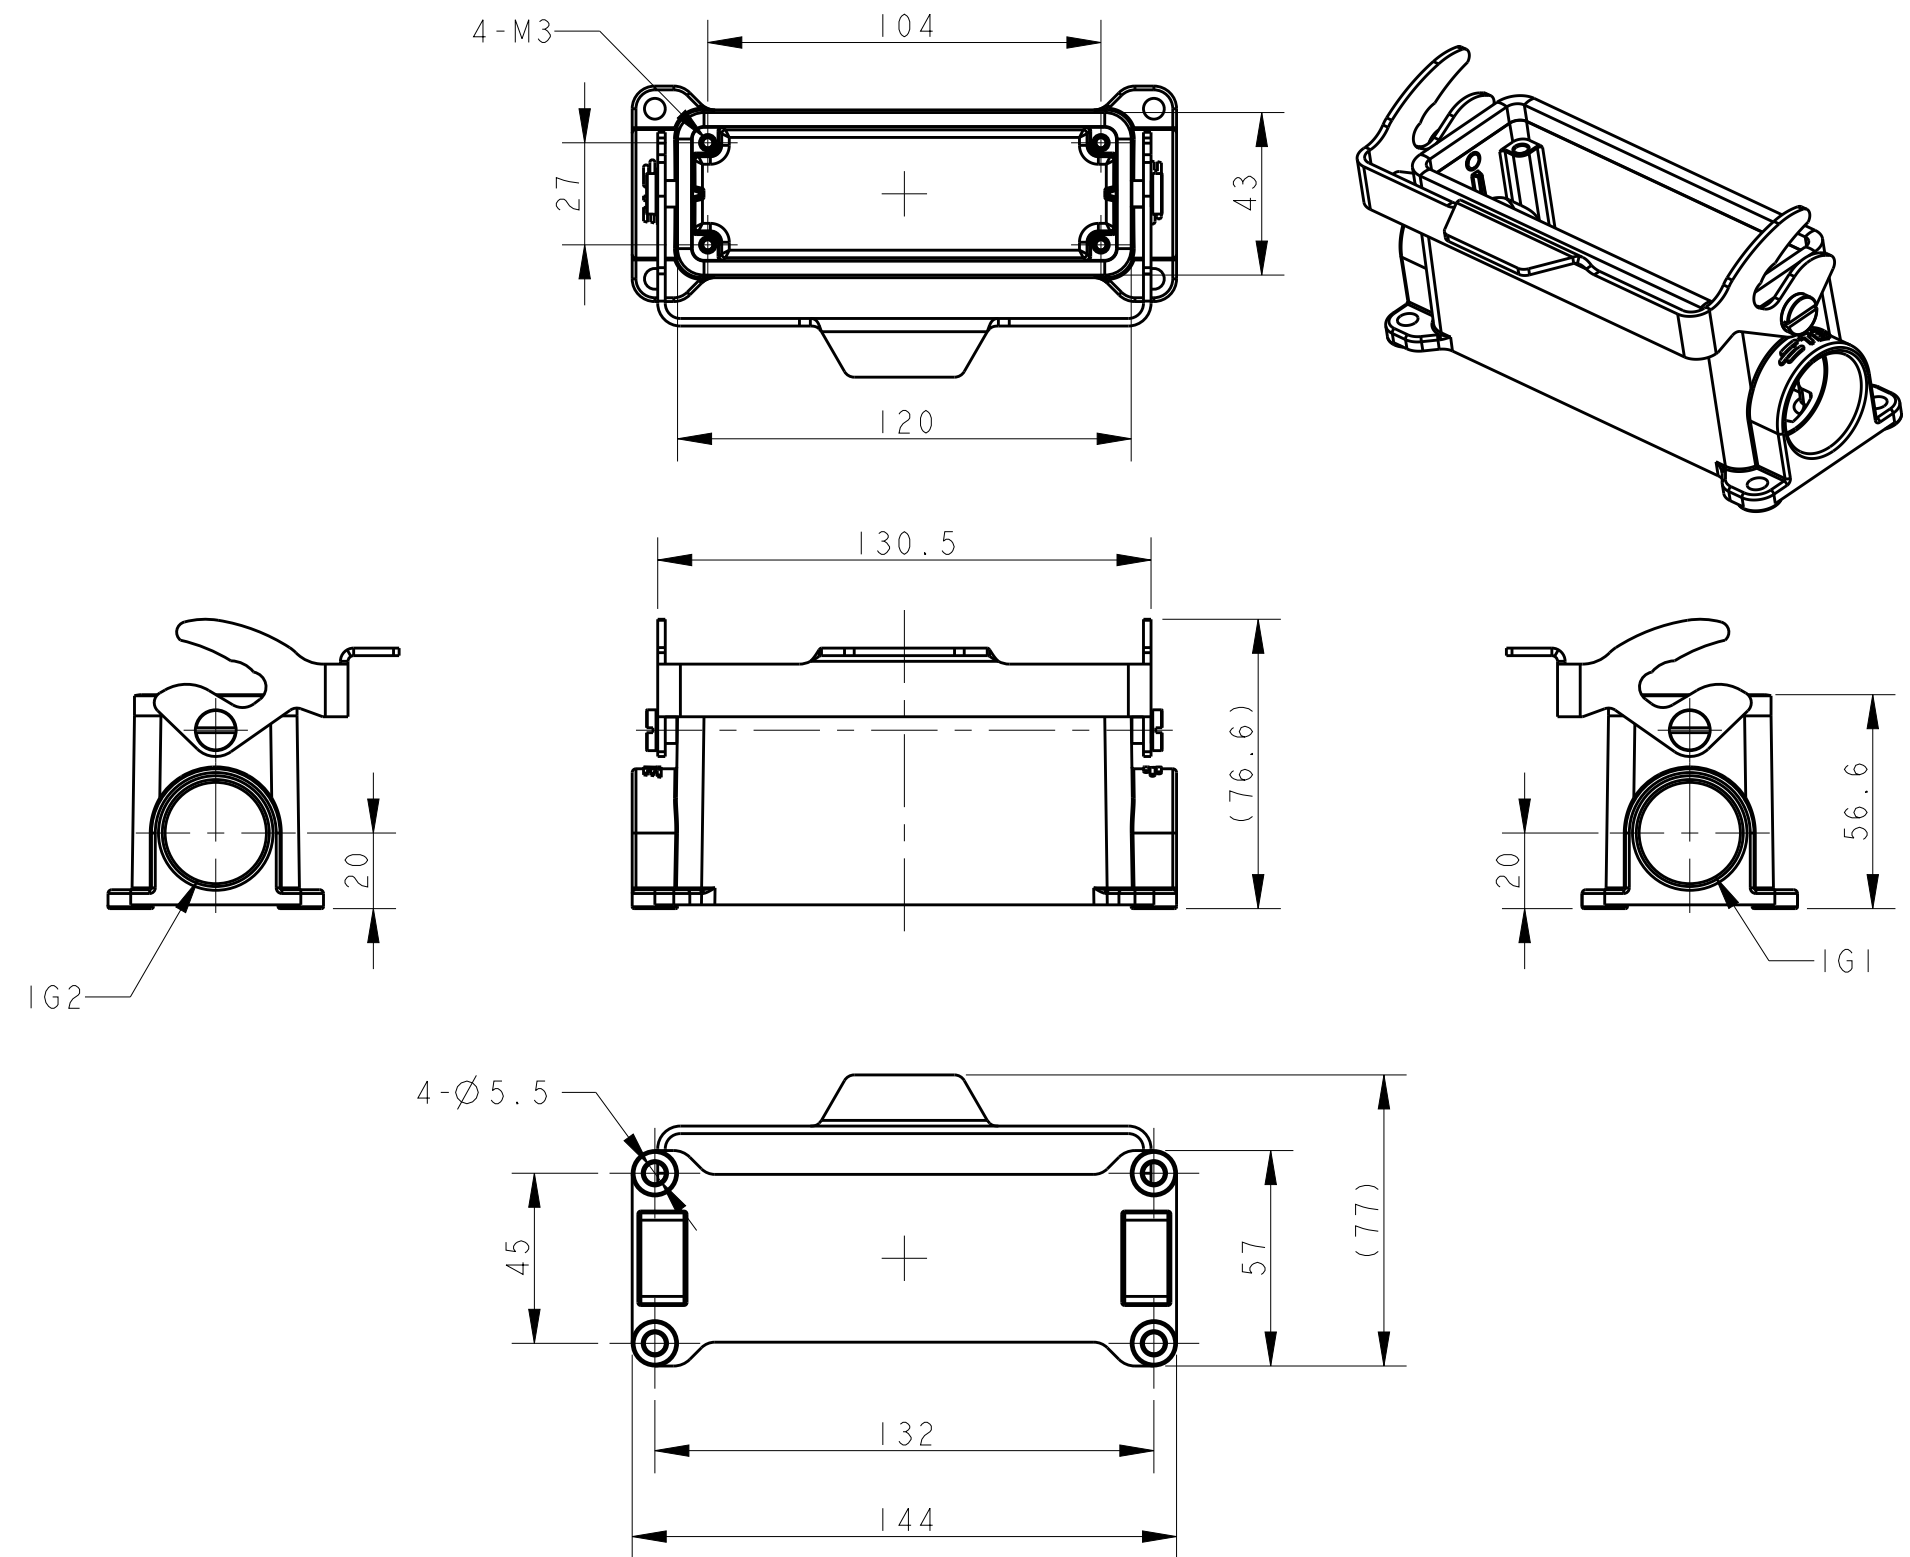

TYPE 1: BODY + SINGLE STEEL LOCKING

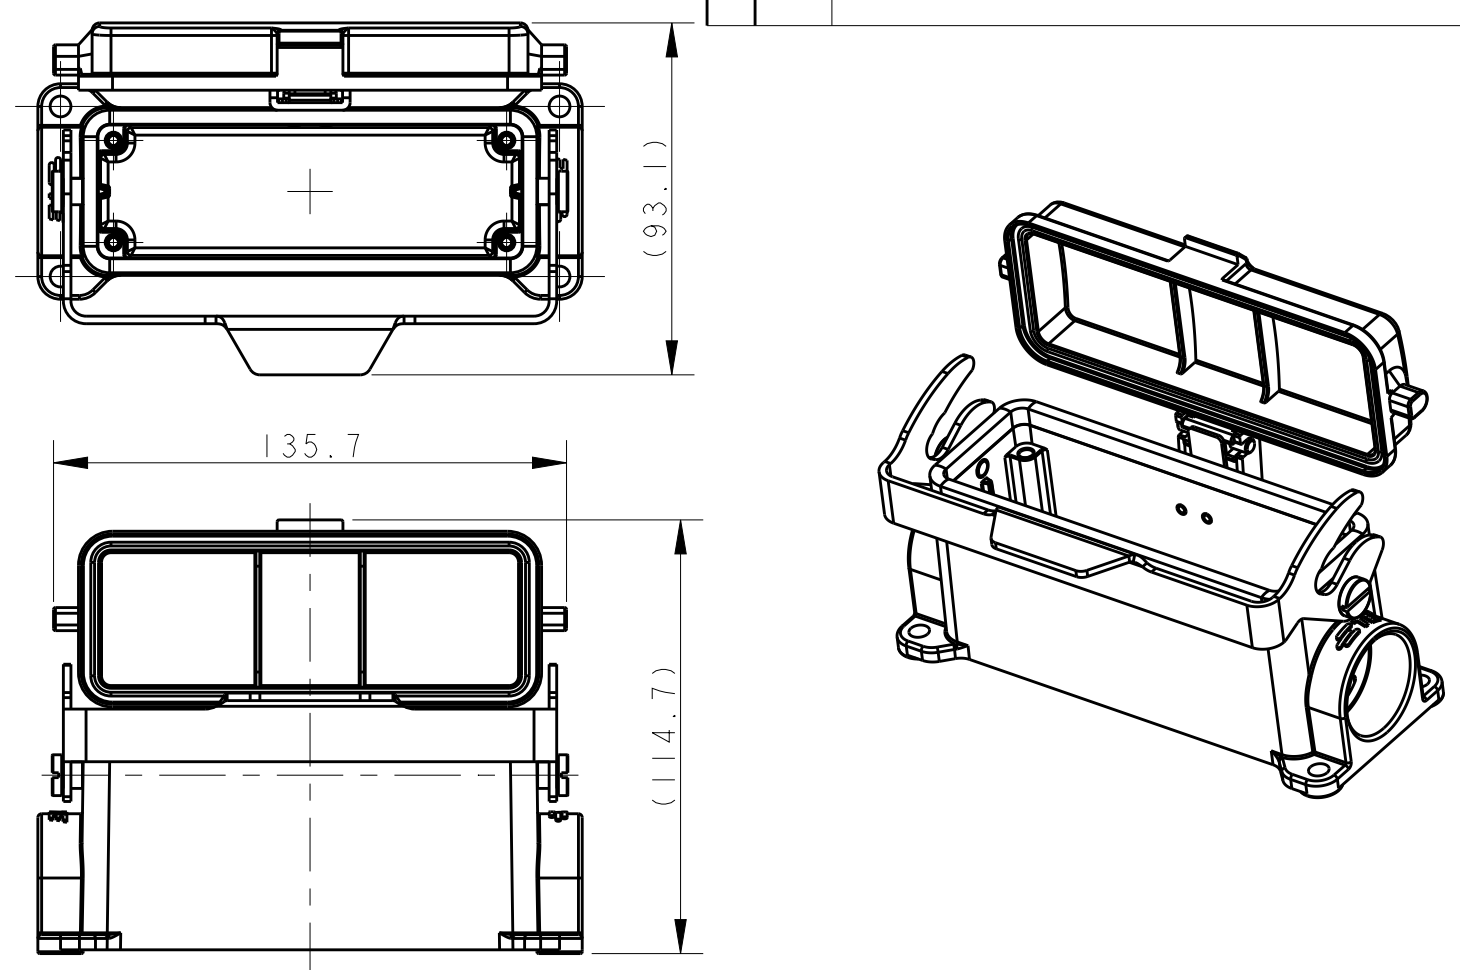

TYPE 2: BODY + SINGLE STEEL LOCKING + PLASTIC PROTECTION COVER
OTHER SPEC REFER TO TYPE 1

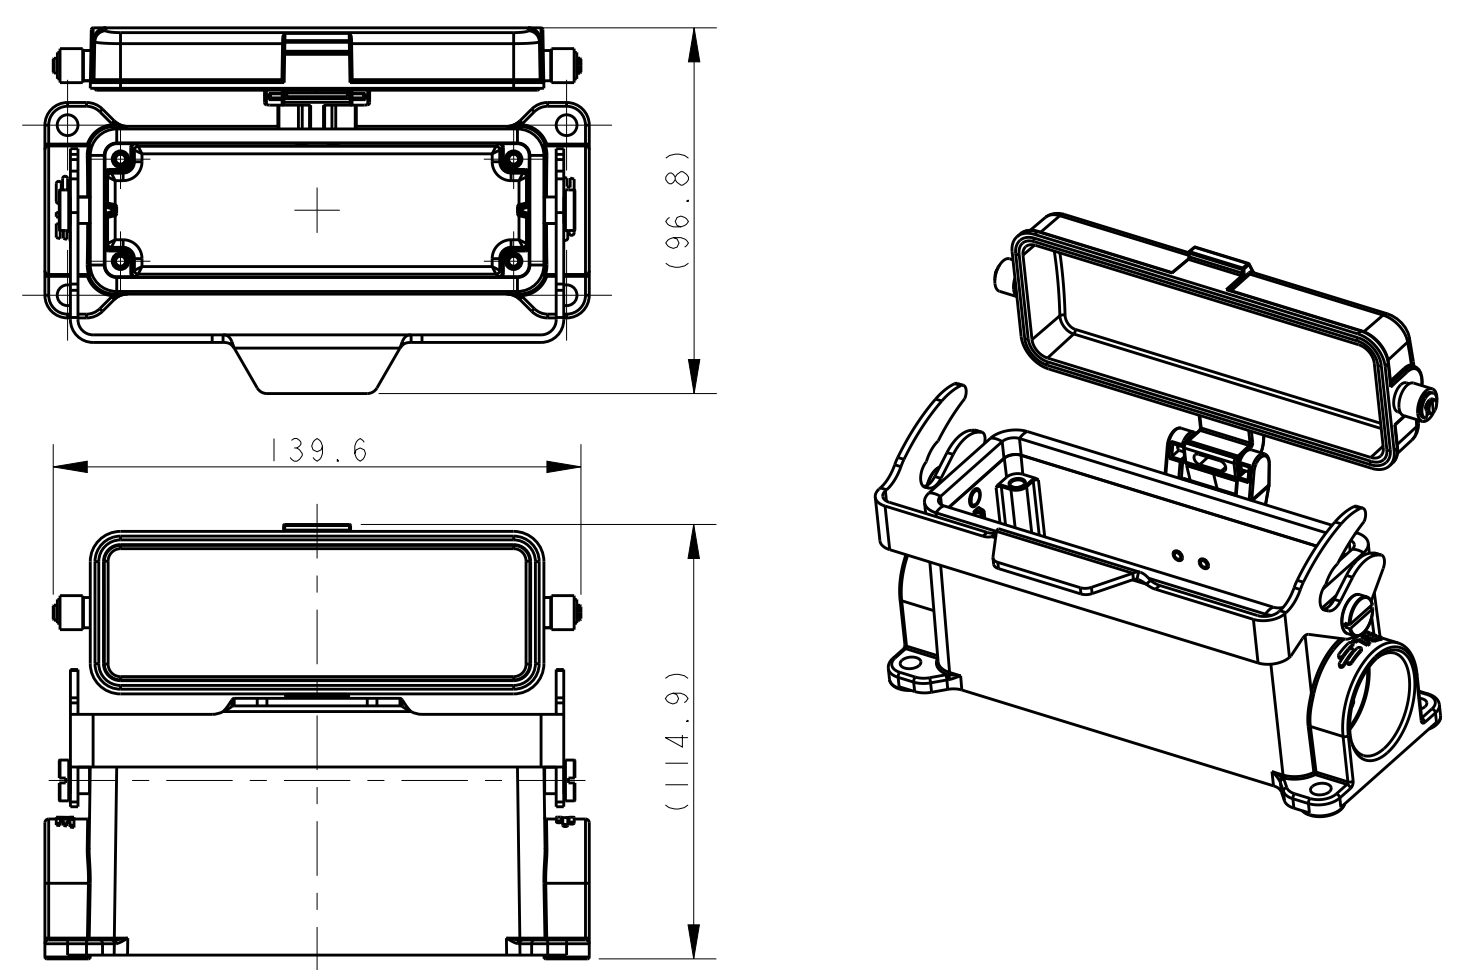

TYPE 3: BODY + SINGLE STEEL LOCKING + METAL PROTECTION COVER
OTHER SPEC REFER TO TYPE 1

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

TI610243121-000	TYPE 1	H24B-SGR-LB-PG21	PG21	-
TI610243125-000		H24B-SGR-LB-M25	M25	-
TI610243221-000		H24B-SGR-LB-2PG21	PG21	PG21
TI610243225-000		H24B-SGR-LB-2M25	M25	M25
TI620243121-000	TYPE 2	H24B-SDR-LB-PG21	PG21	-
TI620243125-000		H24B-SDR-LB-M25	M25	-
TI620243221-000		H24B-SDR-LB-2PG21	PG21	PG21
TI620243225-000		H24B-SDR-LB-2M25	M25	M25
TI620243421-000	TYPE 3	H24B-SDRM-LB-PG21	PG21	-
TI620243425-000		H24B-SDRM-LB-M25	M25	-
TI620243321-000		H24B-SDRM-LB-2PG21	PG21	PG21
TI620243325-000		H24B-SDRM-LB-2M25	M25	M25
ASSEMBLY PART NUMBER	TYPE	ASSEMBLY PART DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	-
	-

MATERIAL

TBD

-

DWN DAVID LI 02JUL2015

CHK CHRIS WANG 02JUL2015

APVD XU XIANG 02JUL2015

PRODUCT SPEC 108-137013

APPLICATION SPEC 114-137013



WEIGHT -

Customer Drawing

TE Connectivity

NAME H24B-SGR/SDR/SDRM-LB-PG/M

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	-	©-TI6X0243XXXX00	-
SCALE 1:2	SHEET 1	OF 2	REV A

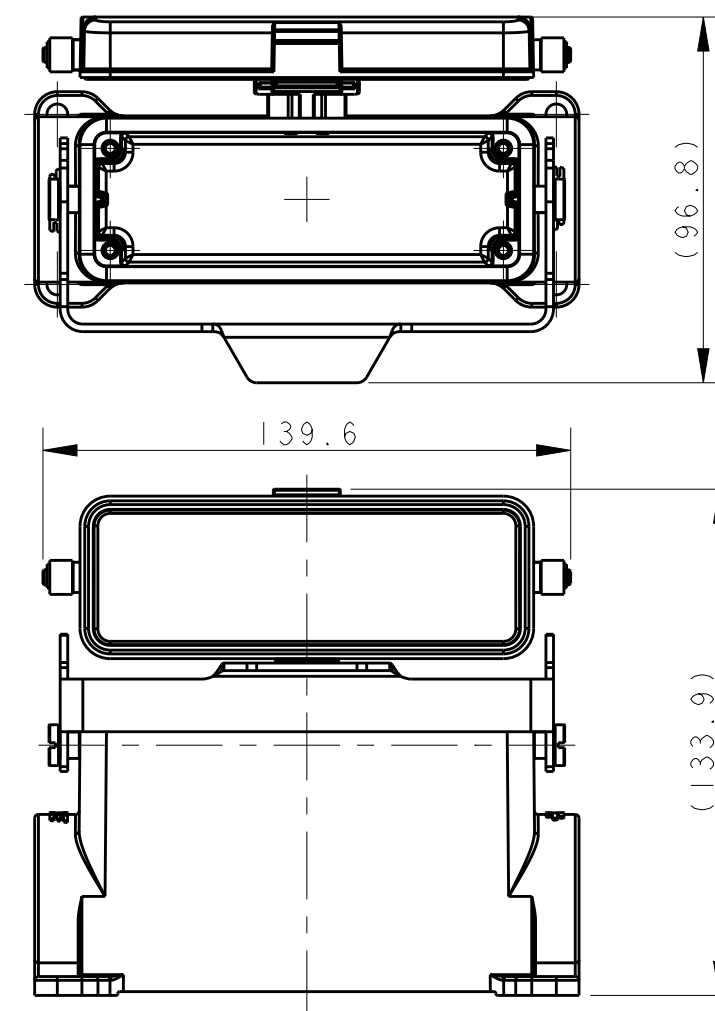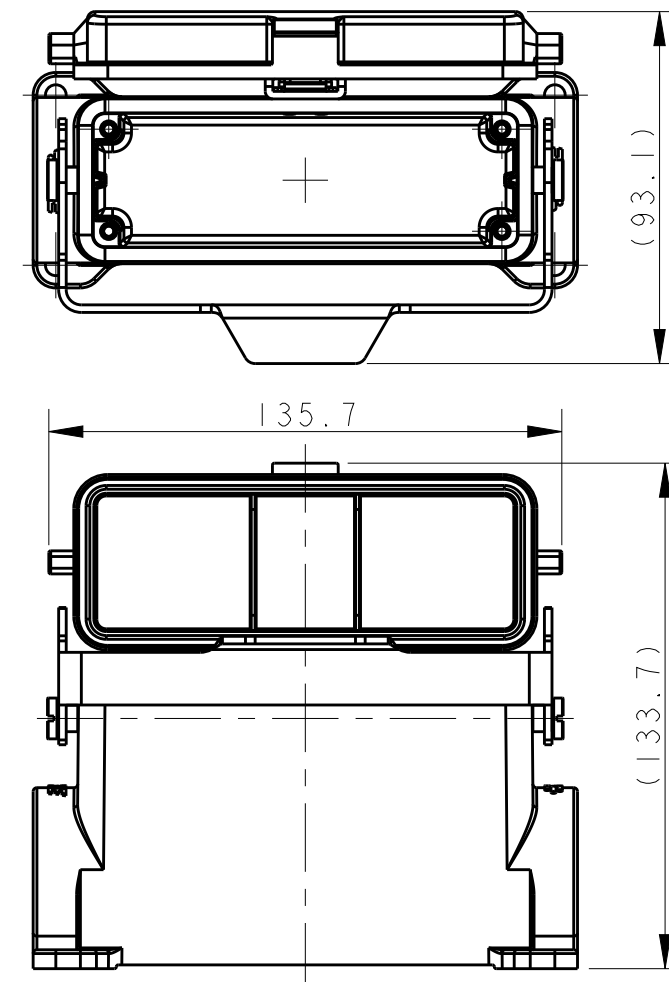

T1650243121-000	TYPE 4	H24B-SGRH-LB-PG21	PG21	-
T1650243129-000		H24B-SGRH-LB-PG29	PG29	-
T1650243132-000		H24B-SGRH-LB-M32	M32	-
T1650243221-000		H24B-SGRH-LB-2PG21	PG21	PG21
T1650243229-000		H24B-SGRH-LB-2PG29	PG29	PG29
T1650243232-000		H24B-SGRH-LB-2M32	M32	M32
T1660243121-000	TYPE 5	H24B-SDRH-LB-PG21	PG21	-
T1660243129-000		H24B-SDRH-LB-PG29	PG29	-
T1660243132-000		H24B-SDRH-LB-M32	M32	-
T1660243221-000		H24B-SDRH-LB-2PG21	PG21	PG21
T1660243229-000		H24B-SDRH-LB-2PG29	PG29	PG29
T1660243232-000		H24B-SDRH-LB-2M32	M32	M32
T1660243121-100	TYPE 6	H24B-SDRHM-LB-PG21	PG21	-
T1660243129-100		H24B-SDRHM-LB-PG29	PG29	-
T1660243132-100		H24B-SDRHM-LB-M32	M32	-
T1660243221-100		H24B-SDRHM-LB-2PG21	PG21	PG21
T1660243229-100		H24B-SDRHM-LB-2PG29	PG29	PG29
T1660243232-100		H24B-SDRHM-LB-2M32	M32	M32
ASSEMBLY PART NUMBER	TYPE	ASSEMBLY PART DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 02 JUL 2015		 TE Connectivity			
		CHR CHRIS WANG 02 JUL 2015					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME H24B-SGR/SDR/SDRM-LB-PG/M			
mm		APVD XU XIANG 02 JUL 2015					
		PRODUCT SPEC 108-137013		SIZE A2 CAGE CODE - DRAWING NO C-T16X0243XXXX00 RESTRICTED TO -			
		APPLICATION SPEC 114-137013					
		WEIGHT -					
MATERIAL TBD - -		FINISH - - -		SCALE 1:2 SHEET 2 of 2 REV A			