

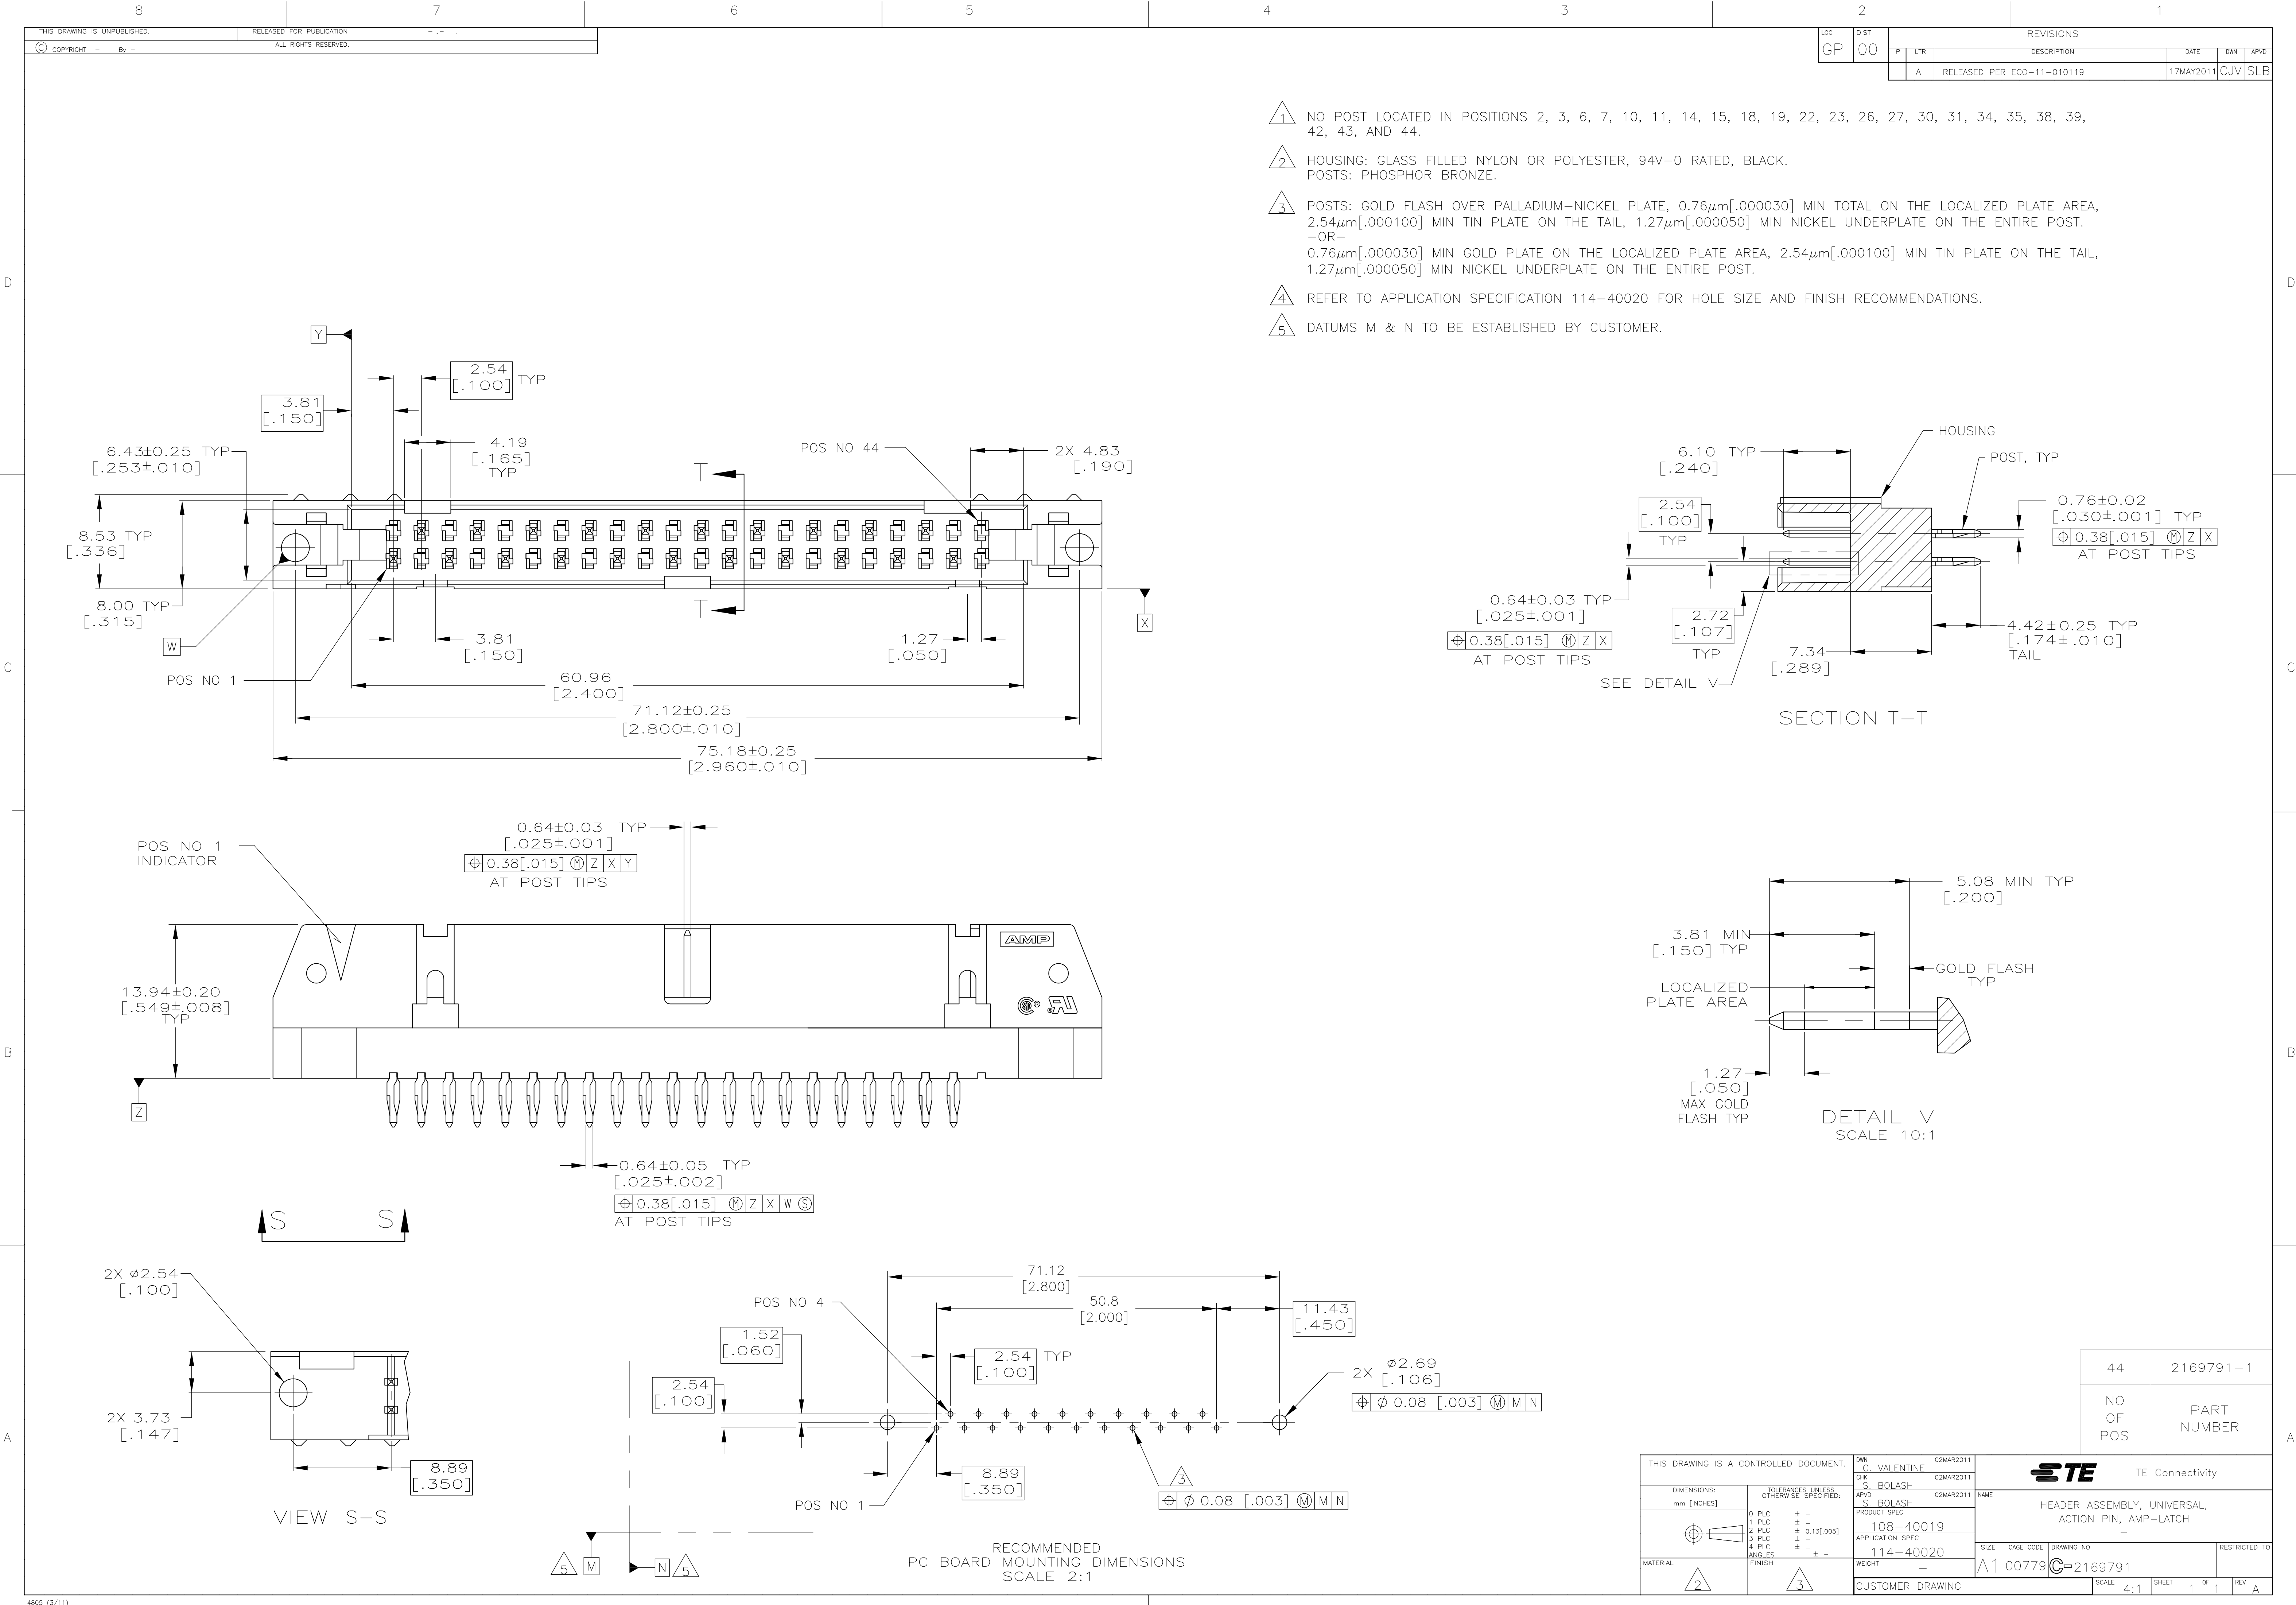


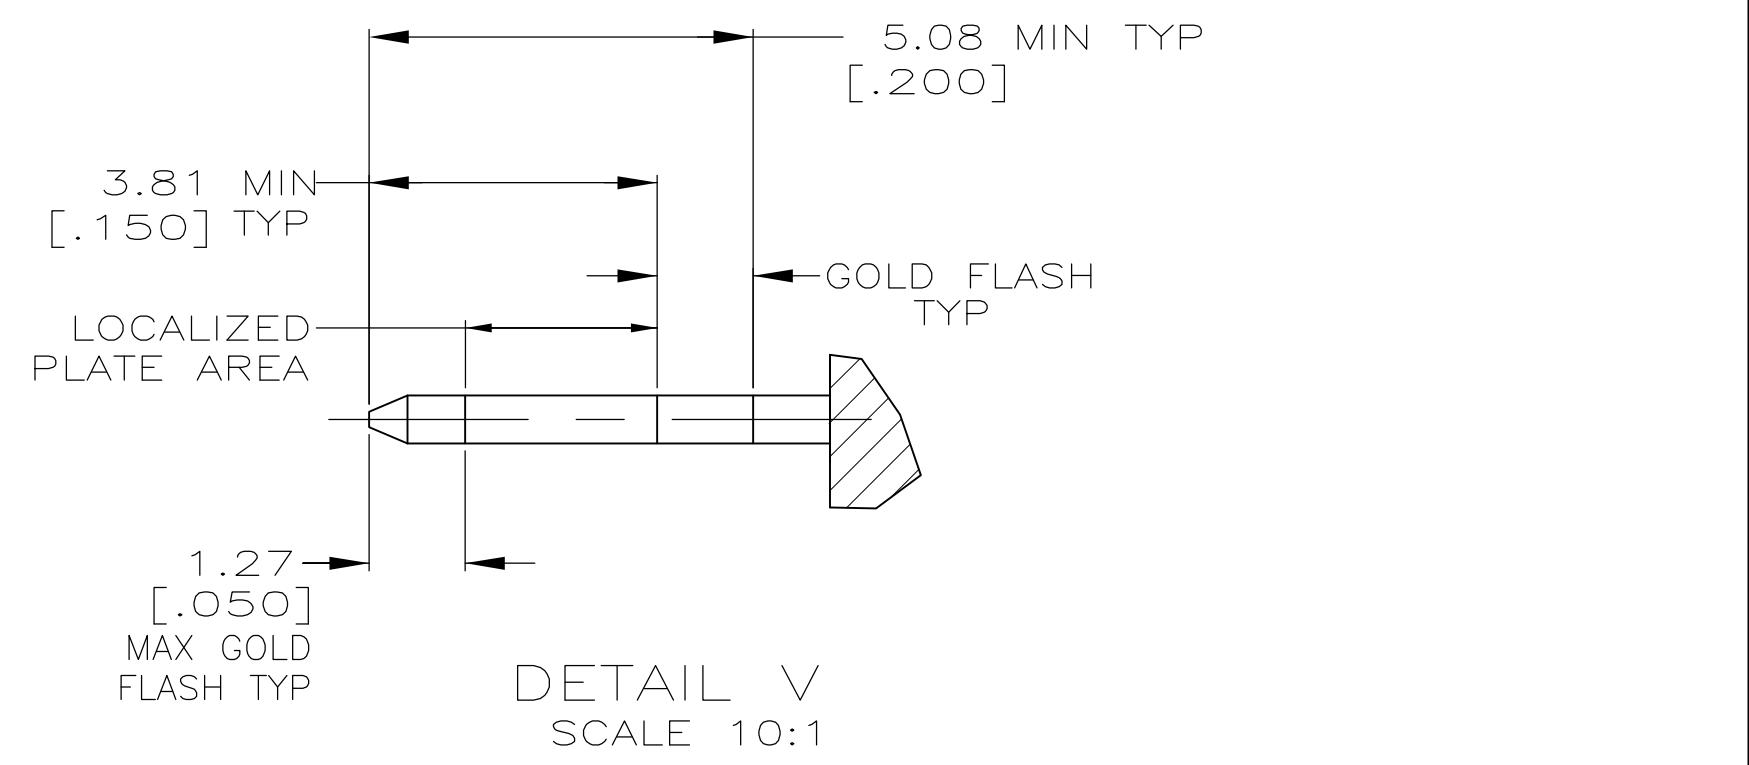

- 1 NO POST LOCATED IN POSITIONS 2, 3, 6, 7, 10, 11, 14, 15, 18, 19, 22, 23, 26, 27, 30, 31, 34, 35, 38, 39, 42, 43, AND 44.
- 2 HOUSING: GLASS FILLED NYLON OR POLYESTER, 94V-0 RATED, BLACK.
POSTS: PHOSPHOR BRONZE.
- 3 POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, $0.76\mu\text{m}$ [.000030] MIN TOTAL ON THE LOCALIZED PLATE AREA, $2.54\mu\text{m}$ [.000100] MIN TIN PLATE ON THE TAIL, $1.27\mu\text{m}$ [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
 $0.76\mu\text{m}$ [.000030] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, $2.54\mu\text{m}$ [.000100] MIN TIN PLATE ON THE TAIL, $1.27\mu\text{m}$ [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- 4 REFER TO APPLICATION SPECIFICATION 114-40020 FOR HOLE SIZE AND FINISH RECOMMENDATIONS.
- 5 DATUMS M & N TO BE ESTABLISHED BY CUSTOMER.

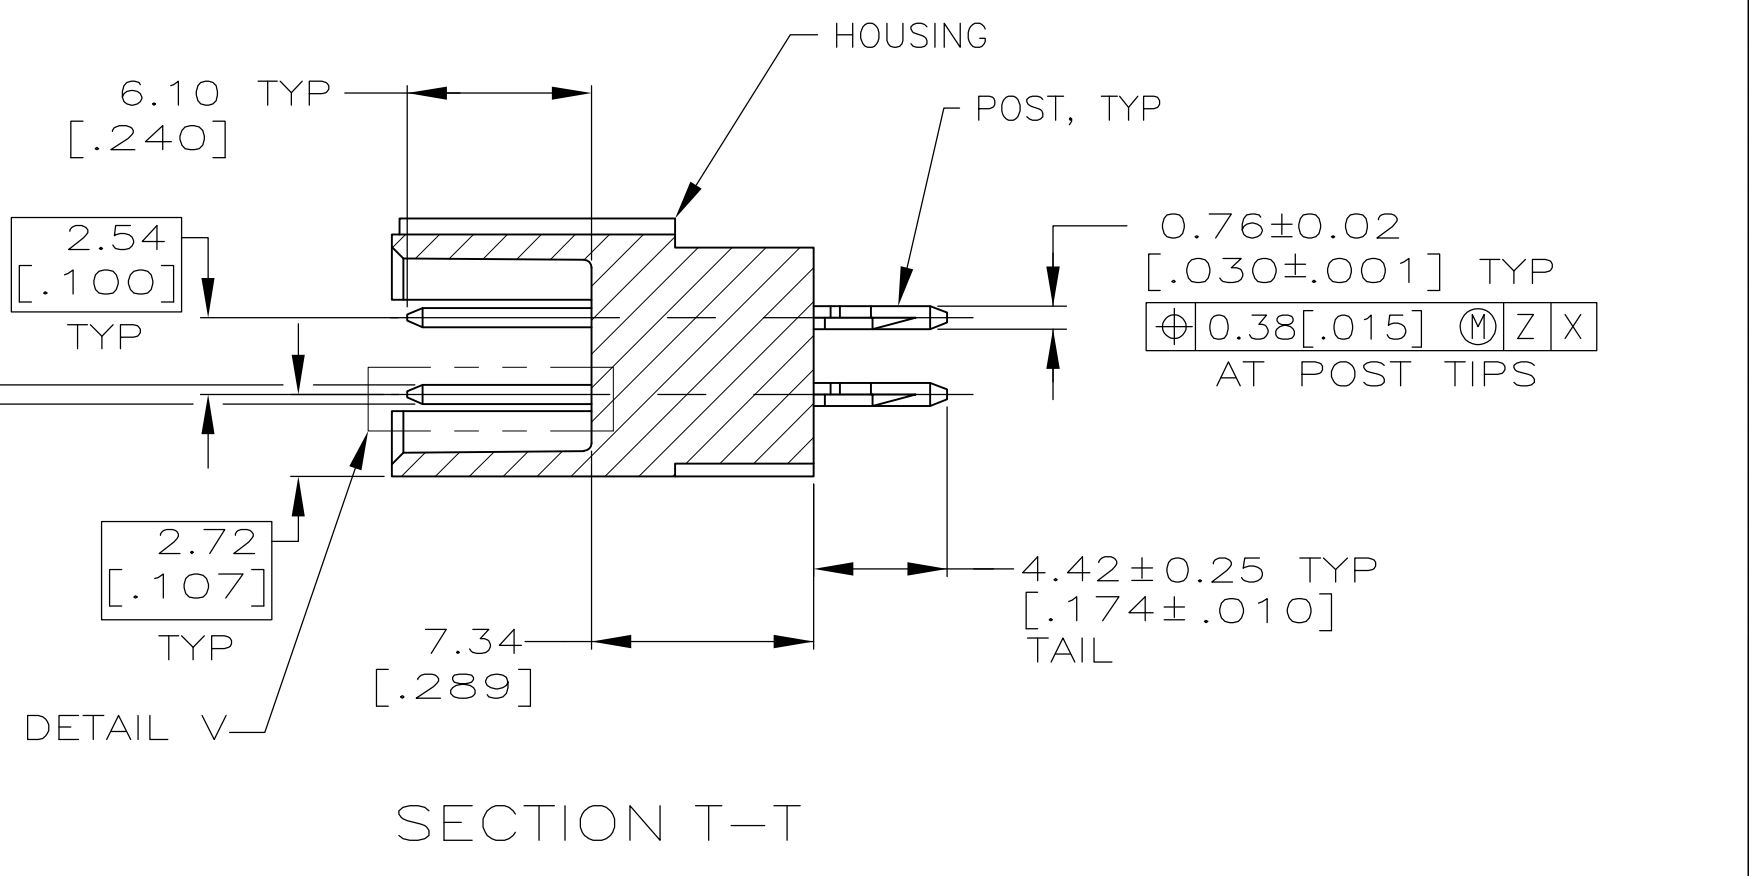

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE	02MAR2011	STE TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK S. BOLASH	02MAR2011		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. BOLASH	02MAR2011	NAME HEADER ASSEMBLY, UNIVERSAL, ACTION PIN, AMP-LATCH	
0 PLC ± -		PRODUCT SPEC		SIZE	
1 PLC ± -		108-40019		CAGE CODE	
2 PLC ± 0.13[.005]		APPLICATION SPEC		DRAWING NO	
3 PLC ± -		114-40020		RESTRICTED TO	
4 PLC ± -		WEIGHT		A1 00779	
ANGLES ± -		CUSTOMER DRAWING		SCALE 4:1	
FINISH		SHEET 1 OF 1		REV A	