

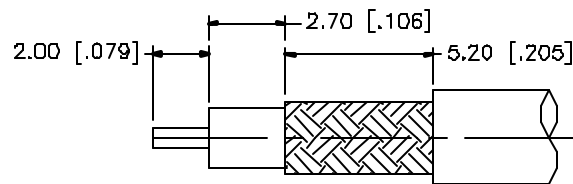
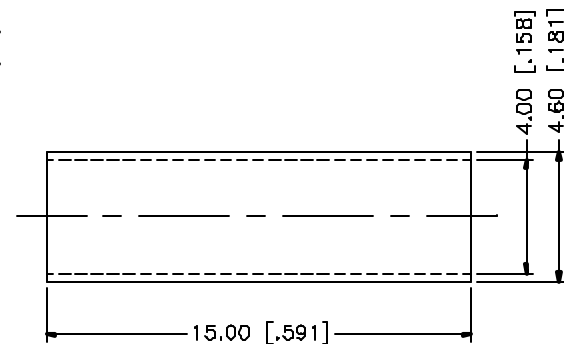



REV.	DATE	DESCRIPTION
A	01/14/04	UPDATE DRAWING FORMAT



RECOMMENDED
CABLE STRIPPING DIM'S

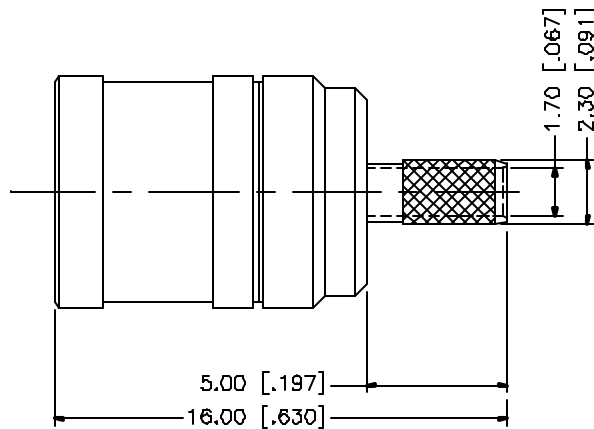

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE	Amphenol Connex				
8						DRAWN	G.R.S.	01/14/04					
7						CHECKED			PART DESCRIPTION SMB CRIMP PLUG (FOR RG-179/U, 187A/U)				
6						ISSUED							
5	HEAT SHRINK TUBE		BLACK	1		SHEET	1 OF 1		PART NO. 142103				
4	FERRULE	COPPER	GOLD	1									
3	CONTACT PIN	BER. COPPER	GOLD	1				DWG. NO. 142103.DWG					
2	INSULATOR	TEFLON	NATURAL	1									
1	BODY	BRASS	GOLD	1				REV. A	SIZE A	SCALE NA			
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/142/142103.DWG						