


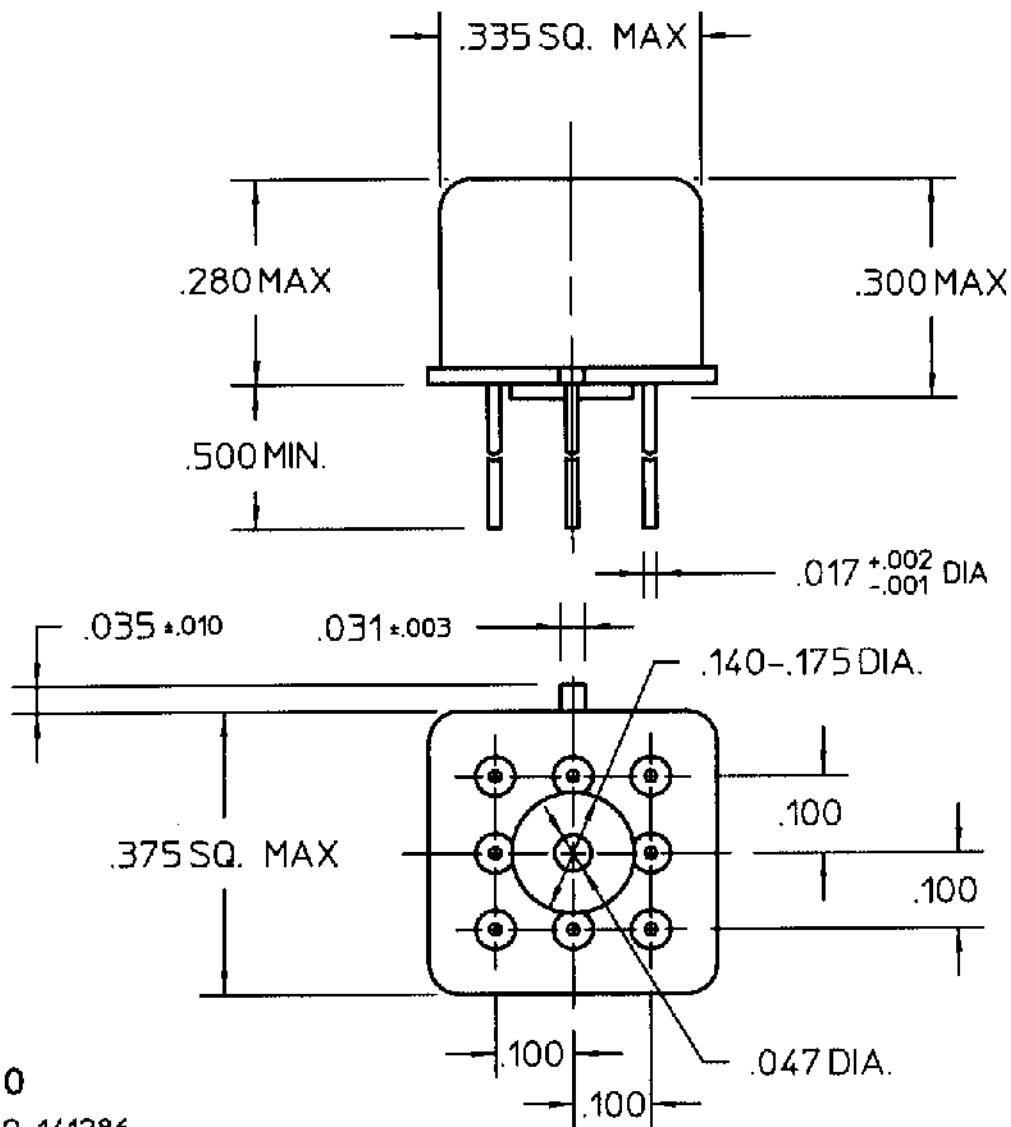

REV. 0

DCO 141286

COIL: @ 25°C  
 RESISTANCE \_\_\_\_\_ 50 OHMS ±10%  
 NOMINAL VOLTAGE \_\_\_\_\_ 5.0 VDC  
 MUST OPERATE \_\_\_\_\_ 2.7 VDC  
 \_\_\_\_\_  
 MUST RELEASE \_\_\_\_\_ 1.4 VDC MAX, 0.22 VDC MIN.

ENVIRONMENT:


VIBRATION \_\_\_\_\_ 10 \_\_\_\_\_ CPS TO \_\_\_\_\_ 3000 \_\_\_\_\_ CPS @ \_\_\_\_\_ 30 \_\_\_\_\_ g's  
 SHOCK \_\_\_\_\_ 75 \_\_\_\_\_ g's \_\_\_\_\_ 6 \_\_\_\_\_ MS. DURATION.  
 TEMPERATURE \_\_\_\_\_ -65 \_\_\_\_\_ °C TO \_\_\_\_\_ +125 \_\_\_\_\_ °C

NOTES: \_\_\_\_\_ OPERATE TIME 2.0 MS MAX

\_\_\_\_\_ RELEASE TIME 15 MS MAX

\_\_\_\_\_ CONTACT STABILIZATION 2.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP  
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. \_\_\_\_\_ B.D. 8/17/99 CK ~~copy~~ 8/17/99

**COMMUNICATIONS**  
**INSTRUMENTS, INC.**

CUST. \_\_\_\_\_ QPL  
 CUST. NO. M39016/17-037P REV. \_\_\_\_\_

JMGA RELAY

JMGAC-5PW