





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-910123~126	2009/01/08	Vicky	Update the drawing.
C	LEN-0A0050~53	2010/09/03	Zhang Xing	Change Dimension.

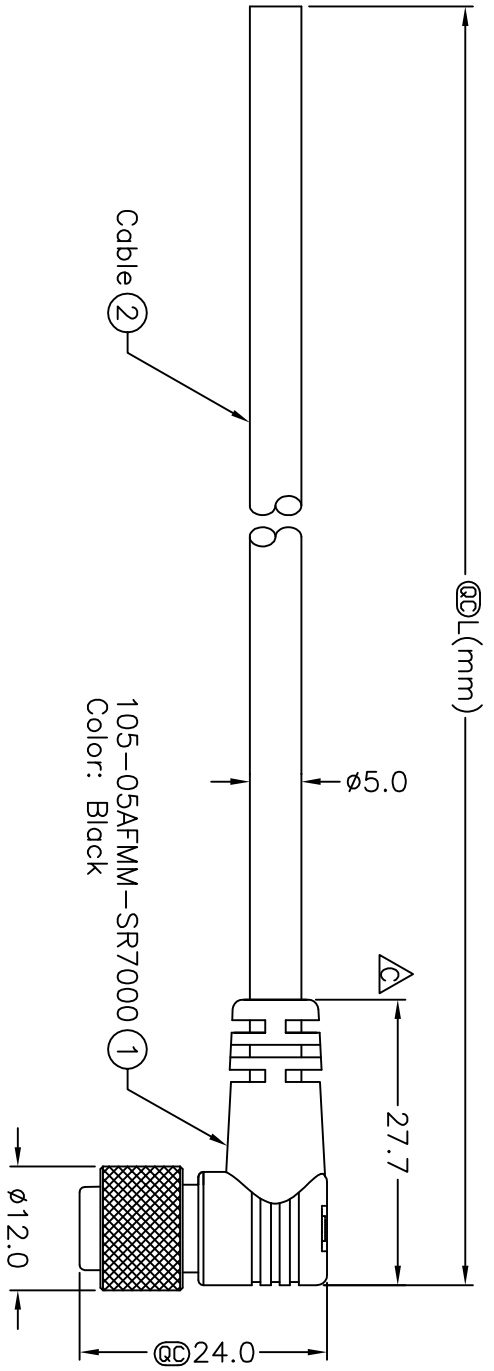


105-05AFMM-SR7AXX

XX:01~99Meters
01:01Meter
02:02Meters

Cable Length(L):01~99Meters

- Notes:
- * @ Important Dimension.
 - * Waterproof Rate:IP67.
 - * Connector:Nylon+GF,Black.
 - * Male Pin:Copper Alloy,Gold Plated.
 - * Cable:UL2464 24AWG*5C+Talc,Black, PVC Jacket,UV Resistant,OD=5.0mm.
 - * Cable Length Tolerance: 01M:±40mm 02M~05M:±60mm 06M~10M:±100mm 11M~30M:±200mm 31M~99M:±500mm



5	Yellow	黃
4	Orange	橘
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.		Wire Color

Pin Assignments
Front View

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
TOLERANCE		Cable Screw 5P F Conn M Pin		DWG NO		Zhang Xing		2010/09/03	
±0.5 mm		SCALE Free		105-05AFMM-SR7AXX		Tina		2010/09/03	
1		REV. C		SHEET 1 OF 1		APPROVED BY Can		2010/09/03	
2		SIZE A4		@ :inspection Item		8 FMW0702-01-01A2			
3									
4									
5									
6									
7									

Amphenol LTM

安費諾亮泰企業股份有限公司