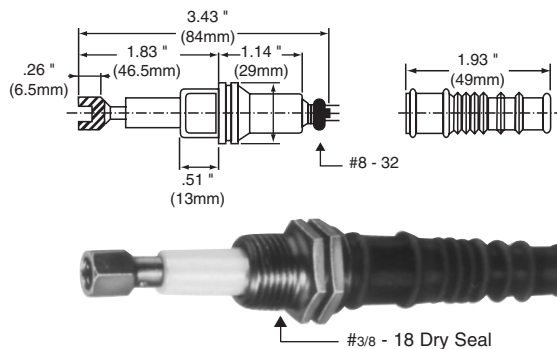


S5 LEVEL PROBE HOLDER

Single probe holder for use with probe rod of various lengths. This probe is particularly suitable for high temperature and/or high pressure applications. It is capable of operating at temperatures up to 200°C (392°F) and pressures up to 700PSI. Order part # S5.

3/6" Threaded Rod. Order part number S5/1.




NOTE: Internal Threading: 1/4 x 20

**S8 LEVEL PROBE**

The S8 probe will hold one, two or three 4mm probes. The S8 comes with three (3) one meter lengths of 4mm stainless steel rod. It comes equipped with a black SBS rubber protective top through which the leads are routed at a 90° angle.


SPECIFICATIONS:

| | |
|----------------------------|--|
| Material - Holder | Polyamide |
| Material - Top Boot | SBS (Styrene Butadiene) |
| Wire Terminal | Stainless Steel with M2 x 4 brass screws |
| Probe Holder | Stainless steel |
| Gasket | BB701 (Butadiene) |
| Thread Size | 1/2" NPT |
| Operating Temp | 176°F (80°C) |
| Max Pressure | 2 Kg/CM ² (28 PSI) |

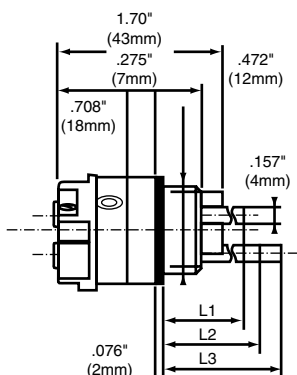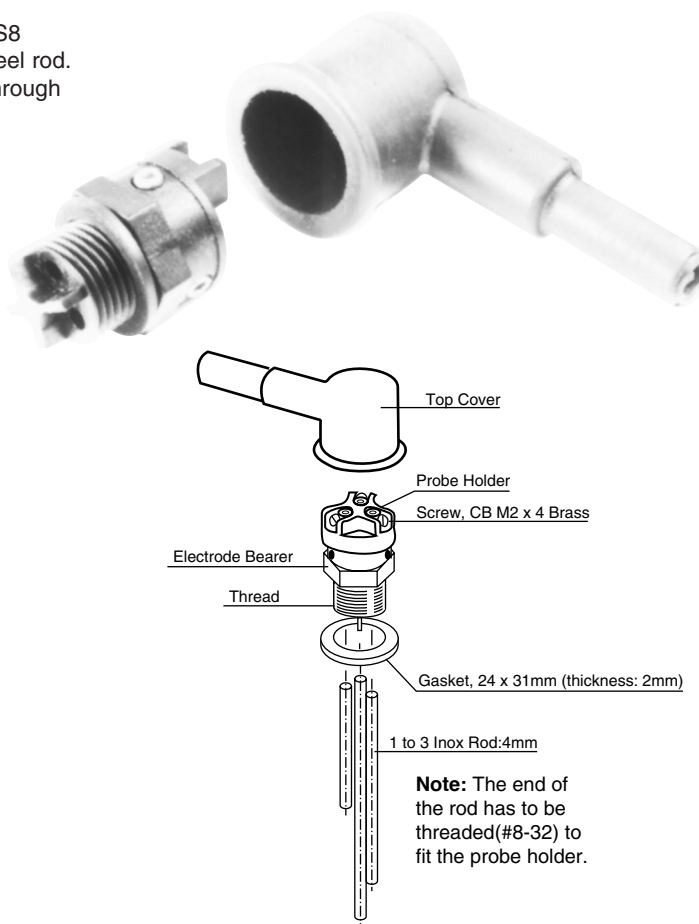


DR – DIN-RAIL


The DR-DIN-Rail material is an extruded aluminum material of the standard configuration, 35mm. Timers and Controls conveniently snap onto the track. Order part number "DR" which is available in 1 meter (39") lengths. Shown with S08, S11 and K11 sockets.

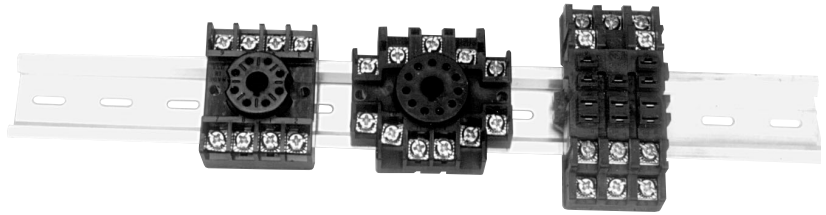**S08, S11 SCREW TERMINAL SOCKETS**

The S08, and S11 are 8 and 11 pin sockets fabricated from a rugged, durable polycarbonate.* Mounting is with two 6/32 screws .250 or on .30 DIN-Rail, DR. Order part "S08" or "S11."



S11



S08

S08-600: 600 V, 10 A rated 8 pin socket-UL and CSA

**L595 SERIES
CURRENT TRANSFORMER**


- 20 to 400 Amps
- Compatible with IAR.T Series

SPECIFICATIONS:

| | |
|-------------------------|-----------------------------|
| Input Current | 20 to 400 Amps AC 50/60 Hz |
| Output Current | 100 mA AC |
| Connections | #20 AWG 24" long wires |
| Insulation Class | 600 VAC |
| Enclosure | Fiberglass reinforced resin |

ORDERING INFORMATION:

| Part Number | Input Current |
|-------------|---------------|
| L595-020 | 20 Amps |
| L595-050 | 50 Amps |
| L595-100 | 100 Amps |
| L595-200 | 200 Amps |
| L595-300 | 300 Amps |
| L595-400 | 400 Amps |

DIMENSIONS:**L546 SERIES
CURRENT TRANSFORMER**


- 50 to 500 Amps
- Compatible with F3I and FWIT Series

SPECIFICATIONS:

| | |
|-------------------------|----------------------------|
| Input Current | 50 to 500 Amps AC 50/60 Hz |
| Output Current | 5 Amps AC |
| Connections | #16 AWG 24" long wires |
| Insulation Class | 600 VAC |
| Enclosure | Molded thermoplastic |

ORDERING INFORMATION:

| Part Number | Input Current |
|-------------|---------------|
| L546-050 | 50 Amps |
| L546-100 | 100 Amps |
| L546-200 | 200 Amps |
| L546-500 | 500 Amps |

DIMENSIONS:

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com