




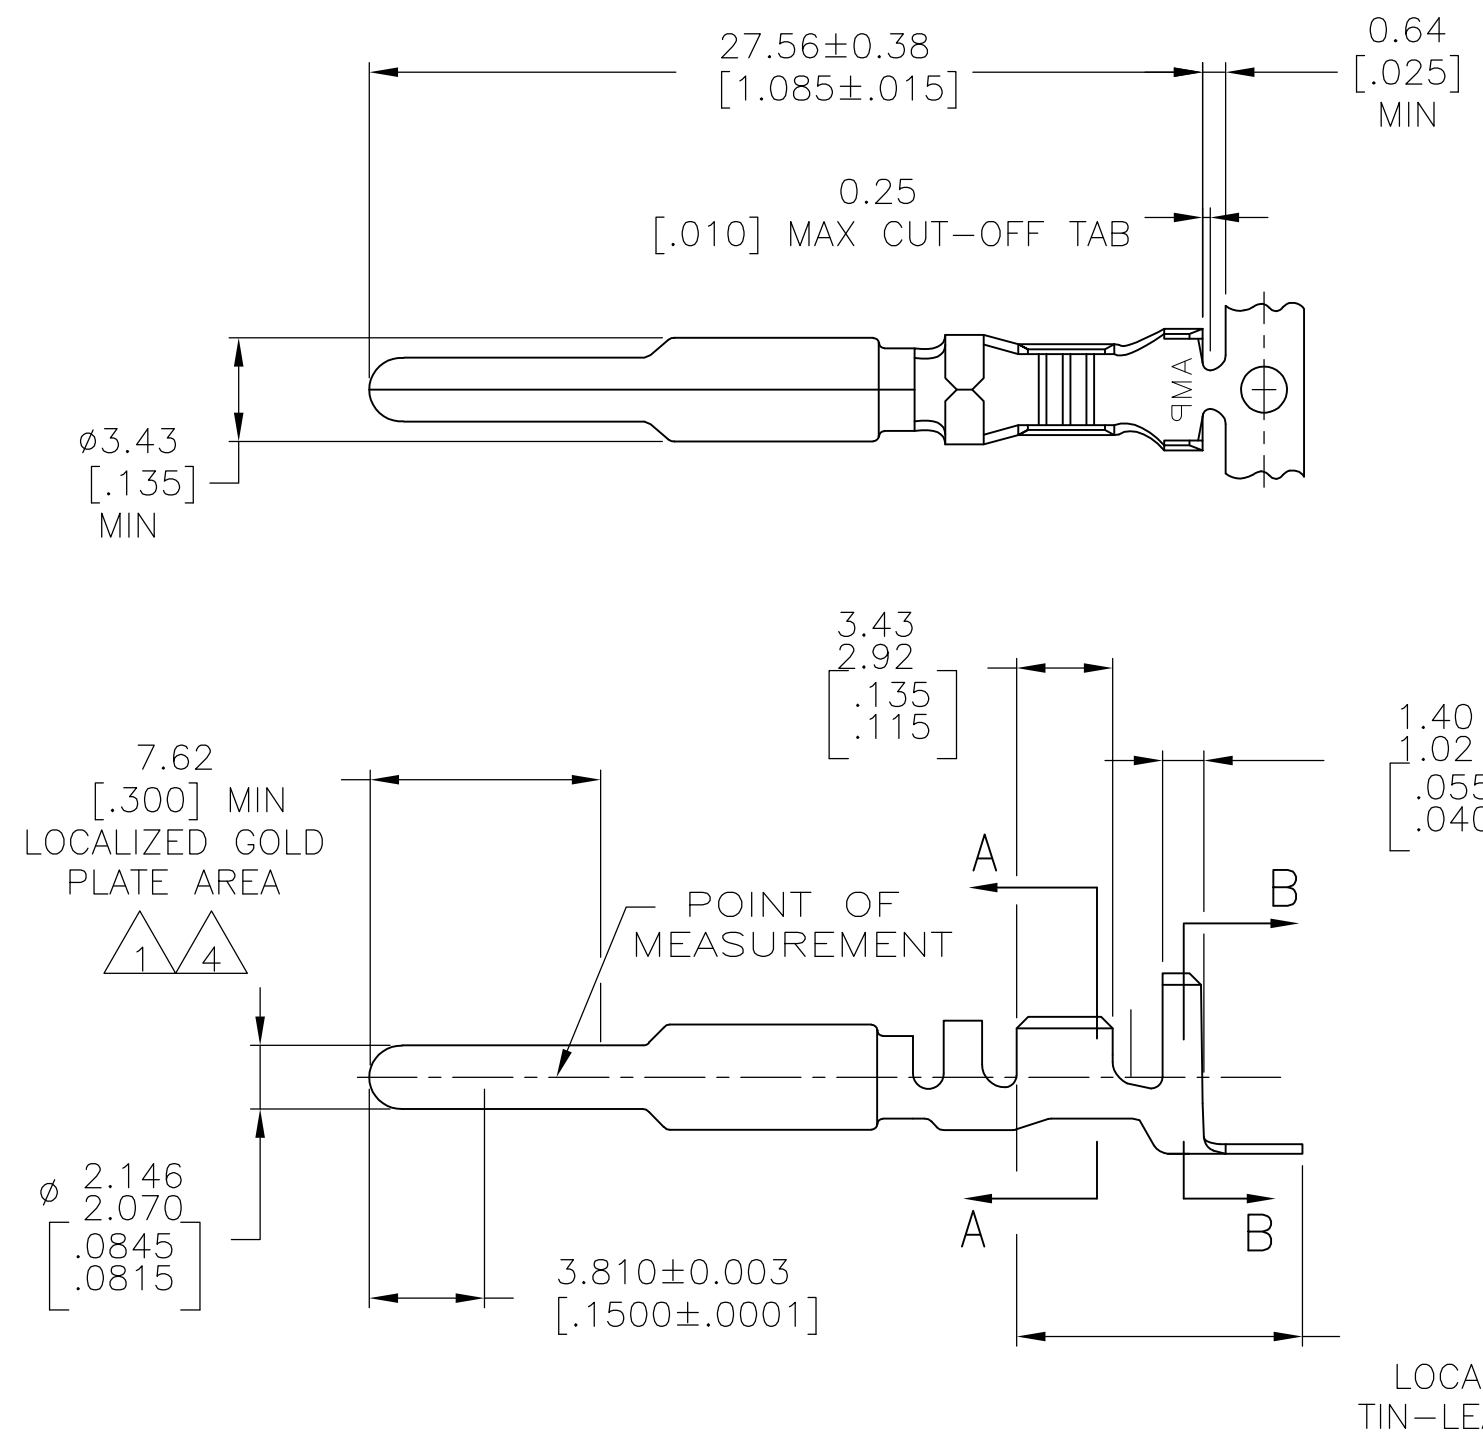

- 1 0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN-LEAD IN THE TIN-LEAD PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 2 WIRE RANGE: 0.5–2mm² [20–14] AWG. INSULATION RANGE: 3.30–5.08[.130–.200] DIA.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4 0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN IN TIN PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 5 SUPERSEDED BY 1-770194-0

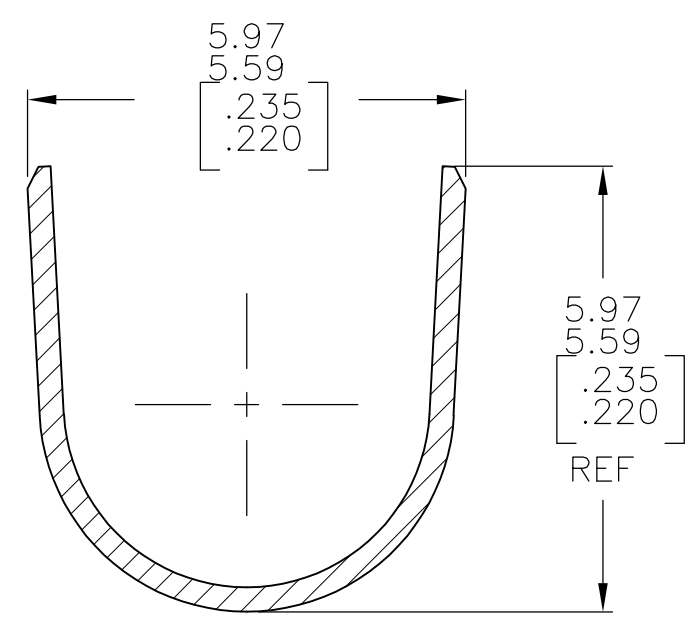

SECTION B-B
SCALE 10:1

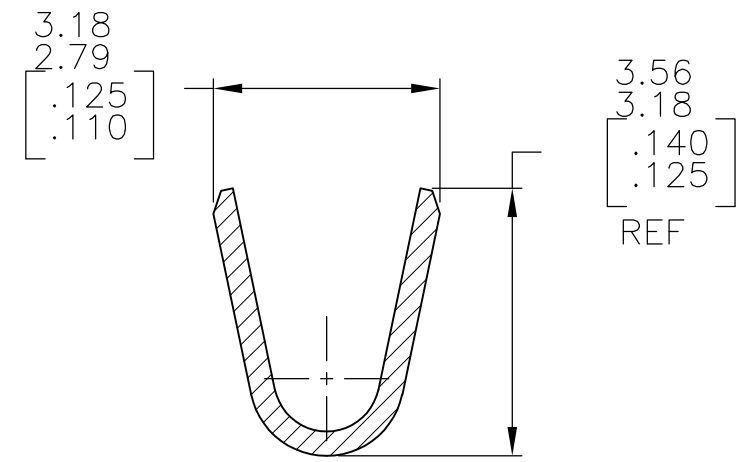

SECTION A-A
SCALE 10:1

5	GOLD	4	0.30	[.012]	BRASS	1-770194-0
	GOLD	1	0.30	[.012]	BRASS	770194-2
	PRE-TIN		0.30	[.012]	BRASS	770194-1
	FINISH		MATERIAL		PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL
SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

SEE TABLE

DWN
K. SALMON
CHK
R. SWING
APVD
M. TRULL
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
-
CUSTOMER DRAWING

22DEC92
22DEC92
01APR93

TE Connectivity

NAME
PIN, GROUNDING,
UNIVERSAL MATE-N-LOK(TM) II

SIZE
A2

CAGE CODE
00779

DRAWING NO
770194

RESTRICTED TO
-

SCALE
4:1

SHEET
1 OF 1

REV
K