
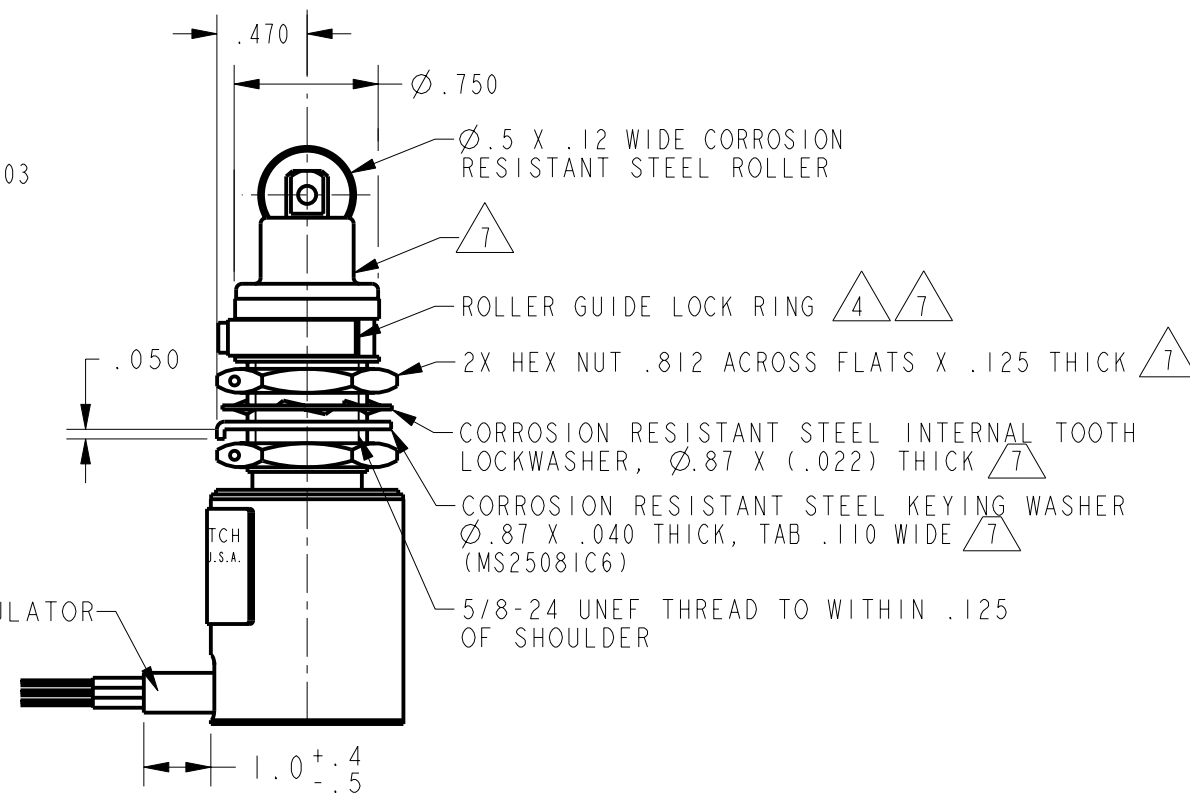
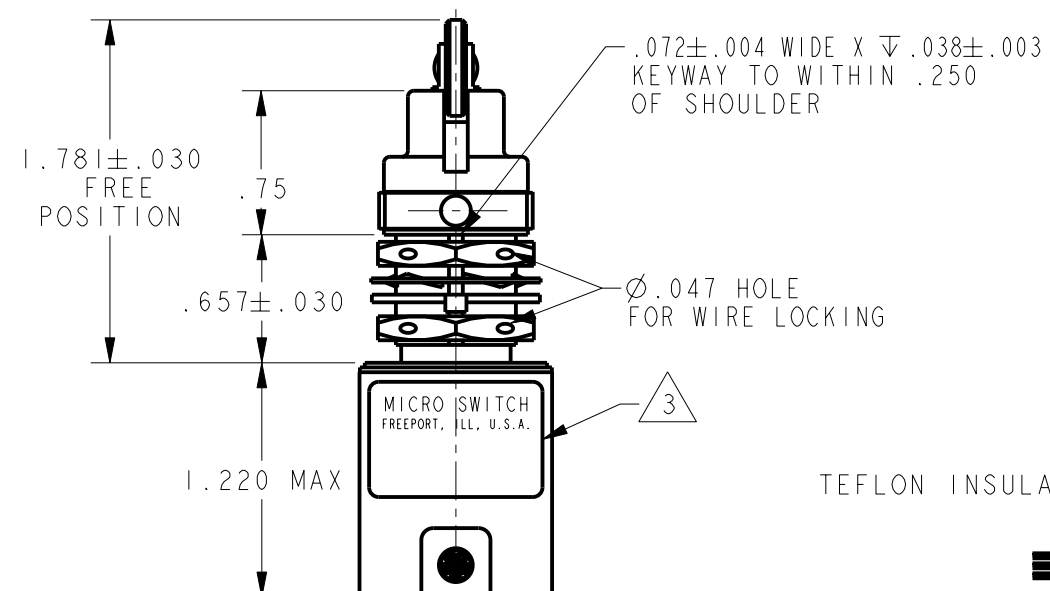
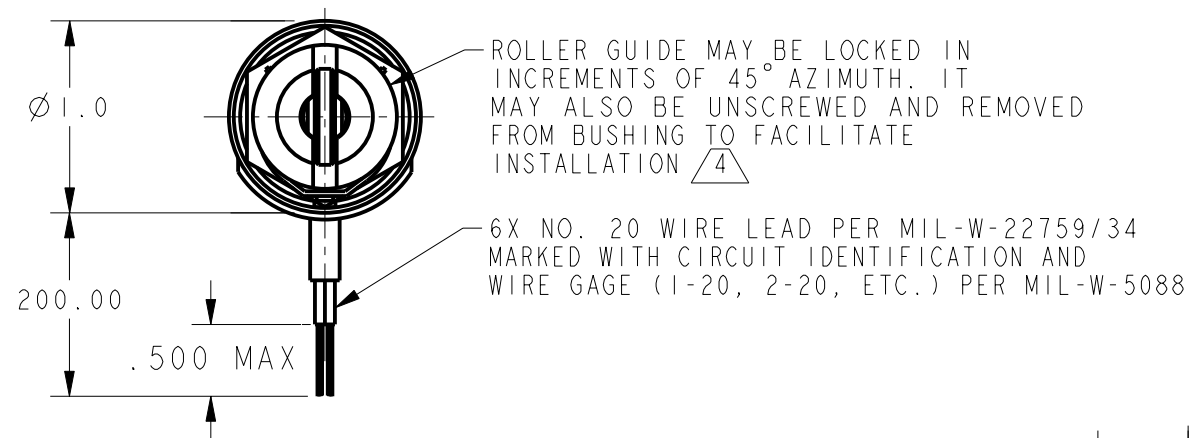


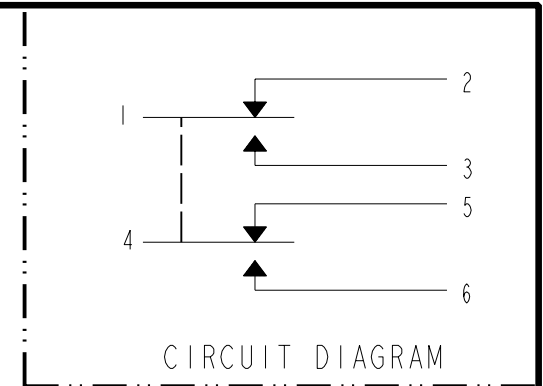


NOTES

- 1 - CORROSIVE RESISTANT STEEL ENCLOSURE
- 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 5
- 3 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
- 4 - TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING
- 5 - COINCIDENCE OF OPERATING AND RELEASING POINTS:
.010 INCH OF PLUNGER TRAVEL
- 6 - FOR OPERATION IN TEMPERATURES OF -65° TO $+257^{\circ}$
- 7 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



SCALE	FULL
-------	------

CHARACTERISTICS

OPERATING FORCE	— — — — —	6-12 LB
FULL OVERTRAVEL FORCE	— — — —	30 LB MAX
RELEASE FORCE	— — — — —	4 LB MIN
PRETRAVEL	— — — — —	.040 MAX
DIFFERENTIAL TRAVEL	— — — — —	.020 MAX
OVERTRAVEL	— — — — —	.250 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
2X S P D T

--	--

28 VDC

100,000 FT.

RES

5

IND

3

MOTC

4

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE

TWO PLACE

THREE PLAC

ANGLES

WEIGHT	12 07 MAX
--------	-----------