

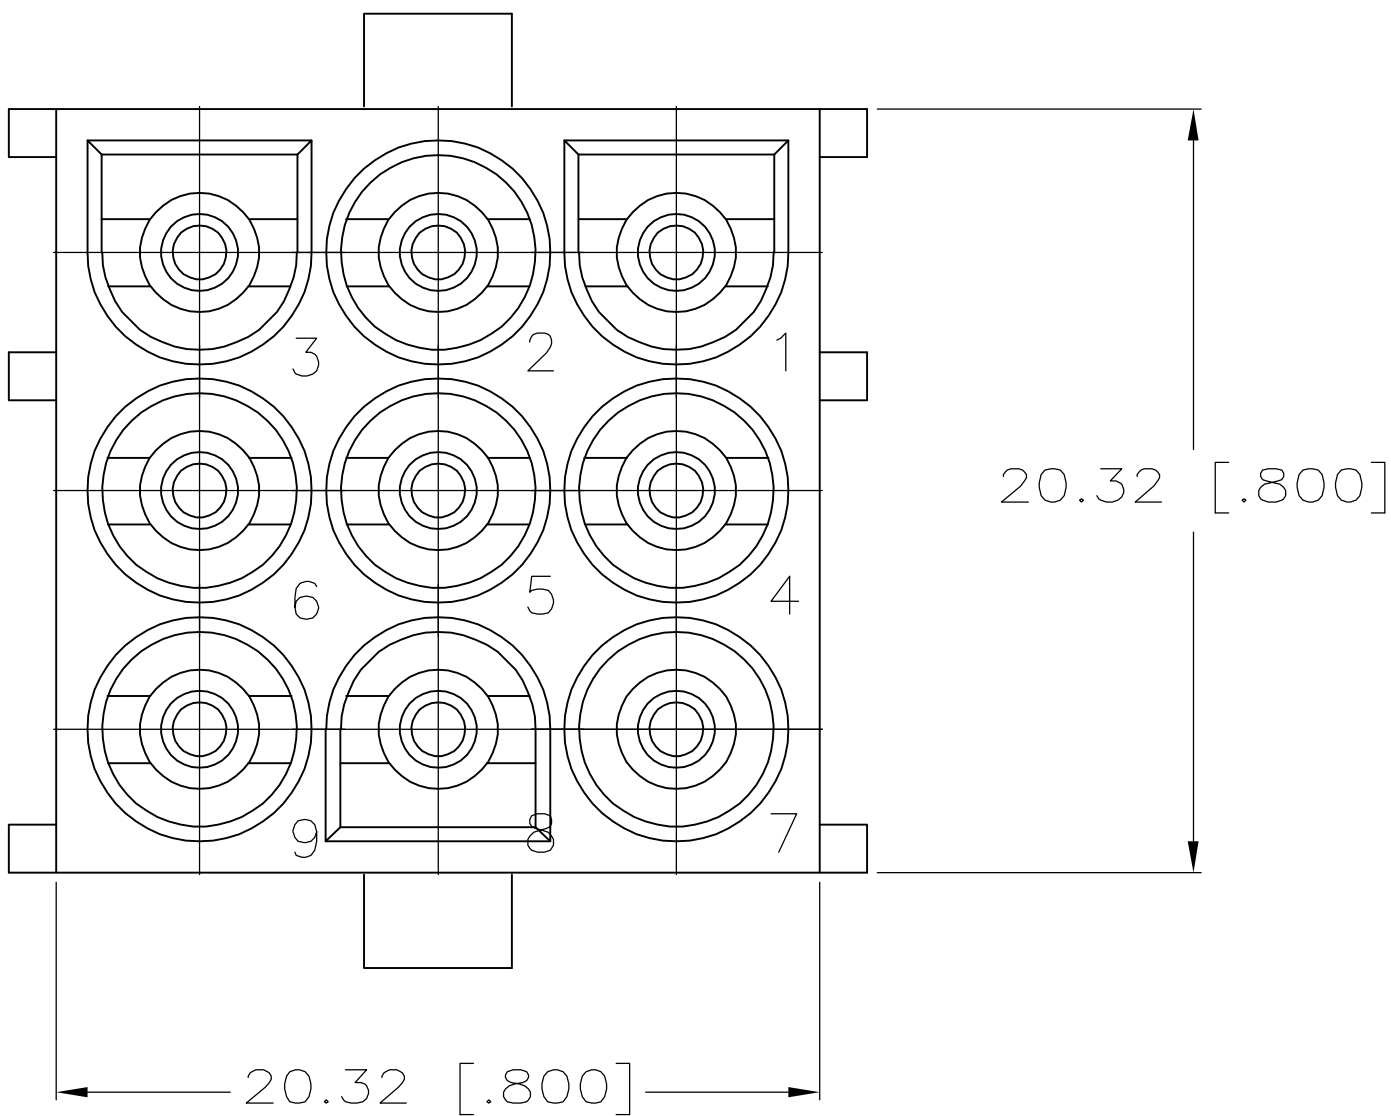
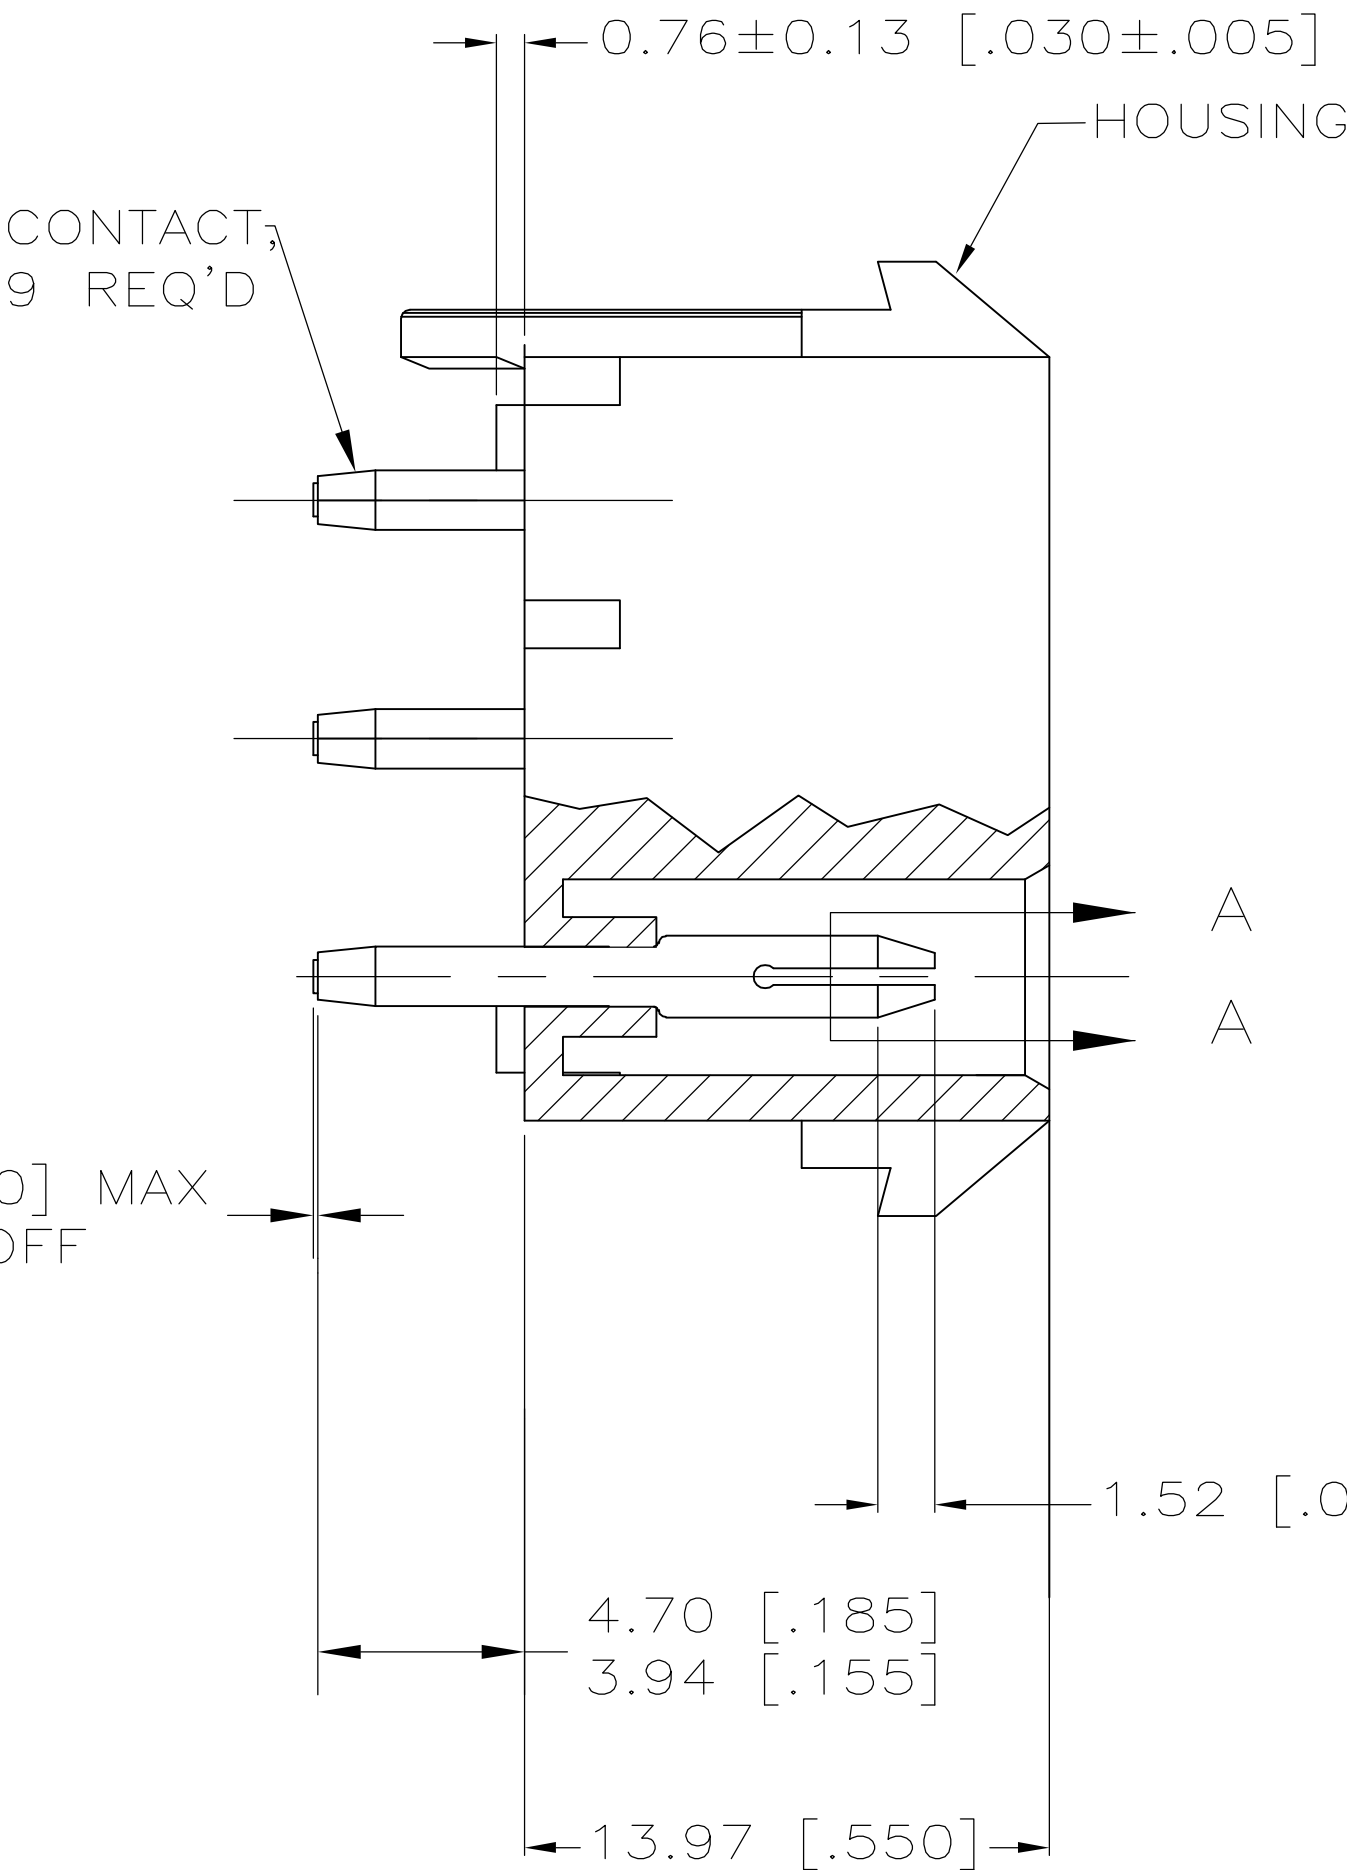



LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			M	REVISED PER 0G3B-1208-04	14OCT05	KW	SR

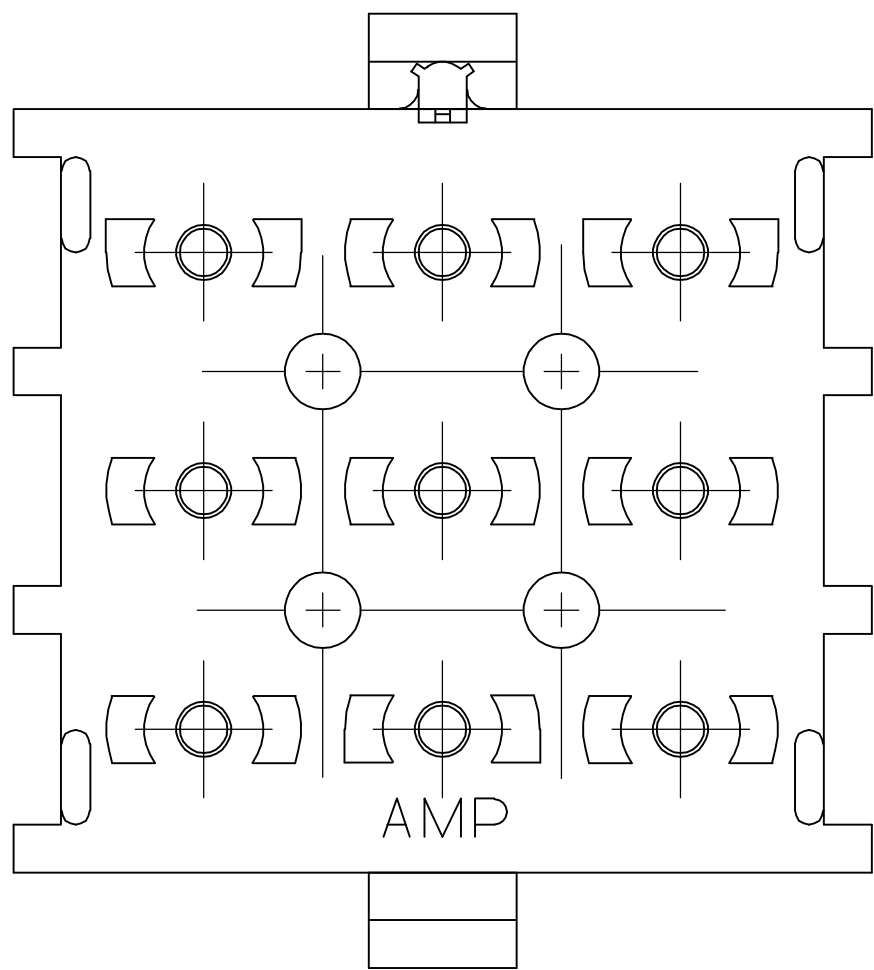


- PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
- CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN STRIPED WITH 0.00076 [.000030] GOLD IN CONTACT AREA INDICATED AND TIN-LEAD ON SOLDER TAIL END.
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

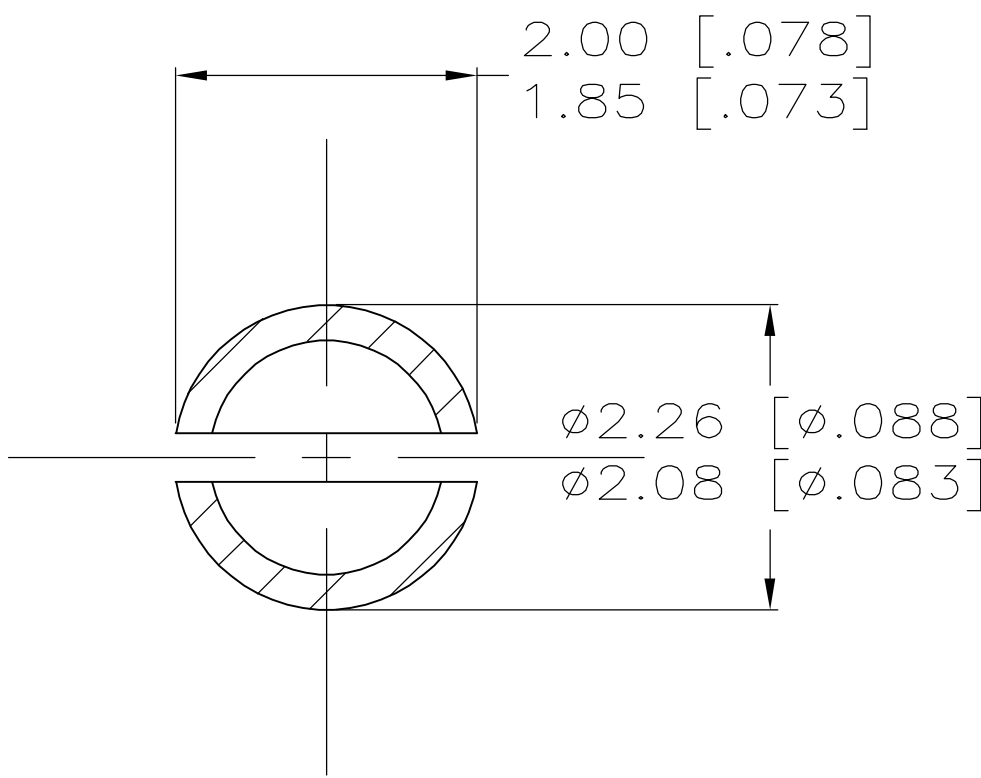


SECTION A-A
SCALE 12:1

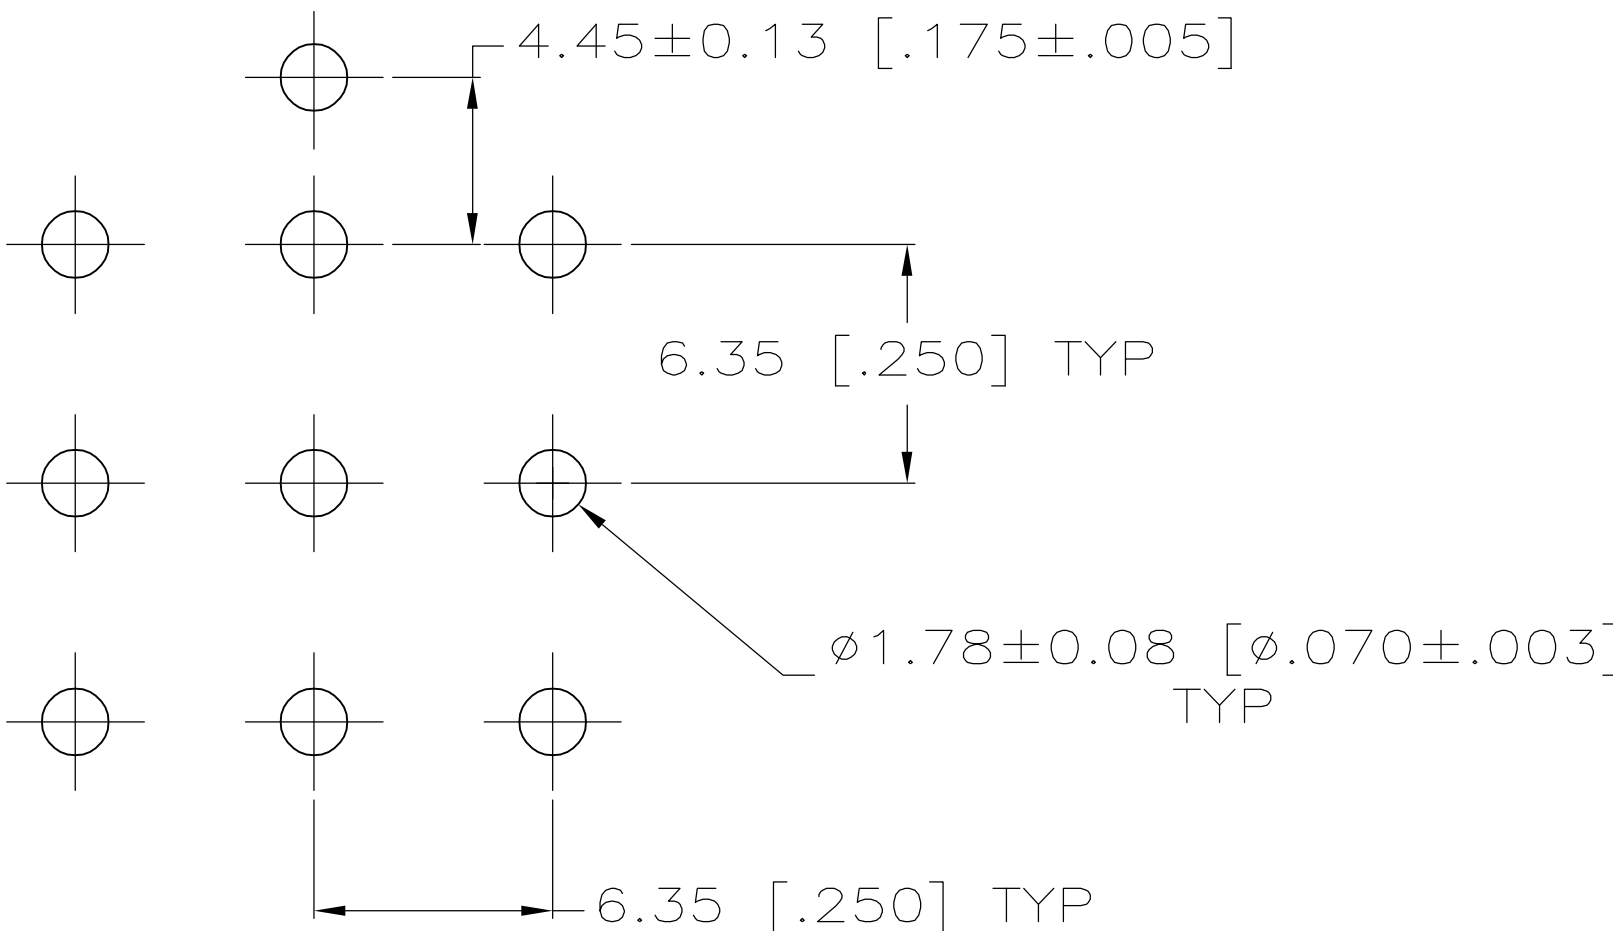

RECOMMENDED LAYOUT FOR 1.58 [.062] THICK PC BOARD



PH BRZ GOLD 		NYLON, UL94V-2	641971-3
PH BRZ GOLD 		NYLON, UL94V-2	641971-2
PH BRZ TIN		NYLON, UL94V-2	641971-1
CONTACT		HOUSING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 14OCT2005	 Tyco Electronics Corporation Harrisburg, PA 17105-3608
		CHK S. RIDGILL 14OCT2005	
		APVD S. RIDGILL 14OCT2005	
		PRODUCT SPEC	
		APPLICATION SPEC	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME	
	0 PLC ±	HEADER ASSEMBLY, PIN, POLARIZED, UNIVERSAL MATE-N-LOK(TM), 9 CIRCUIT	
	1 PLC ±		
	2 PLC ±		
	3 PLC ± 0.13 [.005]		
	4 PLC ±		
MATERIAL SEE CHART	ANGLES ±	SIZE CAGE CODE DRAWING NO	
	FINISH	RESTRICTED TO	
		A1 00779 ©=641971	
		CUSTOMER DRAWING	
		SCALE 5:1 SHEET 1 OF 1 REV M	