


# CES-B24-SFFS-PLBK

Order No.: 0801658

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=0801658>Sealing frame with screw locking, size B24, with flat gasket, for 10  
small sleeves**Commercial data**

EAN	 4 046356 674140
sales group	B240
Pack	1 Pcs.
Customs tariff	85472000
Gross weight in pieces	0.1777 KG
Net weight per piece	0.1777 KG

**Product notes**WEEE/RoHS-compliant since:  
06/27/2011

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Material	PA
Inflammability class according to UL 94	V0
Color	black
Length	147 mm
Degree of protection	IP55

Ambient temperature (operation)	-40 °C ... 120 °C
Torque	2 Nm ... 4 Nm (Locking screw)
Installation instructions	M5 locking screw with 4 mm Allen screw head, 2 ... 4 Nm torque, one large sleeve requires the space of 4 small sleeves.

**Certificates / Approvals**


Certification  
 Certifications applied for:  
 Certification Ex:

**Accessories**


Item	Designation	Description
<b>General</b>		
0801727	CES-B24-WRG-BK	Flat gasket made of NBR, size B24
0801728	CES-SFFS-H	M4 replacement screw with 4 mm Allen screw head for sealing frame with screw locking
1212647	SF-BIT-HEX 3-50	Screw bit, hexagon, E6.3-1/4" drive, size: Hex 3 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173
<b>Tools</b>		
1212070	SF-M BH	Bit screwdriver, with 1/4" quick-action chuck, handle length 119 mm, 2-component handle, with non-slip grip, suitable for bits according to DIN 3126-C 6.3 and E 6.3/ISO 1173, magnetic

**Drawings**

Dimensioned drawing

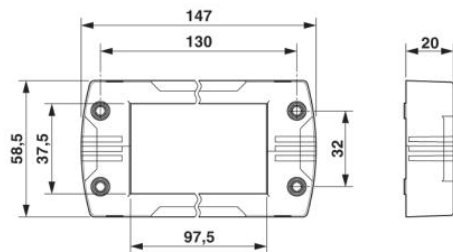

Dimensional drawing

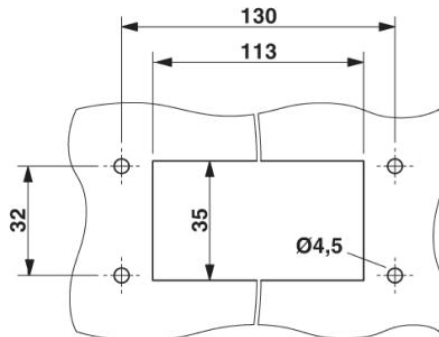

Panel cutout

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2012 Phoenix Contact  
Technical modifications reserved;