




1	2	3	4	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			




⑤ Sealing Nut




④ Seals B2







③ Clamp Ring



② Seals B1



① Housing

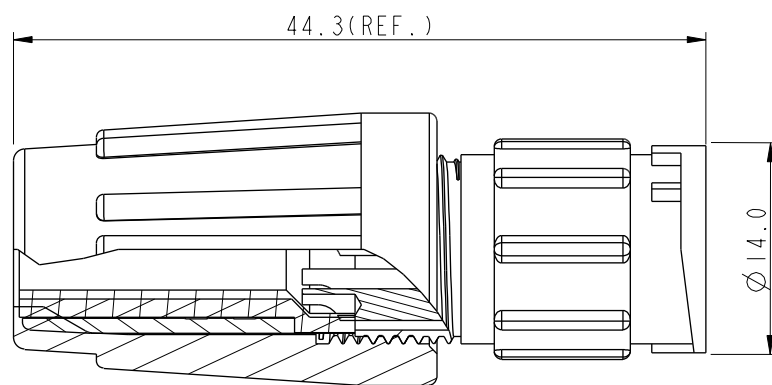With Liquid Glue
點防水膠Pin Assignments
Front View 前視圖

Note:

- * Seals B1 for Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
(防水墊圈B1線徑: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$)
- * Seals B2 for Cable OD: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$
(防水墊圈B2線徑: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$)
- * One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)
- * Important Dimension.
- * Waterproof Rate : IP66
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Seals: Black, EPDM
- * Clamping Ring: Black, Nylon
- * Sealing Nut: Black, Nylon
- * PE Bag: 90mm*85mm
- * Liquid Glue: Clear

UNIT: mm				TITLE		ITEM NO.	DRAWN BY	DATE
TOLERANCE		SCALE		SIZE		DWG NO.	CHECKED BY	DATE
.X ± 0.25		1:1		A4		BD-07BMMA-LL6001	SamChang	2012-03-27
.XX ± 0.1		REV.		WC-REV.		BD-07BMMA-LL6001	Jeffrey	2012-04-05
.XXX ± 0.05		A		A.2		CUSTOMER	APPROVED BY	DATE
ANGLES $\pm 1^\circ$		QC: Inspection item		ALTW			Lion	2012-04-05

Amphenol LTW
安費諾亮泰企業股份有限公司