


LOC		DIST		REVISIONS			
CM		53		REV	DESCRIPTION	DATE	DWN
				AB6	REVISED PER ECR-17-006277	24MAY2017	BW

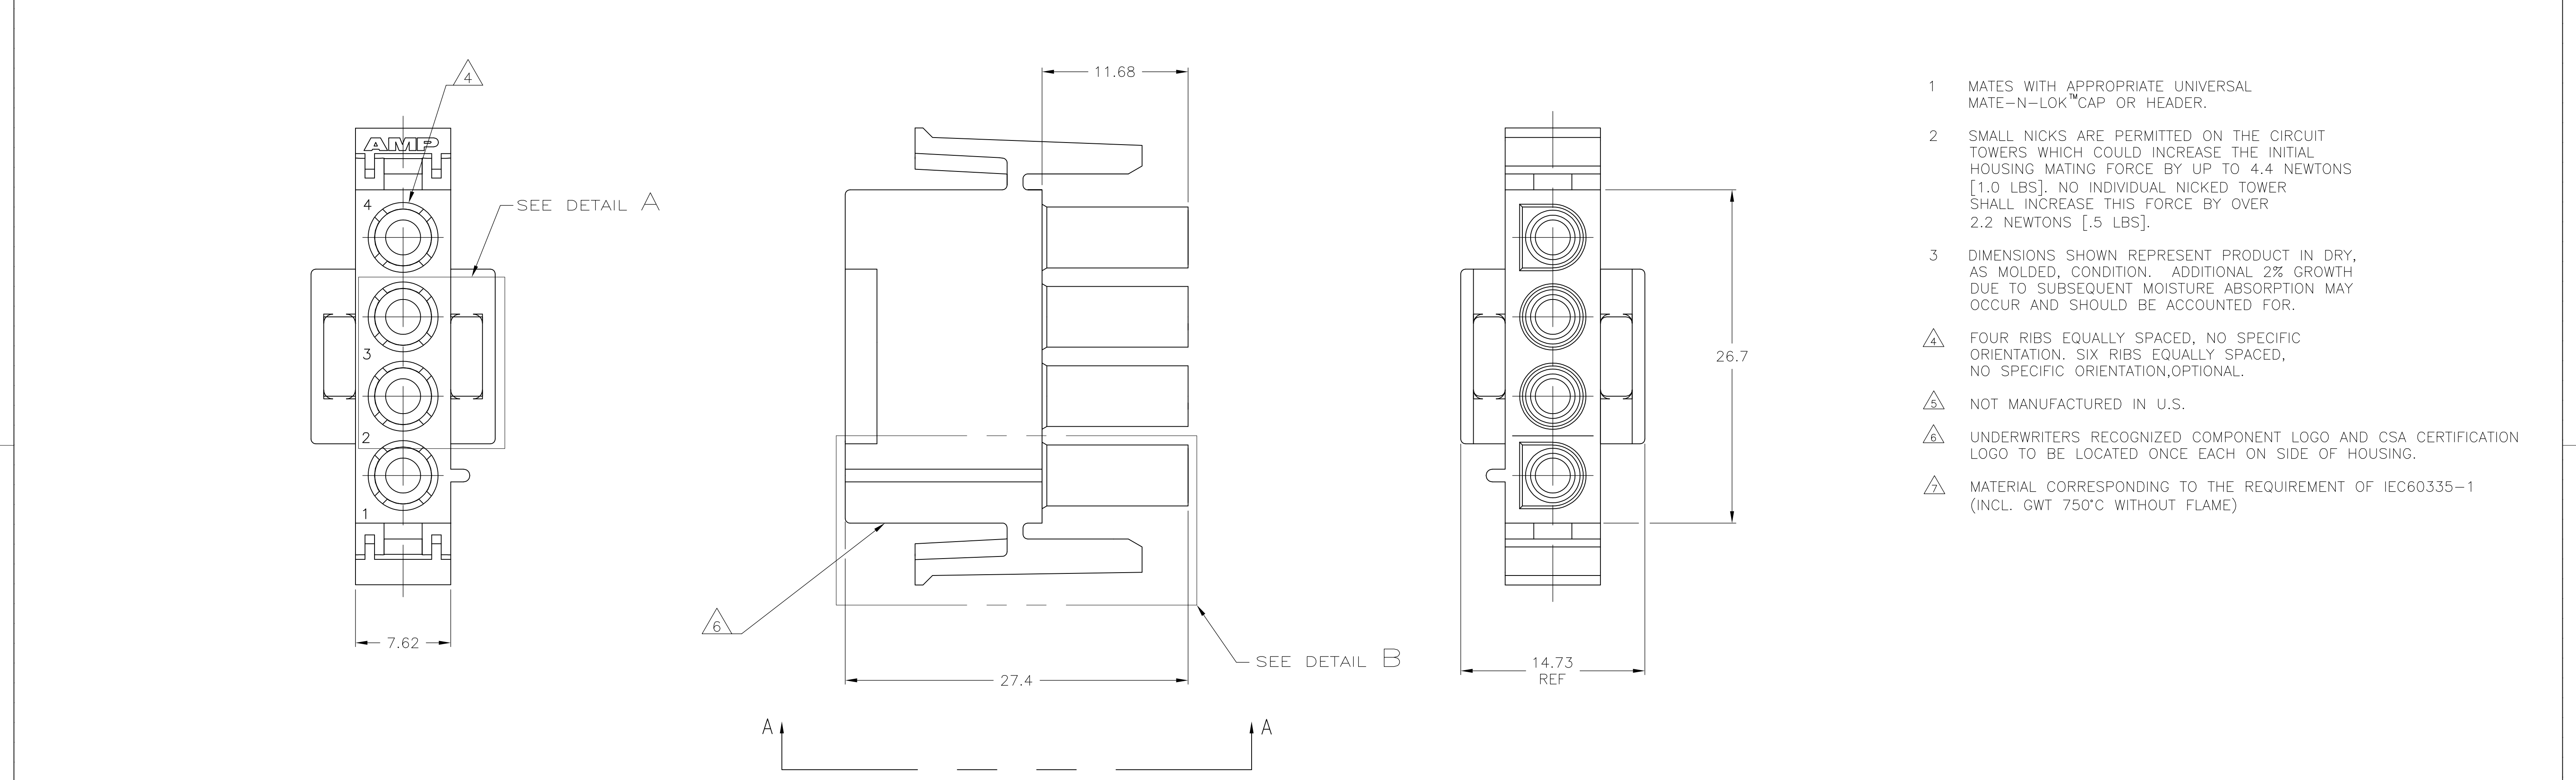

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™CAP OR HEADER.
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
 - DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- △4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION,OPTIONAL.
- △5 NOT MANUFACTURED IN U.S.
- △6 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- △7 MATERIAL CORRESPONDING TO THE REQUIREMENT OF IEC60335-1 (INCL. GWT 750°C WITHOUT FLAME)

350779-4 3-DIMENSIONAL MODEL NTS

3-DIMENSIONAL MODEL NTS

△ NATURAL	350779-5
BLACK	1-350779-9
GRAY	1-350779-8
BLUE	1-350779-6
GREEN	1-350779-5
YELLOW	1-350779-4
ORANGE	1-350779-3
RED	1-350779-2
BROWN	1-350779-1
△	350779-4
NATURAL	350779-1
COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.4
2 PLC ± 0.20
3 PLC ± -
4 PLC ± -
ANGLES ± ± 0°30'

MATERIAL

NYLON,UL 94V-0

FINISH

-

DWN

R. VESTAL

03FEB95

CHK

R. SWING

03FEB95

APPROVED

D. SELF

03FEB95

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

NAME

PLUG, 4 CIRCUIT, UNIVERSAL MATE-N-LOK™

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A1

00779

350779

-

CUSTOMER DRAWING

SCALE 4:1

SHEET 1 OF 1

REV AB6

STE

TE Connectivity