


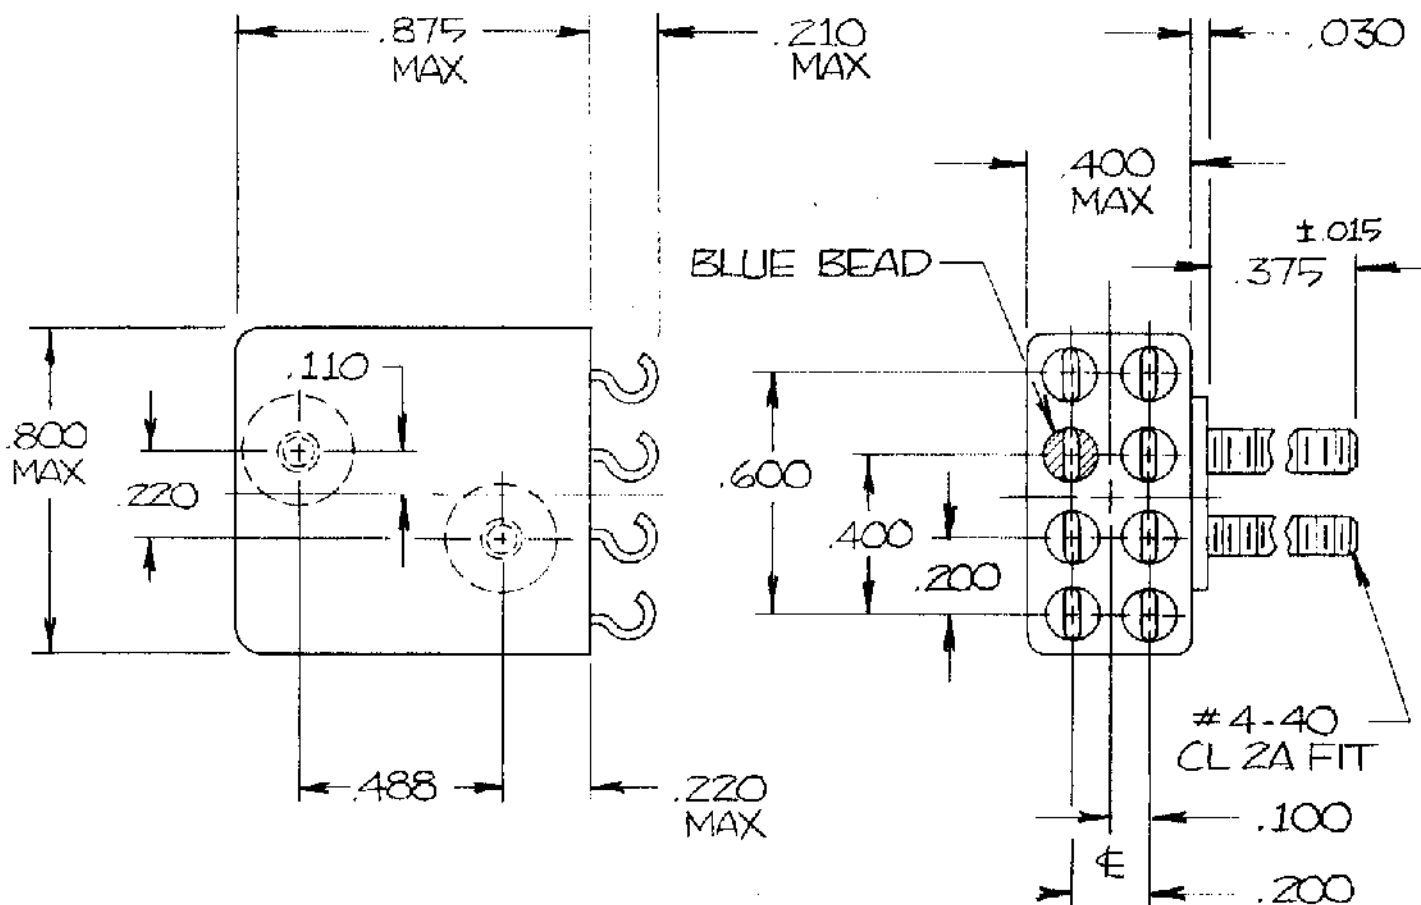

COIL:


RESISTANCE 675 Ω $\pm$ 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 2.3 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS.DURATION
 TEMPERATURE -65° °C TO +125° °C

NOTES:

CUSTOMER DATA SHEET

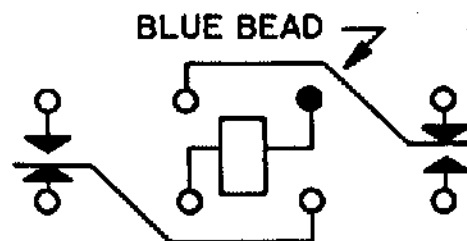

CONTACT RATING: 2A 28 VDC
 RESISTIVE 100,000 OPERATIONS

DR. R.B. 1-18-90 CK. 1/8/90



Communications
Instruments, Inc.

CUST. QPL
 CUST. NO. M5757/10-015

TYPE "FW" RELAY

FW1167G03