

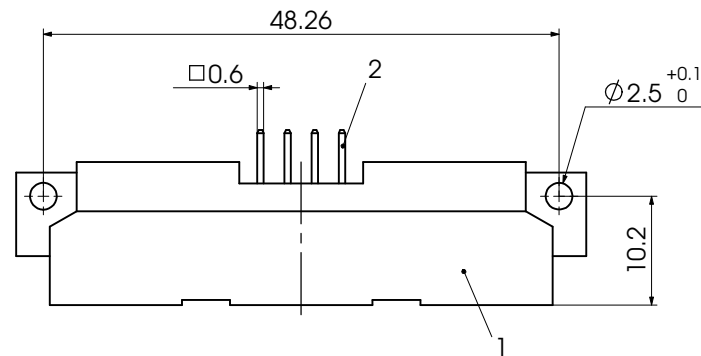

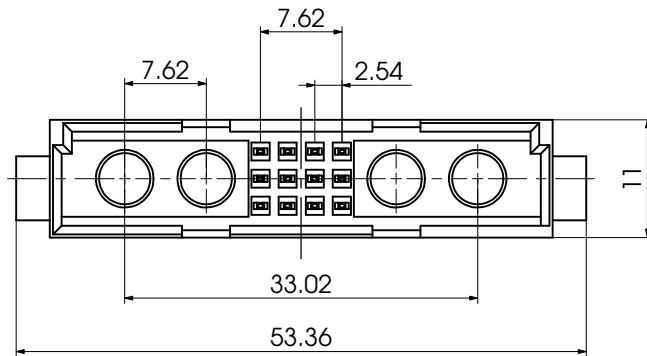


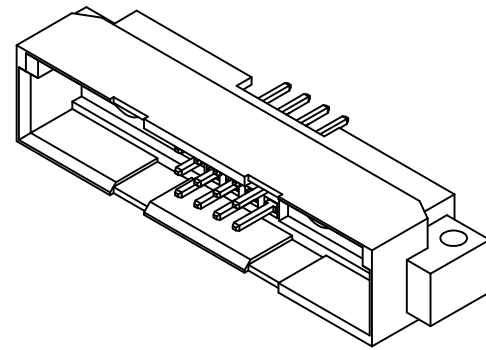

Rear View of the Male Connector

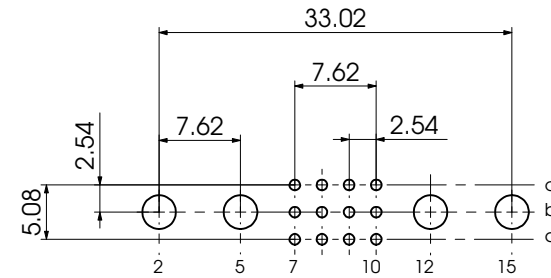

② xx for performance classes 10, 20 or 30
(contact cycle for 10/20/30 = 500/400/50)

② ①	2	12	Signal contact	Cu alloy	500/400/50	
	1	1	Insulator	Polyester, UL94V-0	grey	
	No.	St.	Part	Type Description/Material	Surface plating/Colour/Class	
				Measurement without tolerance acc. to ISO 2768-m	SCALE 2:1	TITLE Connector according to EN 60603-2
				NAME / DATE		
			DRAWN	ADenzinger 16-11-2006		
			CHECKED	ffloßmann 12-02-2007		
						DWG.NO. 2712401xx
			fctgroup.com			
	2	09-02-2007	21944			REV. 2
	1	16-11-2006	21921			
	REV.	DATE	CH.-NO.	ORIGINAL: DIN A3-DRAWING AS A FILE	REPLACEMENT FOR: 2712401xx a	PAGES 1