

Bemerkung:

- 1

Zu verwendete Junior Power Timer Kontakte
(USED JUNIOR POWER TIMER CONTACTS)


0.5 — 1.0mm² AMP-Nr. 929 939 oder 927 770

>1.0 — 2.5mm² AMP-Nr. 929 937 oder 927 766
- 2



Zu verwendete Einzeladerabdichtung
(USED SCAT SEAL)

Isol. Ø 1.2 — 2.1 AMP-Nr. 828 904

Isol. Ø 2.2 — 3.0 AMP-Nr. 828 905

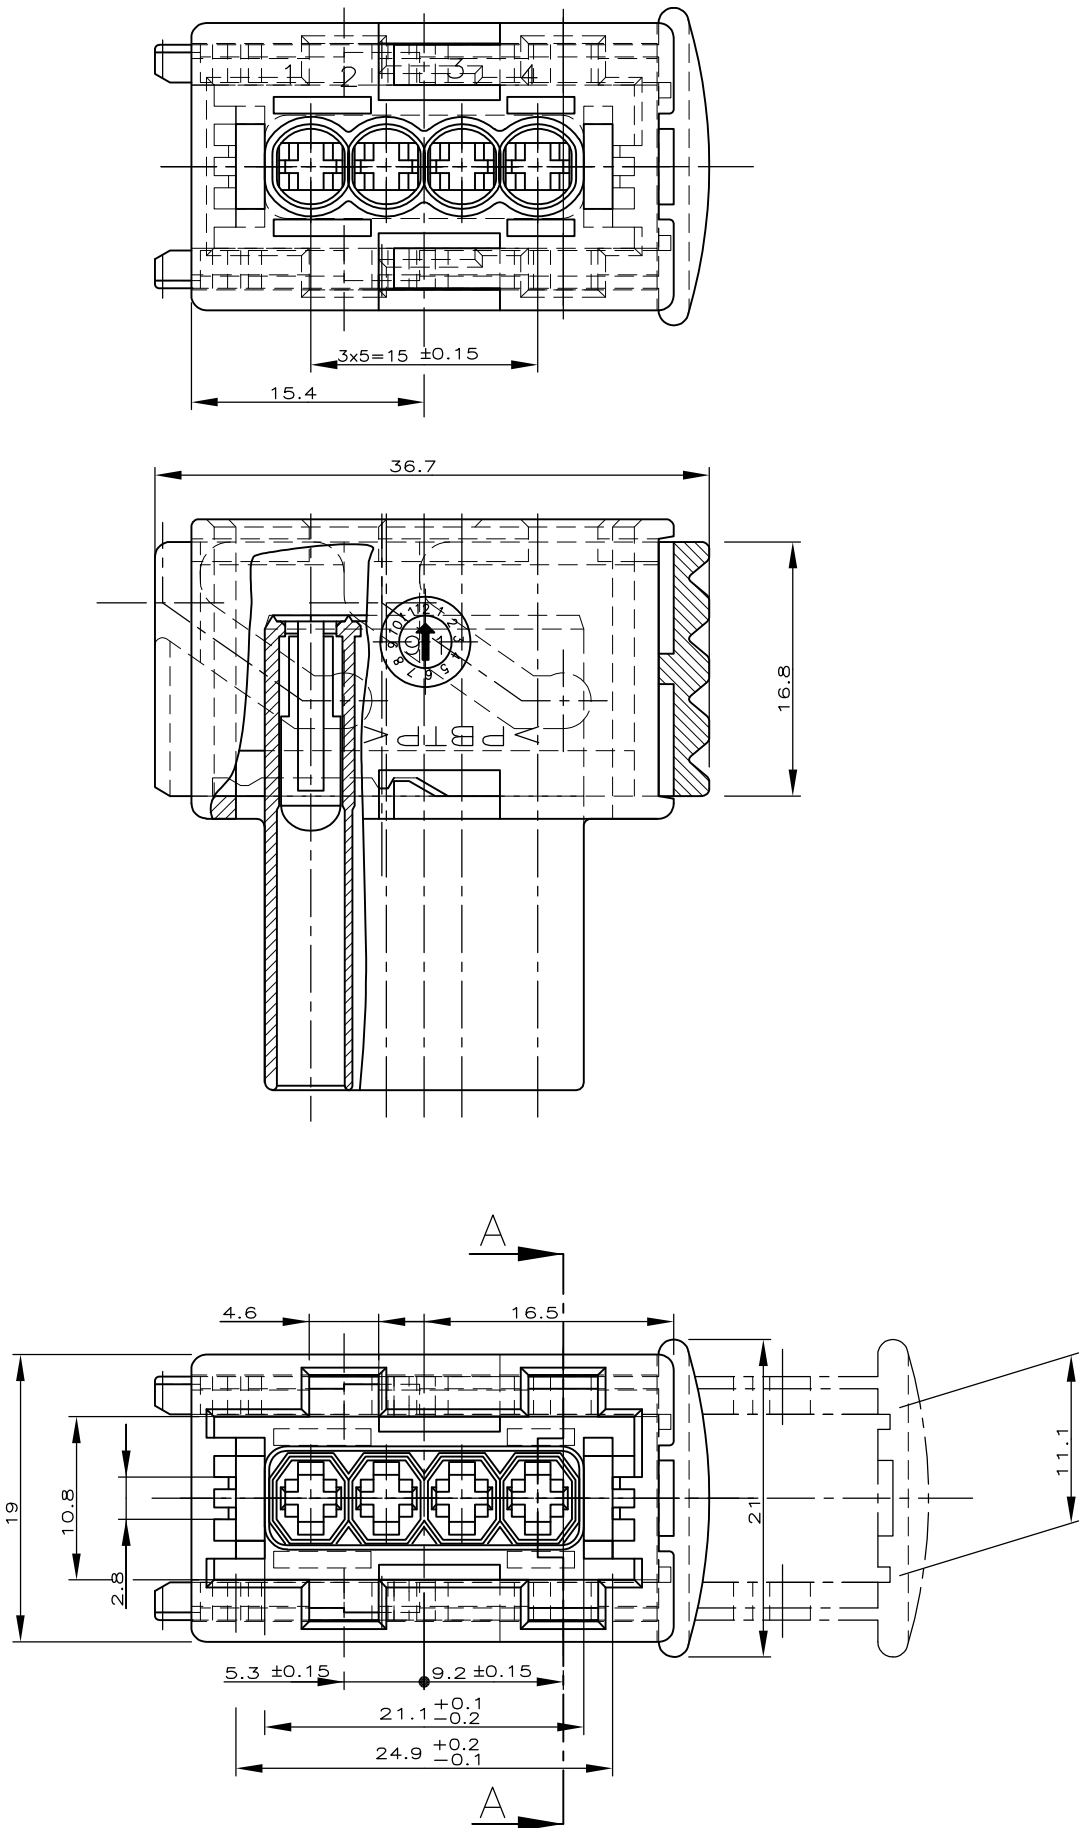

SCHNITT A-A

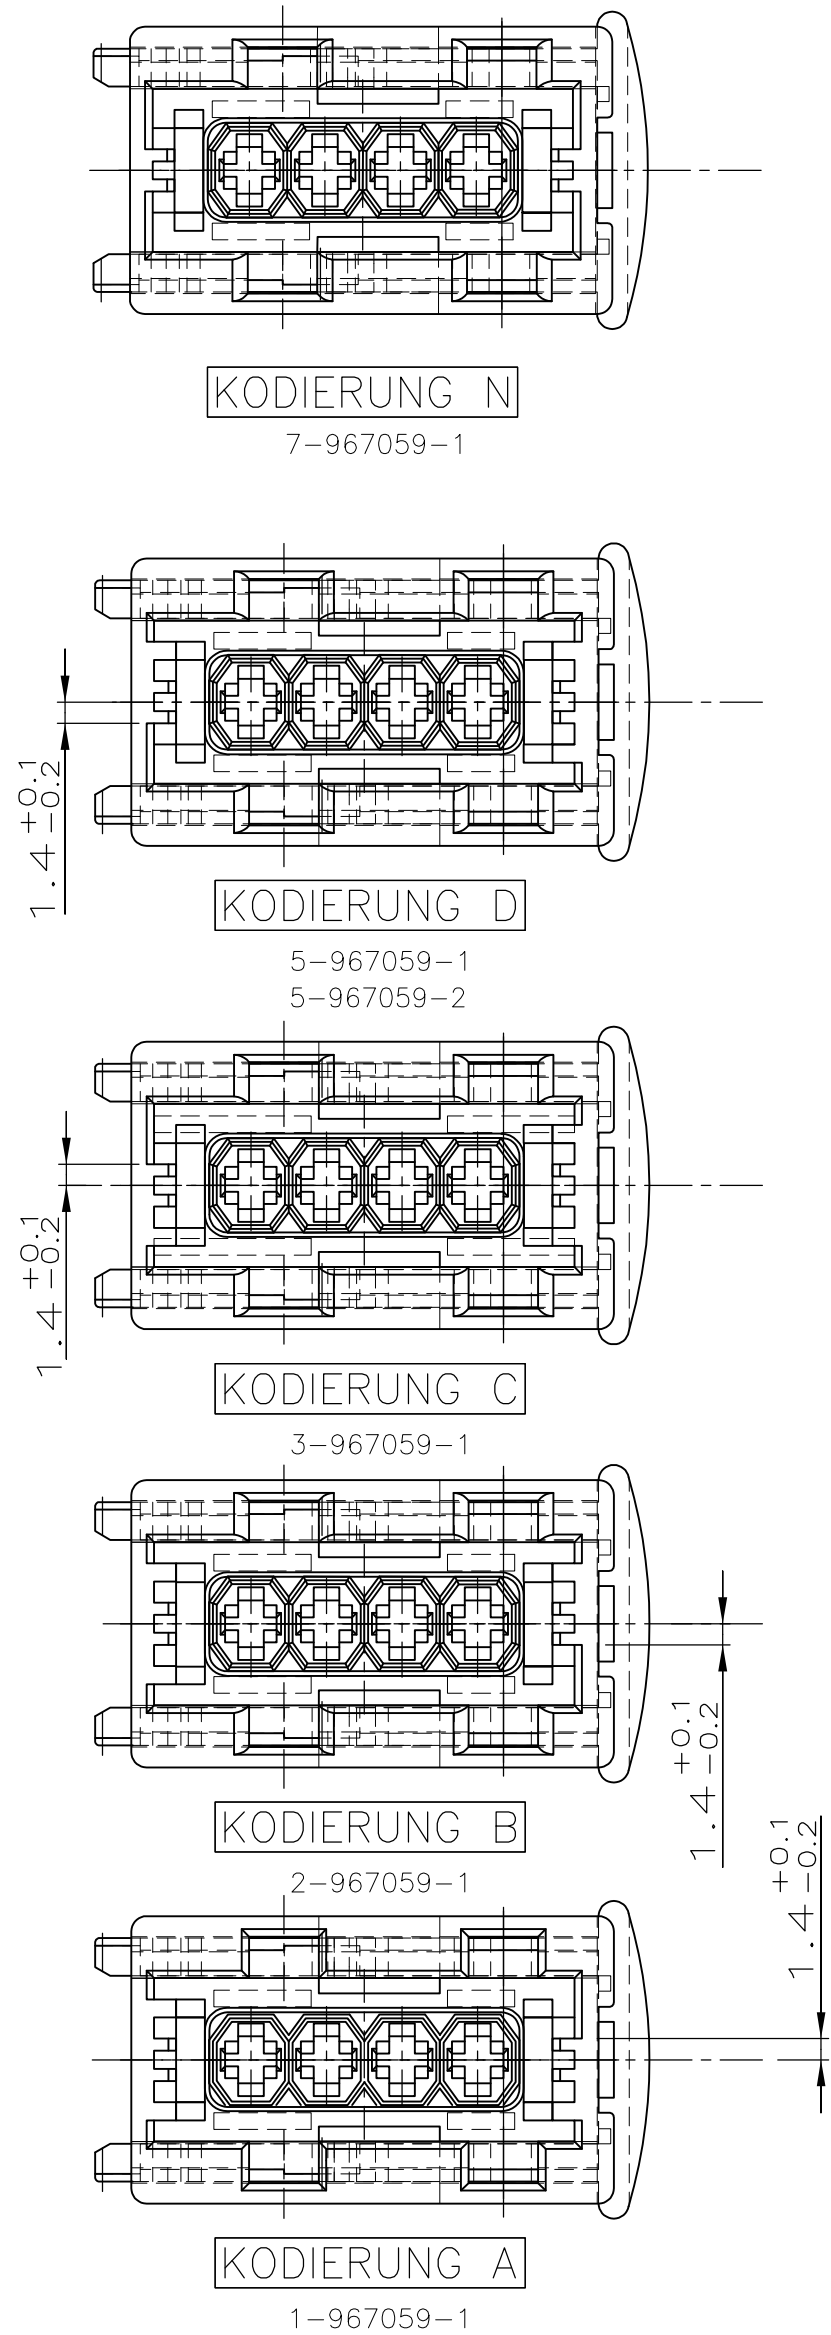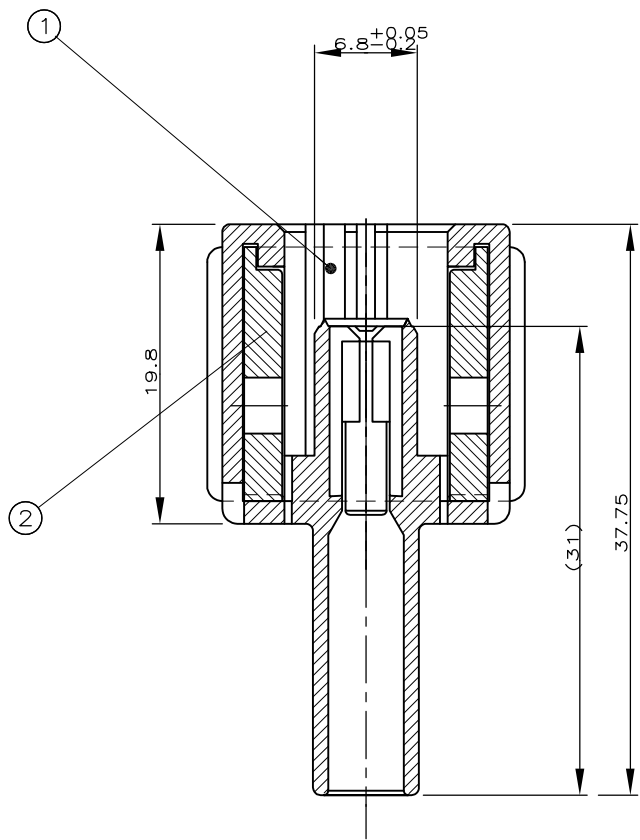

5-965261-1	N	7-967059-1	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	weiß(WHITE)
4-965261-2	D	5-967059-2	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	grün (GREEN)
4-965261-1	D	5-967059-1	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	braun(BROWN)
-	-	-	-	-	-	-	-
3-965261-1	C	3-967059-1	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	blau(BLUE)
2-965261-1	B	2-967059-1	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	grau(GREY)
1-965261-1	A	1-967059-1	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	schwarz(BLACK)
PASSENDES STIFTGEHÄUSE	KODIERUNG	BESTELL-NR.	POS.	STÜCK	BENENNUNG EINZELTEIL	WERKSTOFF	OBERFLÄCHE FARBE

ZEICHNUNG GÜLTIG AB		
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SCHWAEGER 12.01.93
		CHK RYLL 12.01.93
		APVD —
DIMENSIONS:		PRODUCT SPEC
mm		APPLICATION SPEC
		WEIGHT —
		CUSTOMER DRAWING
		SCALE 5:1
		SHEET 1 of 1
		REV C1

NAME		TE Connectivity	
4 POL. J-P-T Gehäuse (4 POS. J-P-T HSG. ASS'Y)		RESTRICTED TO	
SIZE	CAGE CODE	DRAWING NO	
A2	00779	C=967059	
SCALE 5:1		SHEET 1 of 1	REV C1