

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	REVISED PER ECO-16-006308	08AUG2016	NK	MM

D

C

B



A

D


C

B


A

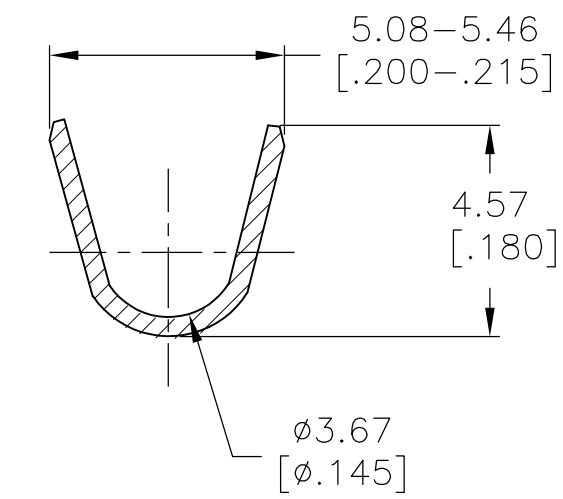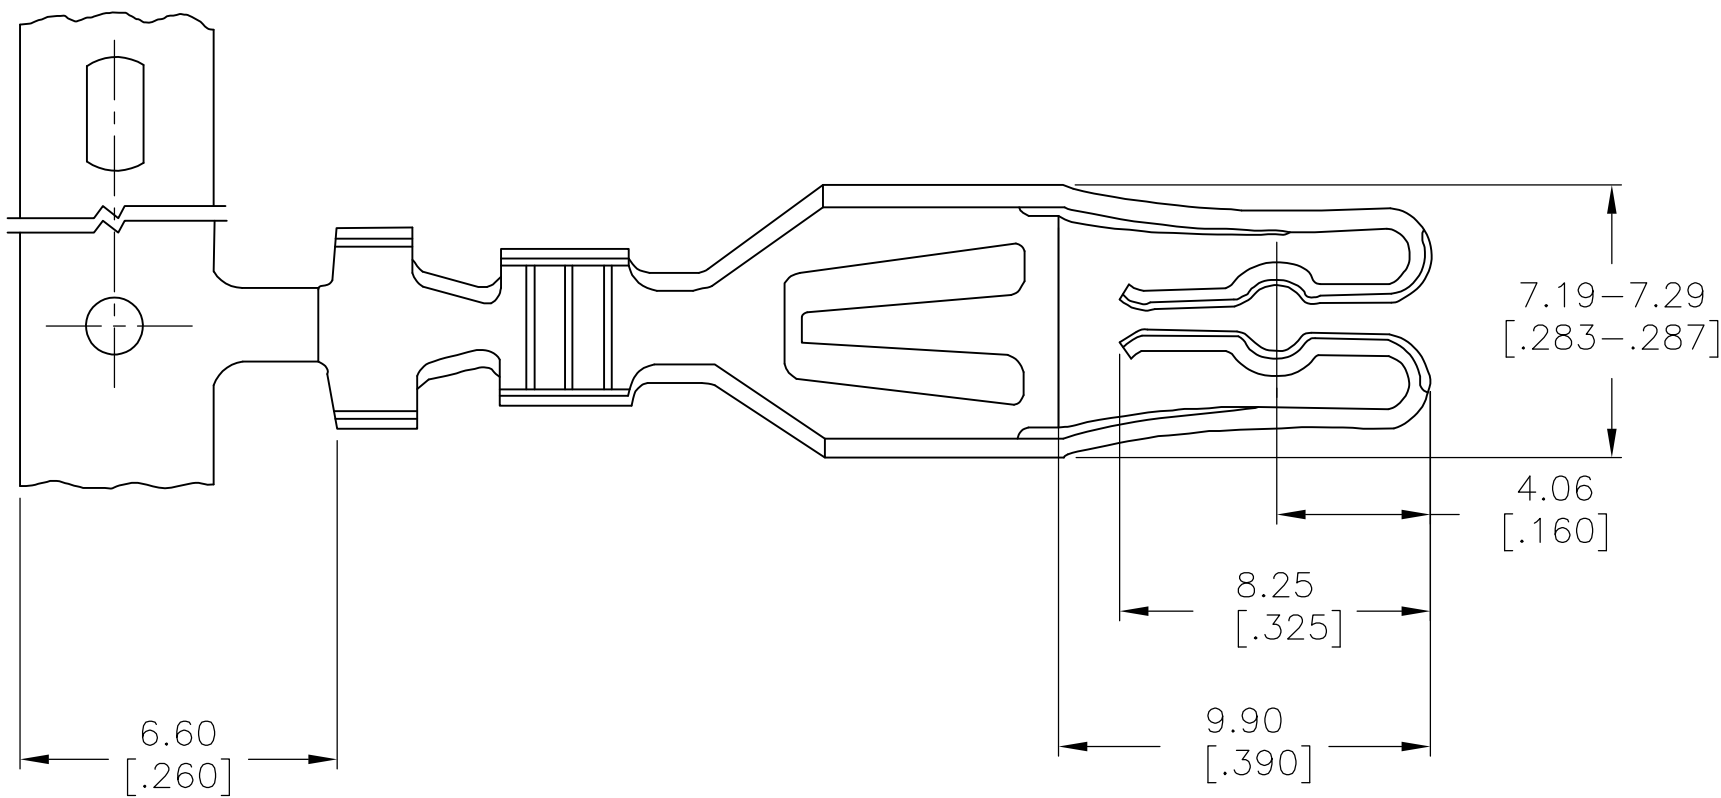

INSULATION RANGE 2.29-3.68
[.090-.145]
SECTION, A-A

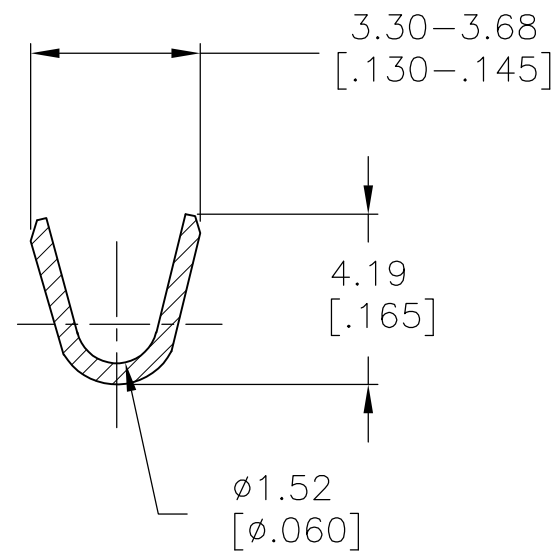

WIRE RANGE 14-16
SECTION, B-B

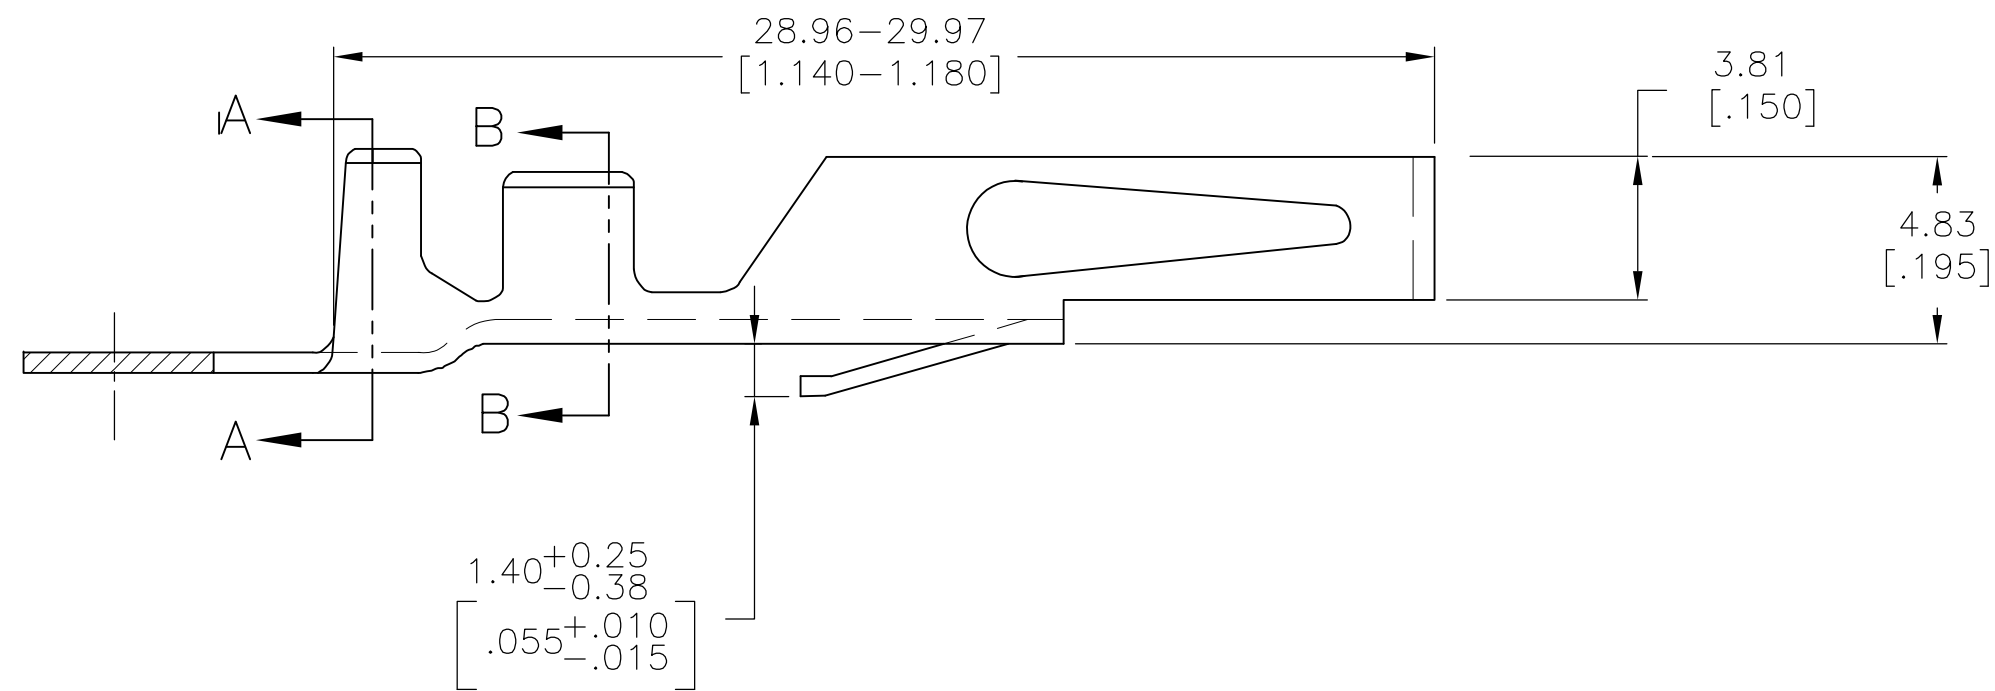

- 1
- 0.0038[.000150] BRIGHT TIN OVER 0.00076[.000030] NICKEL.
- 2
- SILVER PLATE 0.0038[.000150] MIN THK ALL OVER.
- 3
- 0.0038[.000150] MATTE TIN OVER 0.00076[.000030] NICKEL

3	5-530517-2
2	530517-3
1	530517-2
FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	15 MAY 75		 TE Connectivity							
		CHK	15 MAY 75									
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	16 MAY 75		NAME					
	PRODUCT SPEC			CONTACT HIGH CURRENT STRIP								
	—											
	APPLICATION SPEC											
	—											
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO				
ALLOY CDA-194		—		WEIGHT	—		A2	00779	C=530517	—		
CUSTOMER DRAWING				SCALE		5:1		SHEET	1 of 1		REV	K