


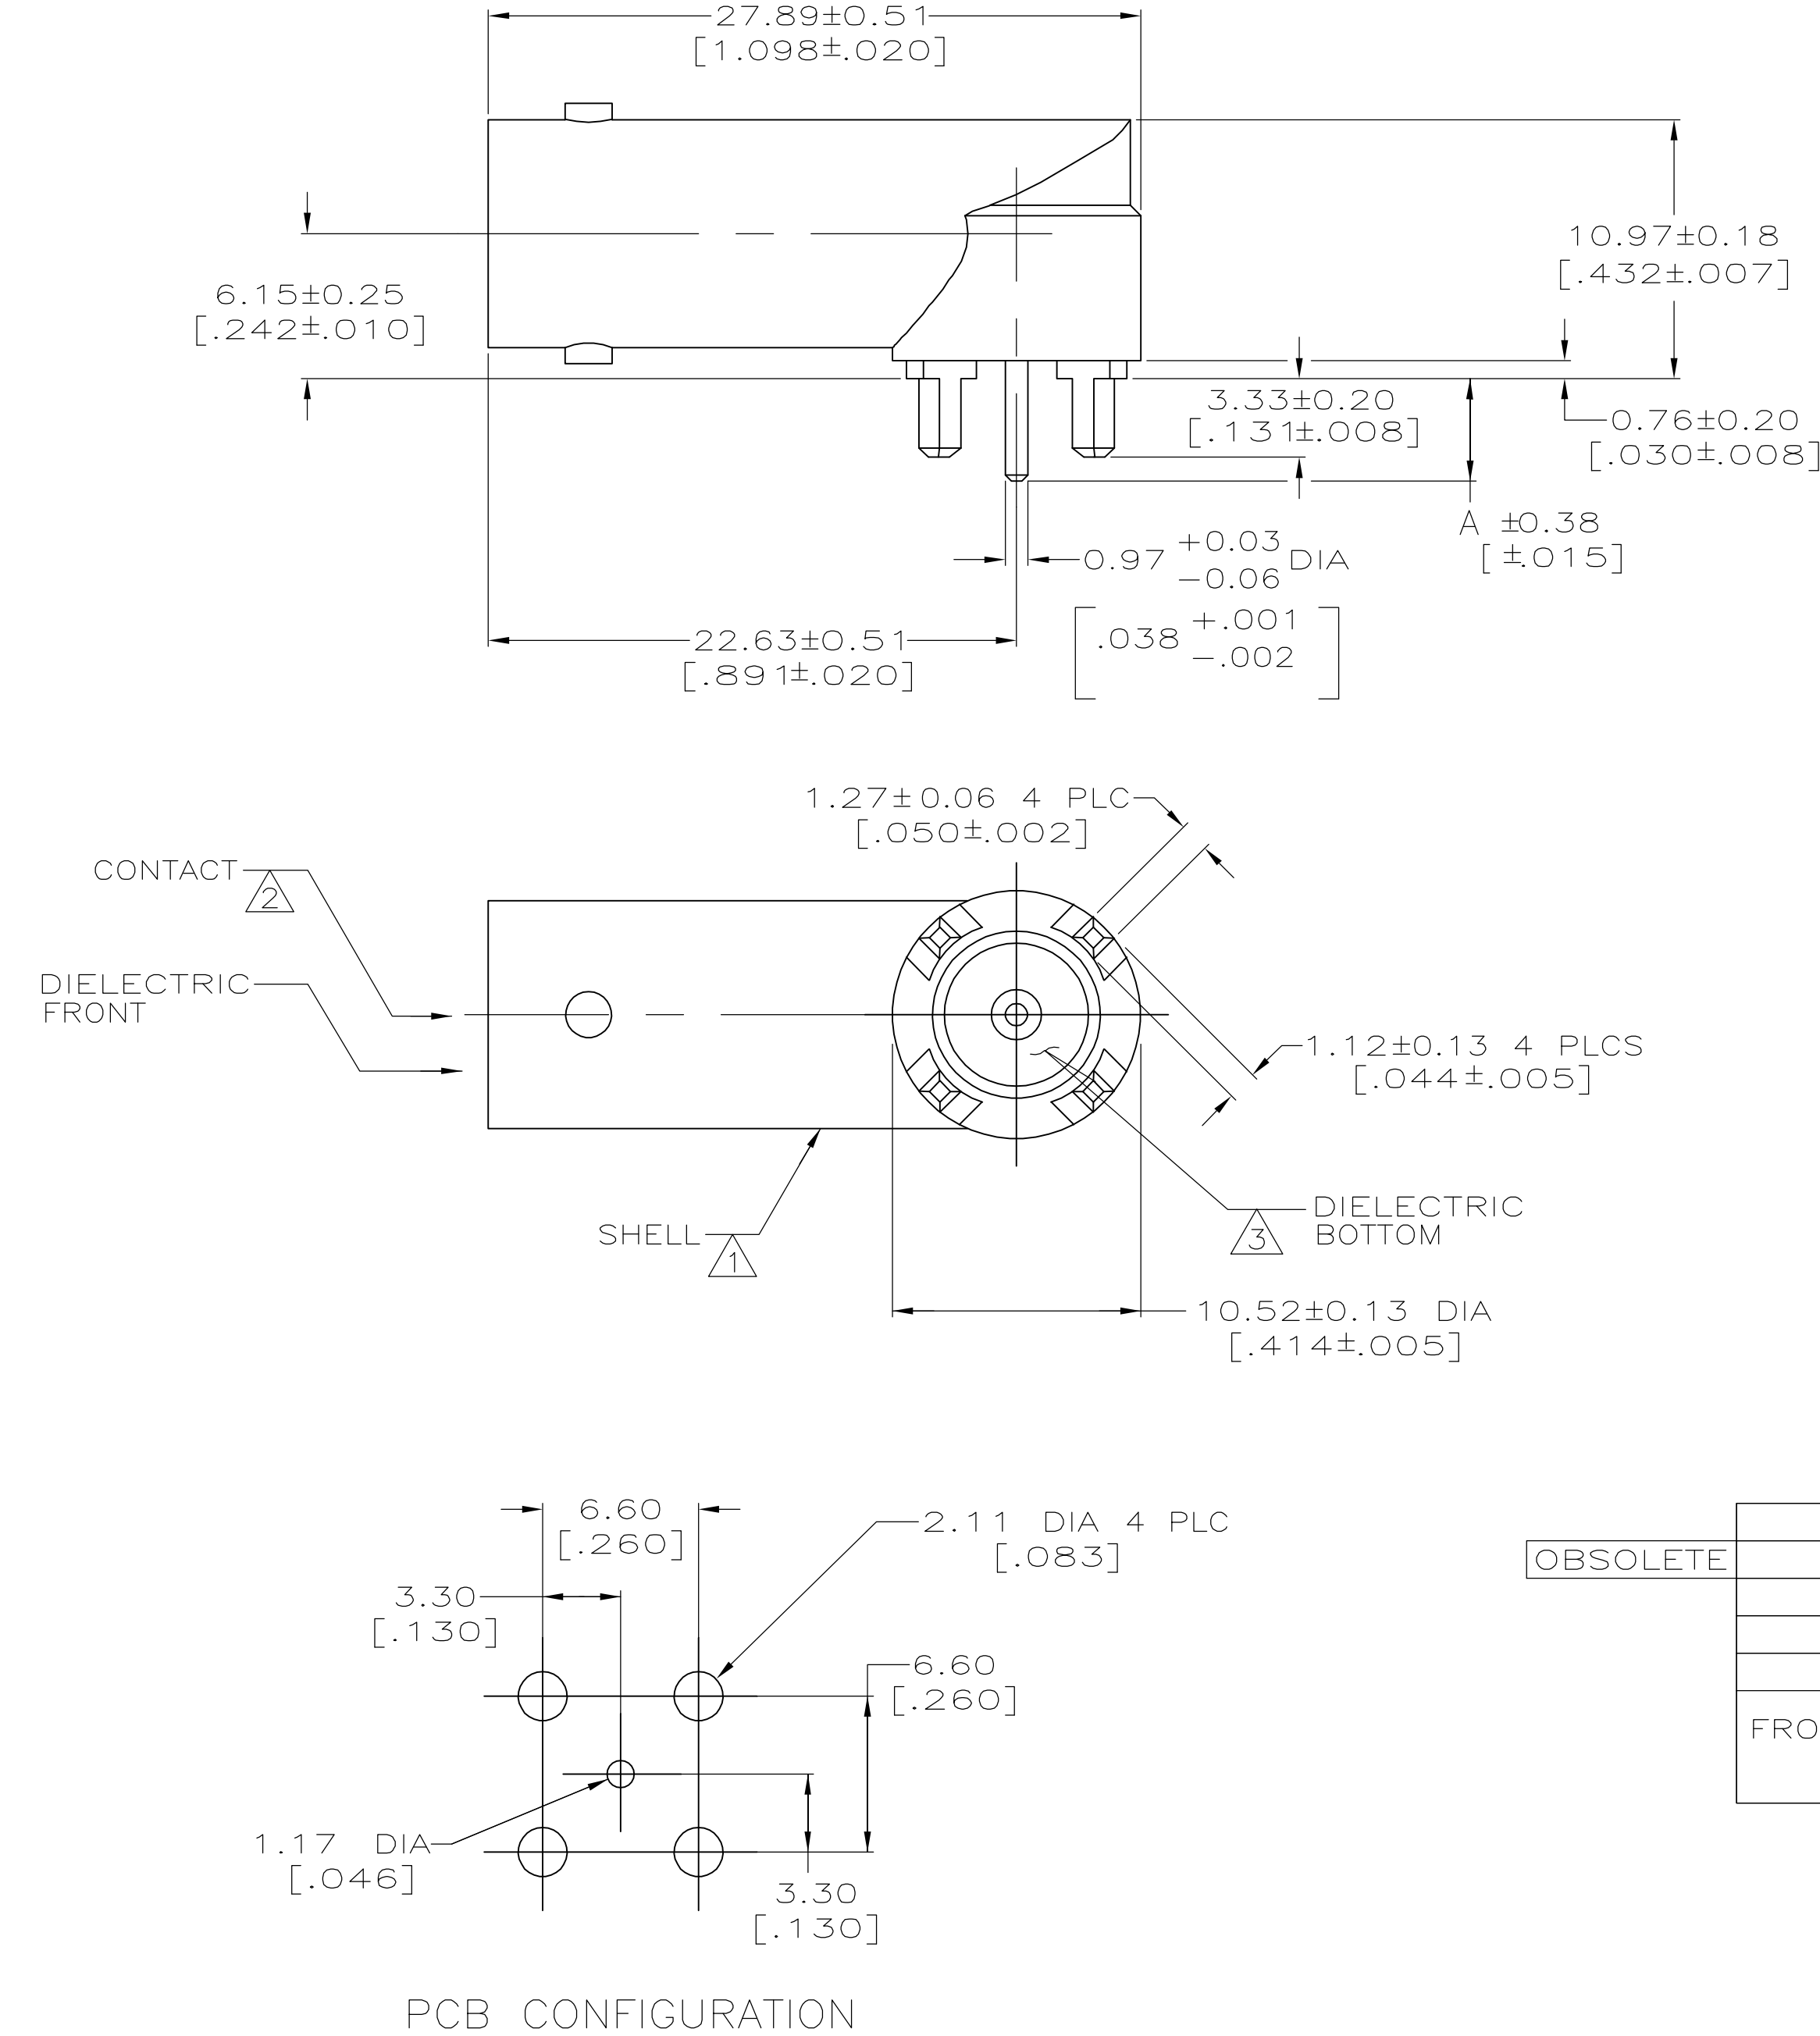

- 1 ZINC PER QQ-Z-363.
- 2 BERYLLIUM COPPER PER QQ-C-530.
- 3 PTFE PER MIL-P-19468.
- 4 NICKEL PLATE PER QQ-N-290, 3.81 μ m [.000150] MINIMUM THICK.
- 5 TIN-LEAD PLATE PER ASTM-B-545, 3.04 μ m [.000120] MINIMUM THICK OVER NICKEL PLATE PER MIL-C-26074, 7.62 μ m [.000300] MINIMUM THICK.
- 6 GOLD PLATE PER MIL-G-45204, 1.27 μ m [.000050] MINIMUM THICK.
- 7. INTERFACE PER MIL-C-39012.
- 8 GOLD PLATE PER MIL-G-45204, 0.76 μ m [.000030] MINIMUM THICK.
- 9 POLYMETHYLPENTENE: GENERAL PURPOSE

OBSOLETE	9	4.34 [.171]	8	4	413558-5
	9	4.34 [.171]	8	5	413558-4
	9	3.33 [.131]	6	4	413558-3
	3	4.34 [.171]	6	5	413558-2
	9	4.34 [.171]	6	4	413558-1
FRONT DIELECTRIC MATERIAL		A	CONTACT FINISH	SHELL FINISH	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J. LIPPERT 7-1-91	tyco Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK A. GABANY 8-5-91		
		0 PLC ± -	APVD A. GABANY 8-5-91	NAME JACK, RIGHT ANGLE, PCB, 75 OHM, SERIES BNC	
		1 PLC ± -	PRODUCT SPEC		
MATERIAL SEE NOTES 1-3		2 PLC ± 0.08 [.003]	108-12078	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
		3 PLC ± -	APPLICATION SPEC		
FINISH SEE NOTES 4-6		4 PLC ± -	—	A2 00779 C=413558	
		ANGLES ± -	WEIGHT —		
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 of 1
				REV T	