

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

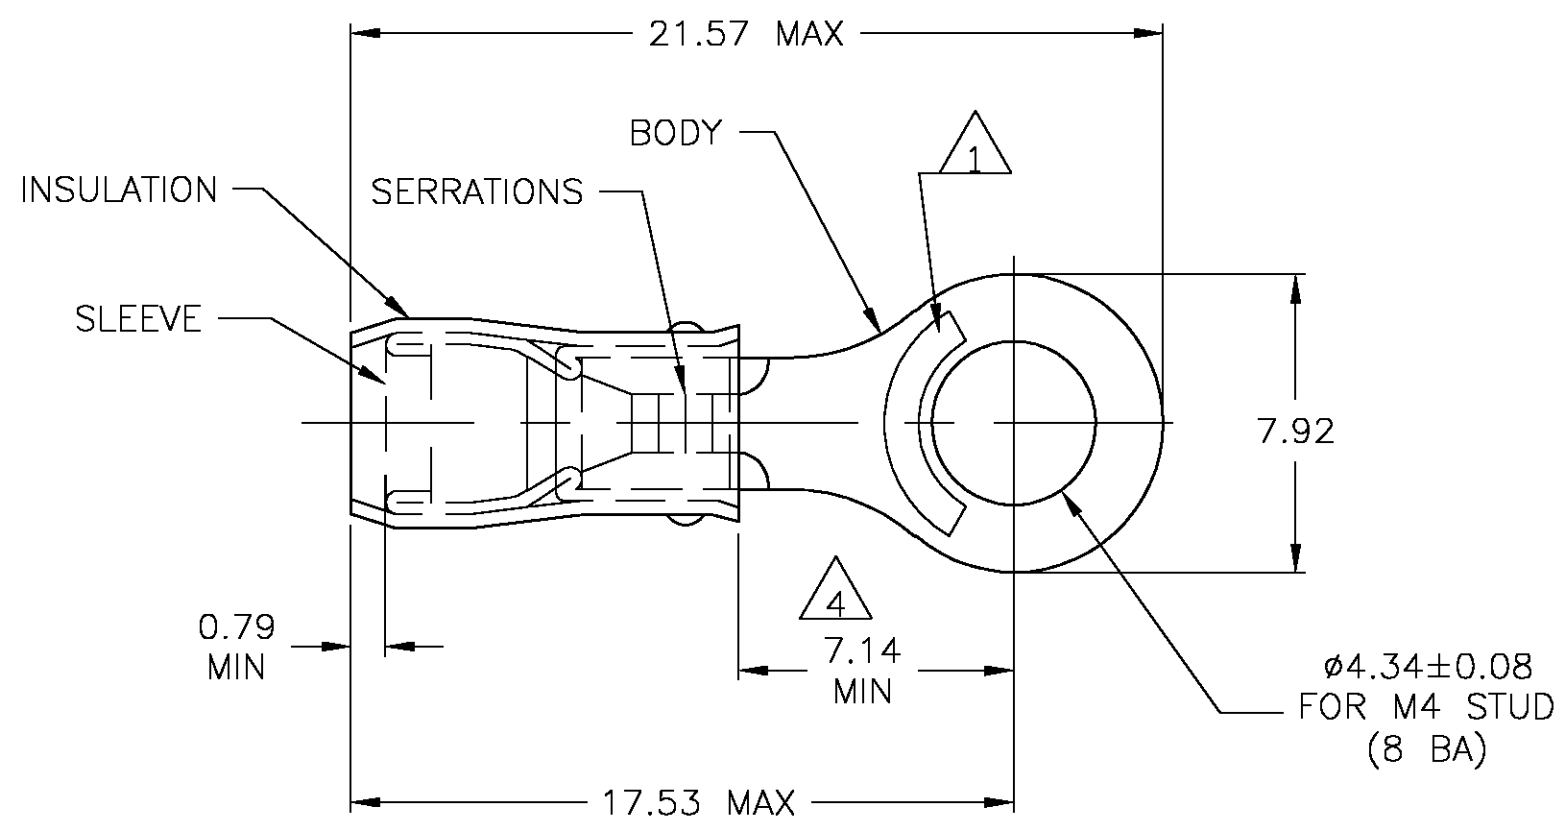
RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
GDIST
14

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REV PER 0G3A-0002-04	05MAR04	JR	TM

AMP
WIRE RANGE22-16 AWG
SOLID OR STRANDED

- 1 STAMP AMP 22-18*, LOCATED APPROX AS SHOWN. STAMPING MAY BE ON TOP OR BOTTOM.
- 2 WIRE INSULATION DIA: 2.67-3.56
- 3 TONGUE MATERIAL THK: 0.84 MAX
- 4 FROM THE EDGE OF METAL WIRE BBL TO CENTER OF STUD HOLE.
- 5 105°C [221°F] MAX OPERATING TEMP.
- 6 VOLTAGE RATING, 300V MAX
- 7 MATERIAL: BODY- COPPER ASTM B-152
SLEEVE: NYLON, RED
- 8 FINISH: BODY- TIN PLATE PER ASTM B545

LOOSE PIECE 150317-0

PACKAGE TYPE PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN JR RUTH 05MAR2004

CHK T MICHIELUTTI 05MAR04

APVD T MICHIELUTTI 05MAR04

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -


CUSTOMER DRAWING

tyco
ElectronicsTyco Electronics Corporation
Harrisburg, Pa 17105-3608NAME
TERMINAL, RING TONGUE, P.I.D.G.,
WIRE SIZE 22-16 AWG

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 00779 C-150317

SCALE 5:1 SHEET 1 OF 1 REV A

DIMENSIONS:
mmTOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± .02
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

MATERIAL

-7

-8