


LOC		DIST		REVISIONS							
G	14	P	F	ZONE	LTR	DESCRIPTION			DATE	APPD	
					0	RELEASED PER PR 95-71			21AUG95	OKS MJS	

METRIC

DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	 E13288 Listed
2 AWG SOLID OR STRANDED	PENDING
 LR7189 Certified	MILITARY P/N AND CLASS
2 AWG SOLID OR STRANDED	NOT APPLICABLE

1 STAMP AMP 2W* APPROX AS SHOWN

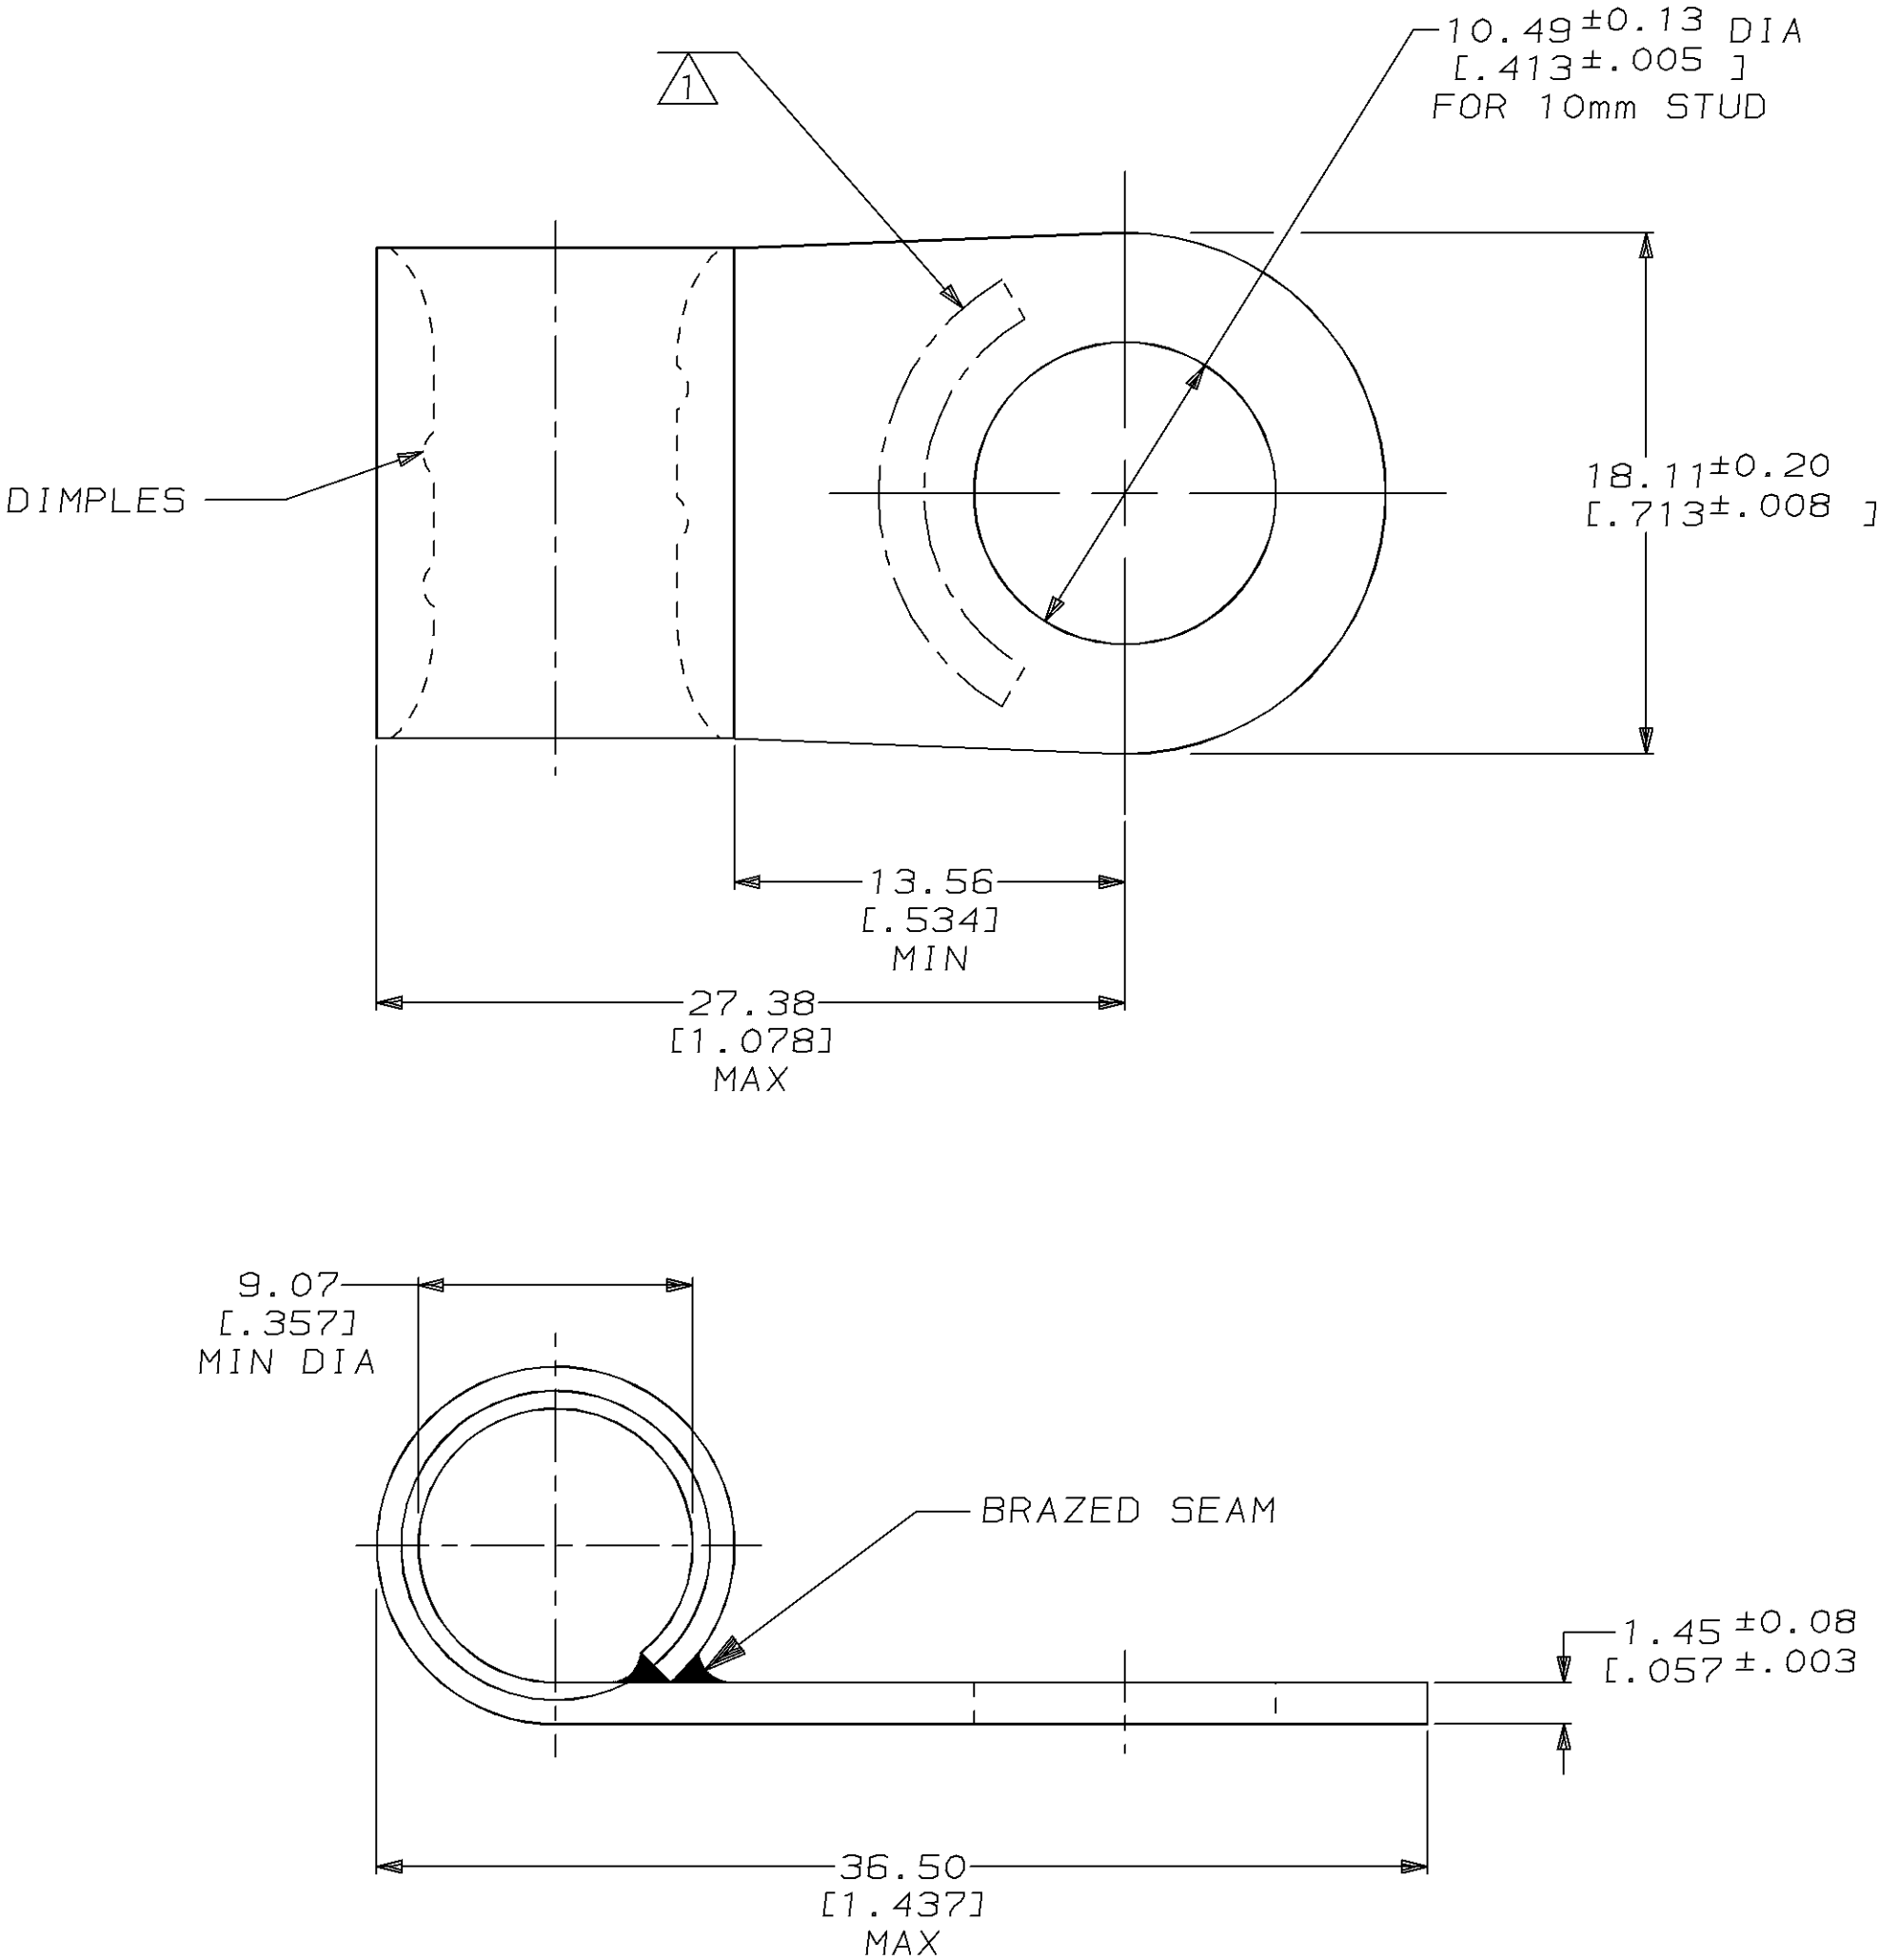

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX		DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20[0.008] 3 PLC DEC ± - ANGLES ± -		DR 10AUG95 DK SCHRUM CHK 10AUG95 MJ SPICER APPD 10AUG95 CH KULYNYCH APPD 10AUG95 JL MECKLEY PRODUCT SPEC -		AMP AMP Incorporated Harrisburg, PA 17105-3608		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE	WIRE CROSS SECTIONAL AREA RANGE: 26.7-42.4mm² [52,600-83,700] CIR MILS SOLID OR STRANDED	COPPER PER ASTM B-152 ANNEALED	MATERIAL	FINISH TIN PLATE 0.00254[0.000100] MIN THK PER MIL-T-10727	APPLICATION SPEC -	WEIGHT -	NAME TERMINAL, RING TONGUE, FLAG, SOLISTRAND™		
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.						SIZE CAGE CODE DRAWING NO		C=184147	
FOR ORDER ENTRY	1-800-526-5142							SCALE 4:1		SHEET 1 OF 1	