



SIDE VIEW

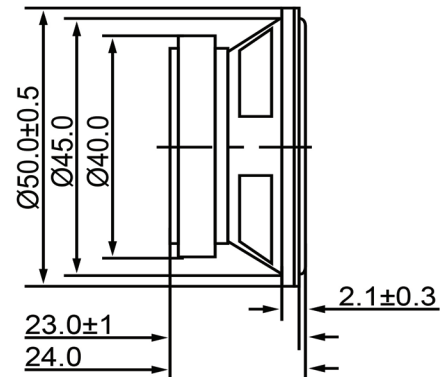

BOTTOM VIEW

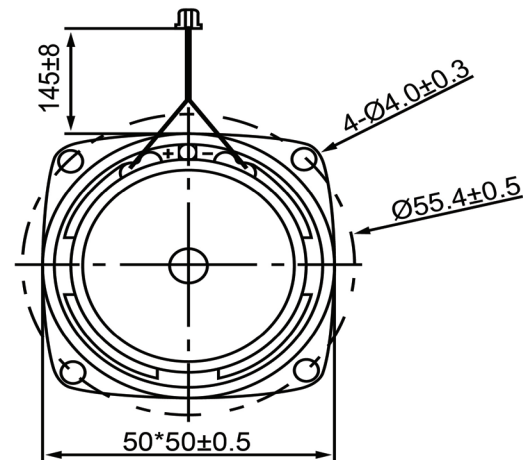

Specifications

Description	Value	Unit
Shape	Rectangle	
Resonant Frequency	220	(Hz)
Frequency Range	220 ~ 20,000	(Hz)
SPL @ 10cm	80	(dBA)
Impedance	8	(Ohm)
Cone Material	Paper	
Nominal Power	5	(W)
Max Power	7	(W)
Mount Type	Frame	
Operating Temperature	-25 ~ +55	°C
Storage Temperature	-25 ~ +55	°C
Weight	82	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
- 2) All parts meet RoHS



DB UNLIMITED

Dynamic Speaker

Revision History

Version	Description			Date	Approved
1	Released from Engineering			10/21/2013	J.S

SP500208-2