

Sensor/actuator connector - SACC-M12MS-4QO-0,34-M OL OT - 1420388

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Your advantages

- ✓ Safe use in the field, thanks to a high degree of protection
- ✓ Flexible: connectors for on-site assembly
- ✓ Insulation displacement connection: innovative and time-saving assembly without stripping the single wire

RoHS

Key Commercial Data

Packing unit	100 pc
Minimum order quantity	1000 pc
GTIN	 4 055626 206363
GTIN	4055626206363

Technical data

General

Rated current at 40°C	4 A
Rated voltage	125 V
Number of positions	4
Standards/regulations	M12 connector IEC 61076-2-101
Status display	No
Overvoltage category	II
Degree of pollution	3

Material

Flammability rating according to UL 94	V0
--	----

Cable

Sensor/actuator connector - SACC-M12MS-4QO-0,34-M OL OT - 1420388

Technical data

Cable

Standards/specifications	M12 connector IEC 61076-2-101
--------------------------	-------------------------------

Standards and Regulations


Standard designation	M12 connector
Standards/regulations	IEC 61076-2-101
Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


Drawings

Schematic diagram



Pin assignment M12 plug, 4-pos., A-coded, view
plug side

Dimensional drawing

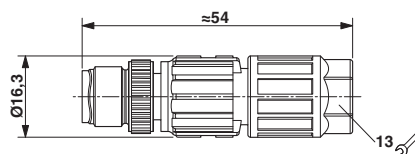

Plug, M12 x 1, straight, shielded

Functional drawing

