


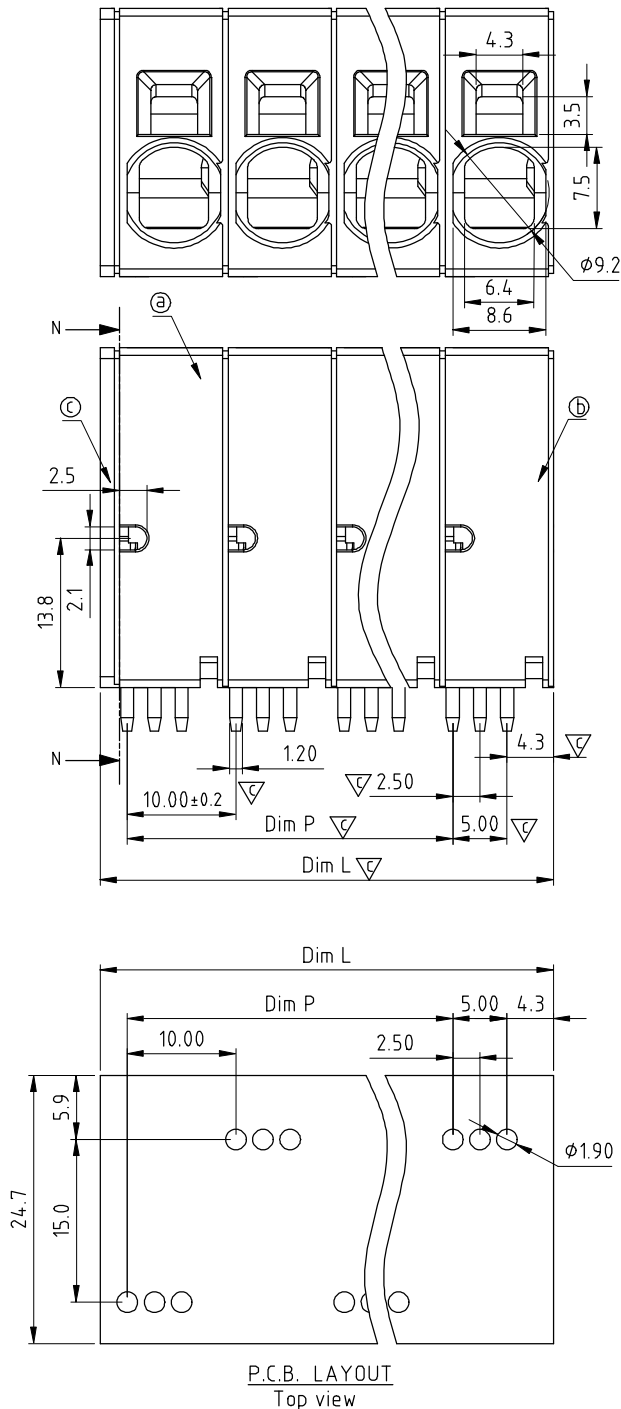

DIM		Tolerance		
		2P--4P	6P--8P	10-12P
Dim P	(N-1)×10.0	±0.40	±0.50	±0.60
Dim L	N×10.0±1.8	±0.40	±0.50	±0.60

	NP	<u>xx</u>	1	0	<u>x</u>	1	xxxx	<u>G</u>		RoHS compliant (lead<4%) In copper Alloy
No. OF POLES										
02: 2POLES										0000: "@" Logo (Standard)
04: 4 POLES										000A: "ANYTEK" Mark
06: 6 POLES										Any special item by customer request.
:										please contact sales department.
12: 12 POLES										
	Body Color									
	0	Black (RAL9005)								
	2	Red (RAL3001/D)								
	3	Orange(RAL2011/P)								
	4	Yellow(RAL1018/A)								
	5	Green(RAL6018/T)								
	6	Blue (RAL5015/A)								
	8	Grey(RAL7004/P)								
	9	White(RAL1102)								
	C	Multiple colors								

ANYTEK				CUSTOMER COPY			
				ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	NP 10.0mm Series Vertical (B type; Frnot contact link together with end cover) Even number						
PART NO.	NPxx10x1xxxxG			DWG NO.	8NP0103		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Airy min 2015.02.01	Airy min 2015.02.01			UNIT: mm	X. ±0.50
						SCALE: NONE	X.X ±0.30
				SHEET: 01/01	REV: B		X.XX ±0.10
							X° ±1°