


# AVERY DENNISON MARKETING SPECIFICATION

## HISTORY

REV.	DATE	DESCRIPTION
B	12.16.14	UPDATE FORMAT, CHG DIM 5 AND ADDED NOTE TO DIM 5; ADDED UL LOGO AND FLAME RATING NOTE

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS UNLAWFULLY DISCLOSED TO OTHERS. ANY REPRODUCTION OR USE OF THIS PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY, IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

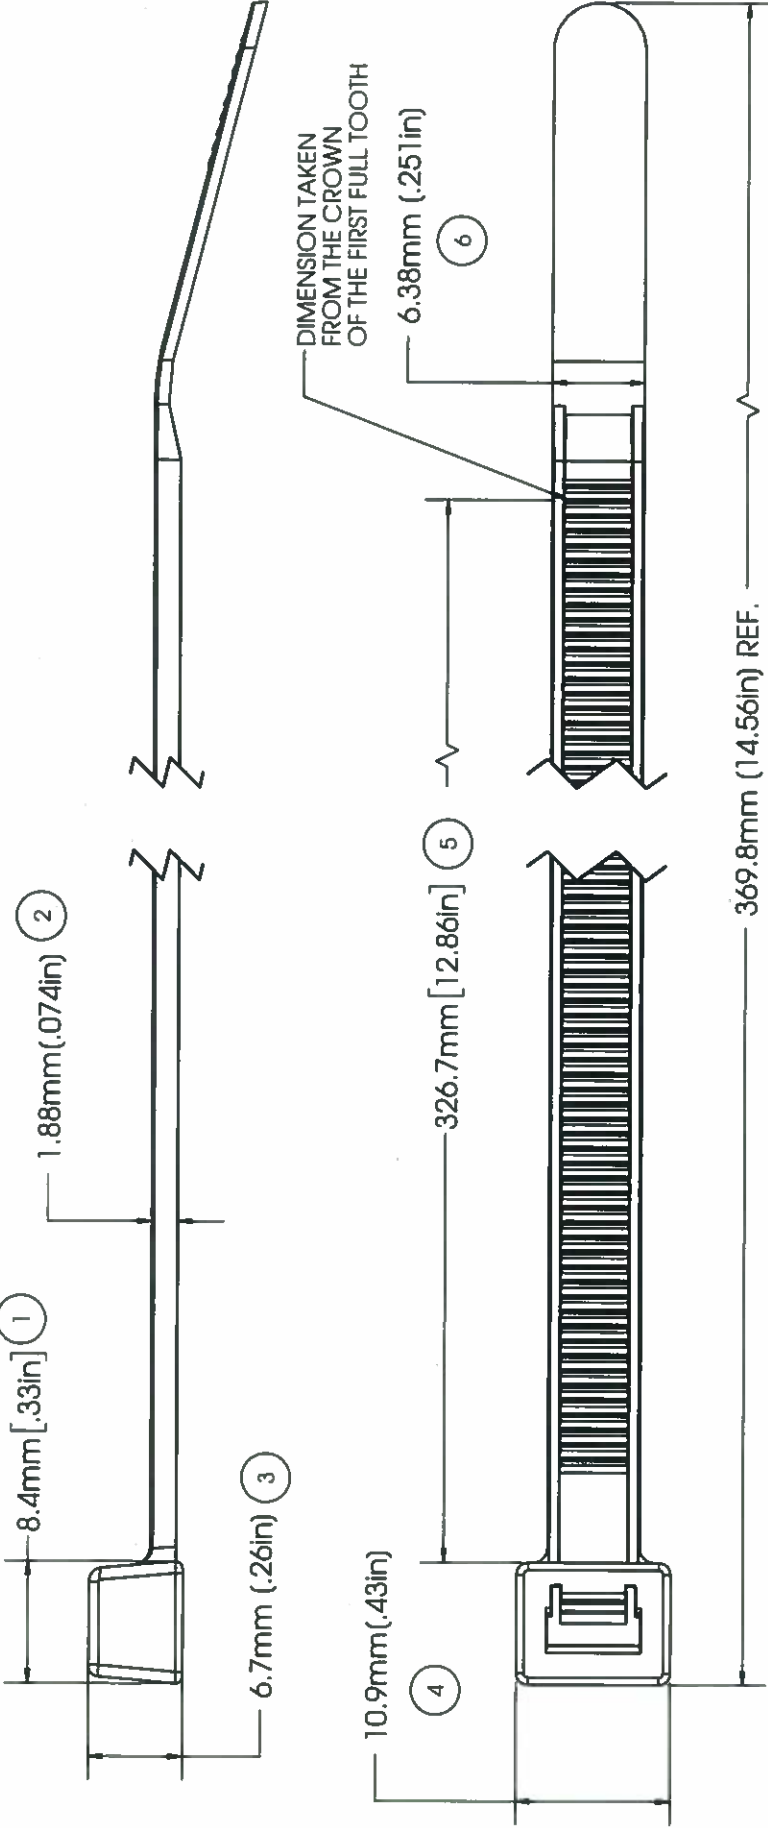

NOTE: THESE CABLE TIES ARE UV RESISTANT AND HAVE A FLAMMABILITY RATING OF V-2

ENG. APPR. *LOM* 12/16/14  
 G.A. APPR. *LS* 12-16-14

APPROVALS:

APPROVALS: *LOM* 12/16/14

SPECIFIED TOLERANCES ARE:  
 .XX ± .03 IN. X ± .7 MM  
 .XXX ± .010 IN. .XX ± .25 MM  
 ANGULAR: ± 2°

NOTE: THESE CABLE TIES ARE UV RESISTANT AND HAVE A FLAMMABILITY RATING OF V-2

APPROVALS:

ENG. APPR. *LOM* 12/16/14  
 G.A. APPR. *LS* 12-16-14

APPROVALS:

MILITARY STANDARD:	MS-3367-3-0
LOOP TENSILE STRENGTH:	120 LBF /534N MIN. PER AS-23190
OPERATING TEMP:	-40°F(-40°C) TO 176°F (80°C)
MIN. INSTALLATION TEMP:	32°F(0°C)
WEIGHT:	.155 OZ./4.58g
BUNDLE DIAMETER:	Ø4.7mm(.19in) TO Ø101.6mm(4.00in)
TOOL:	12001 - HAND INSTALLATION TOOL 12500 - PNEUM. INSTALLATION TOOL
TOOL TENSION SETTING:	6 - 8 ON HEAVY DUTY TOOL
PACKAGING:	50/BAG, 1000/CASE

APPROVALS:

APPROVALS:

APPROVALS:

SPECIFIED TOLERANCES ARE:  
 .XX ± .03 IN. X ± .7 MM  
 .XXX ± .010 IN. .XX ± .25 MM  
 ANGULAR: ± 2°

NOTE: THESE CABLE TIES ARE UV RESISTANT AND HAVE A FLAMMABILITY RATING OF V-2

APPROVALS:

MILITARY STANDARD:	MS-3367-3-0
LOOP TENSILE STRENGTH:	120 LBF /534N MIN. PER AS-23190
OPERATING TEMP:	-40°F(-40°C) TO 176°F (80°C)
MIN. INSTALLATION TEMP:	32°F(0°C)
WEIGHT:	.155 OZ./4.58g
BUNDLE DIAMETER:	Ø4.7mm(.19in) TO Ø101.6mm(4.00in)
TOOL:	12001 - HAND INSTALLATION TOOL 12500 - PNEUM. INSTALLATION TOOL
TOOL TENSION SETTING:	6 - 8 ON HEAVY DUTY TOOL
PACKAGING:	50/BAG, 1000/CASE

APPROVALS:

APPROVALS:

APPROVALS:

SPECIFIED TOLERANCES ARE:  
 .XX ± .03 IN. X ± .7 MM  
 .XXX ± .010 IN. .XX ± .25 MM  
 ANGULAR: ± 2°

NOTE: THESE CABLE TIES ARE UV RESISTANT AND HAVE A FLAMMABILITY RATING OF V-2

APPROVALS:

MILITARY STANDARD:	MS-3367-3-0
LOOP TENSILE STRENGTH:	120 LBF /534N MIN. PER AS-23190
OPERATING TEMP:	-40°F(-40°C) TO 176°F (80°C)
MIN. INSTALLATION TEMP:	32°F(0°C)
WEIGHT:	.155 OZ./4.58g
BUNDLE DIAMETER:	Ø4.7mm(.19in) TO Ø101.6mm(4.00in)
TOOL:	12001 - HAND INSTALLATION TOOL 12500 - PNEUM. INSTALLATION TOOL
TOOL TENSION SETTING:	6 - 8 ON HEAVY DUTY TOOL
PACKAGING:	50/BAG, 1000/CASE

APPROVALS:

APPROVALS:

APPROVALS:

SPECIFIED TOLERANCES ARE:  
 .XX ± .03 IN. X ± .7 MM  
 .XXX ± .010 IN. .XX ± .25 MM  
 ANGULAR: ± 2°

NOTE: THESE CABLE TIES ARE UV RESISTANT AND HAVE A FLAMMABILITY RATING OF V-2

APPROVALS:

MILITARY STANDARD:	MS-3367-3-0
LOOP TENSILE STRENGTH:	120 LBF /534N MIN. PER AS-23190
OPERATING TEMP:	-40°F(-40°C) TO 176°F (80°C)
MIN. INSTALLATION TEMP:	32°F(0°C)
WEIGHT:	.155 OZ./4.58g
BUNDLE DIAMETER:	Ø4.7mm(.19in) TO Ø101.6mm(4.00in)
TOOL:	12001 - HAND INSTALLATION TOOL 12500 - PNEUM. INSTALLATION TOOL
TOOL TENSION SETTING:	6 - 8 ON HEAVY DUTY TOOL
PACKAGING:	50/BAG, 1000/CASE

APPROVALS:

APPROVALS:

APPROVALS:

SPECIFIED TOLERANCES ARE:  
 .XX ± .03 IN. X ± .7 MM  
 .XXX ± .010 IN. .XX ± .25 MM  
 ANGULAR: ± 2°

NOTE: THESE CABLE TIES ARE UV RESISTANT AND HAVE A FLAMMABILITY RATING OF V-2

APPROVALS:

**UL** LISTED  
 POSITIONING DEVICE  
 E57800  
 TYPE 21

**AVERY DENNISON**

FASTENER DIVISION  
 FT. CHARLES, MA 01160 U.S.A.  
 TEL: 1-800-225-9713  
 FAX: 978-353-8157

DESCRIPTION	14.5" CABLE TIE, HEAVY DUTY
STOCK NO.	08382-0
REV.	B

1

2

3

4

5