

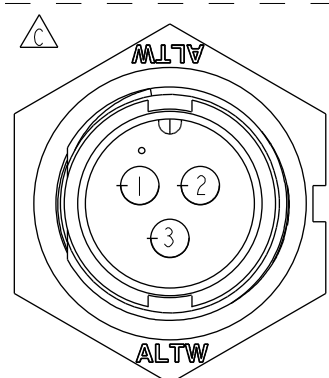

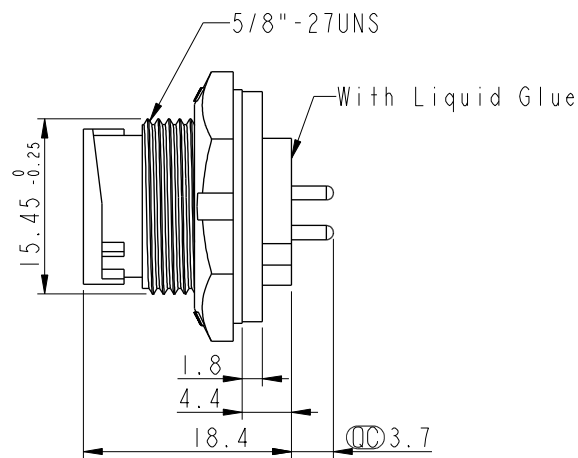
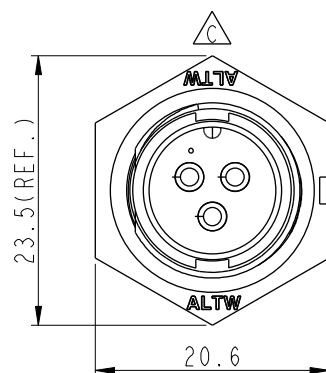




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0351	2008/09/17	Shin	Add Note and Update Drawing to New Format
C	LEN1540239	2014/12/23	Jinhai	Change Logo
D	CI90274	2019/02/20	Ruru	Modify Note



Pin Assignments
Front View



Recommended Panel Cut-Out

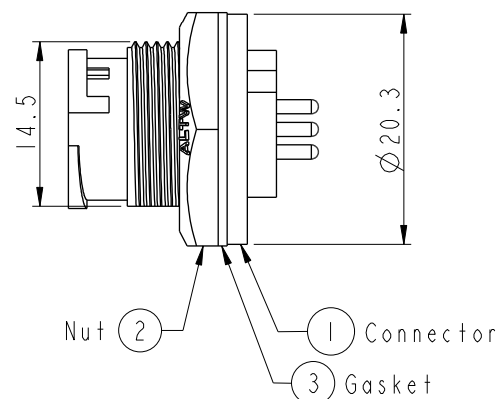

Note:

- * Important Dimensions To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

- Use with Waterproof Cap or Dustcap
Panel Thickness Max: 3.0mm
- Use without Waterproof Cap or Dustcap
Panel Thickness Max: 4.5mm
- * Gasket and Nut are packed separately in PE bags.

UNIT: mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE Standard, Panel Lock 3Pin M Conn M Pin			
SCALE 1:1	SIZE A4	SHEET 1	OF 1
REV. D	WC-REV. A.3	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO. BB-03PMMP-LC7001	DRAWN BY Ruru	DATE 2019-02-20
DWG NO. BB-03PMMP-LC7001	CHECKED BY Rita	DATE 2019-02-20
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-02-20