SHEET 1 OF 1

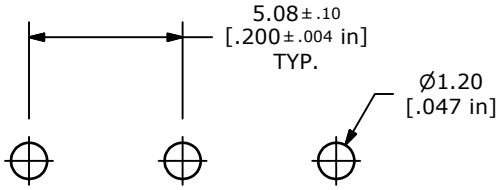

P.C. MOUNTING

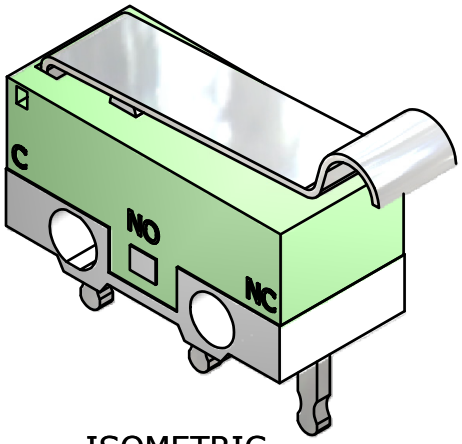

ISOMETRIC

▲ O.P. (MM)	P.T. (MM)
9.5 ±0.8	1.8 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



CIRCUIT: SPDT

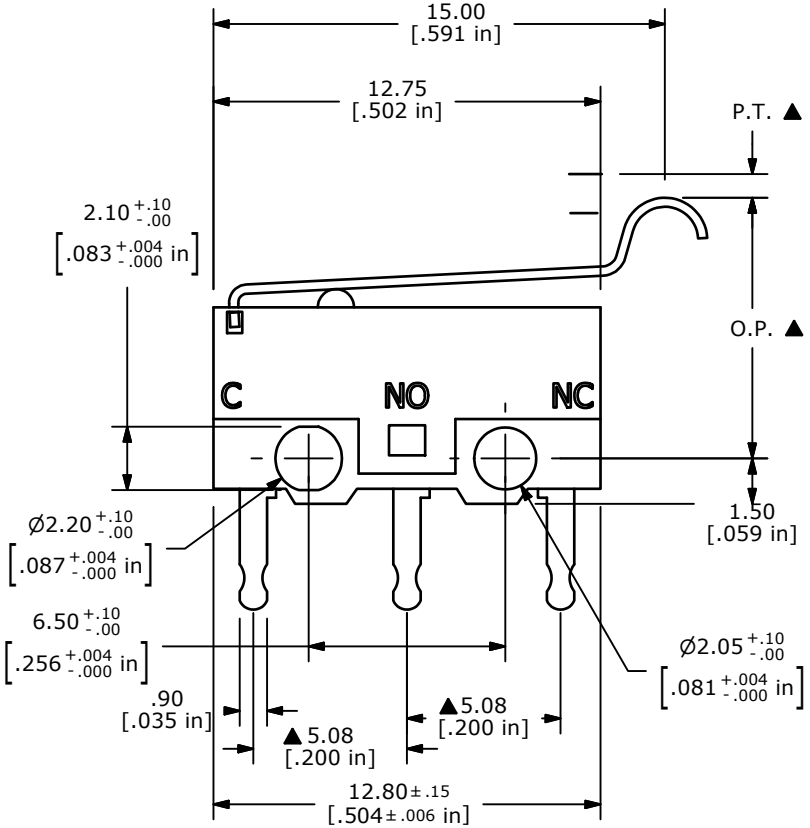

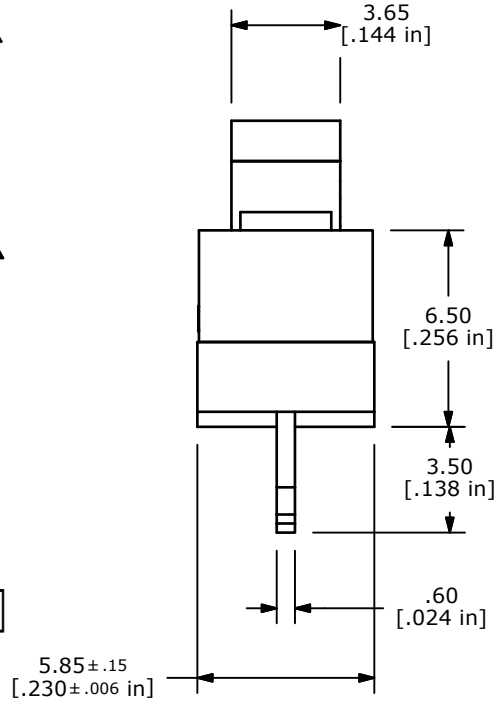

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
▲3. RATING: 1A @125VAC UL, CSA APPROVED
▲4. OPERATING FORCE: 25gf
5. OPERATING TEMP: -25˚C TO 85˚C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. MECHANICAL LIFE: 300,000 CYCLES MIN.
8. INSULATION RESISTANCE: 100 MEGA-OHMS
9. DIELECTRIC STRENGTH: 1000VAC-MIN.
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT
12. TERM NOS. FOR REFERENCE ONLY
13. CONTACT MATERIAL: SILVER

REV	PCR NO	DESCRIPTION	DATE	BY
C	20204	UPDATE DRAWING	10/11/11	BMA
B	17499	REVISED AND REDRAWN	7/23/07	BF

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE DM0850102F025P1A

SCALE	DATE	DR	DWG	REV
4:1	7/23/2007	BF	P030033	C