

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		L	REVISED PER ECR-13-008204	10DEC2013	KH	TM

- 1

0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN-LEAD IN TIN-LEAD PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 2




WIRE RANGE: 3-6mm² [12-10 AWG].
- 3

DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4

0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN IN TIN PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 5

THIS CONTACT HAS NO INSULATION BARREL.
- 6

SUPERSEDED BY 1-770003-0.

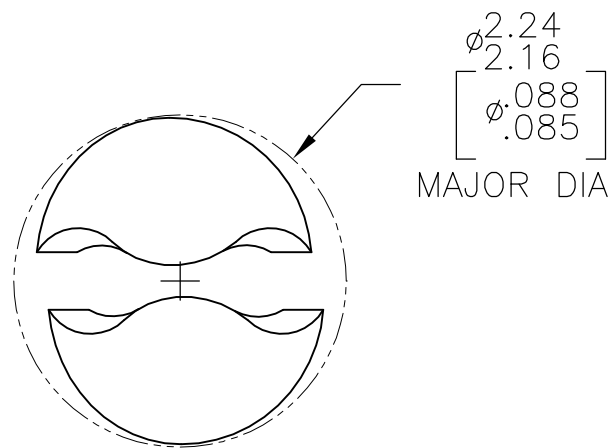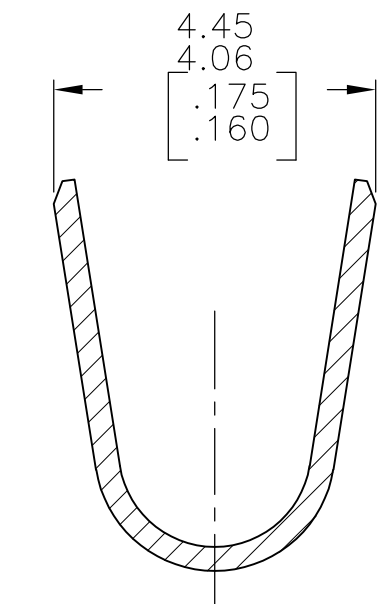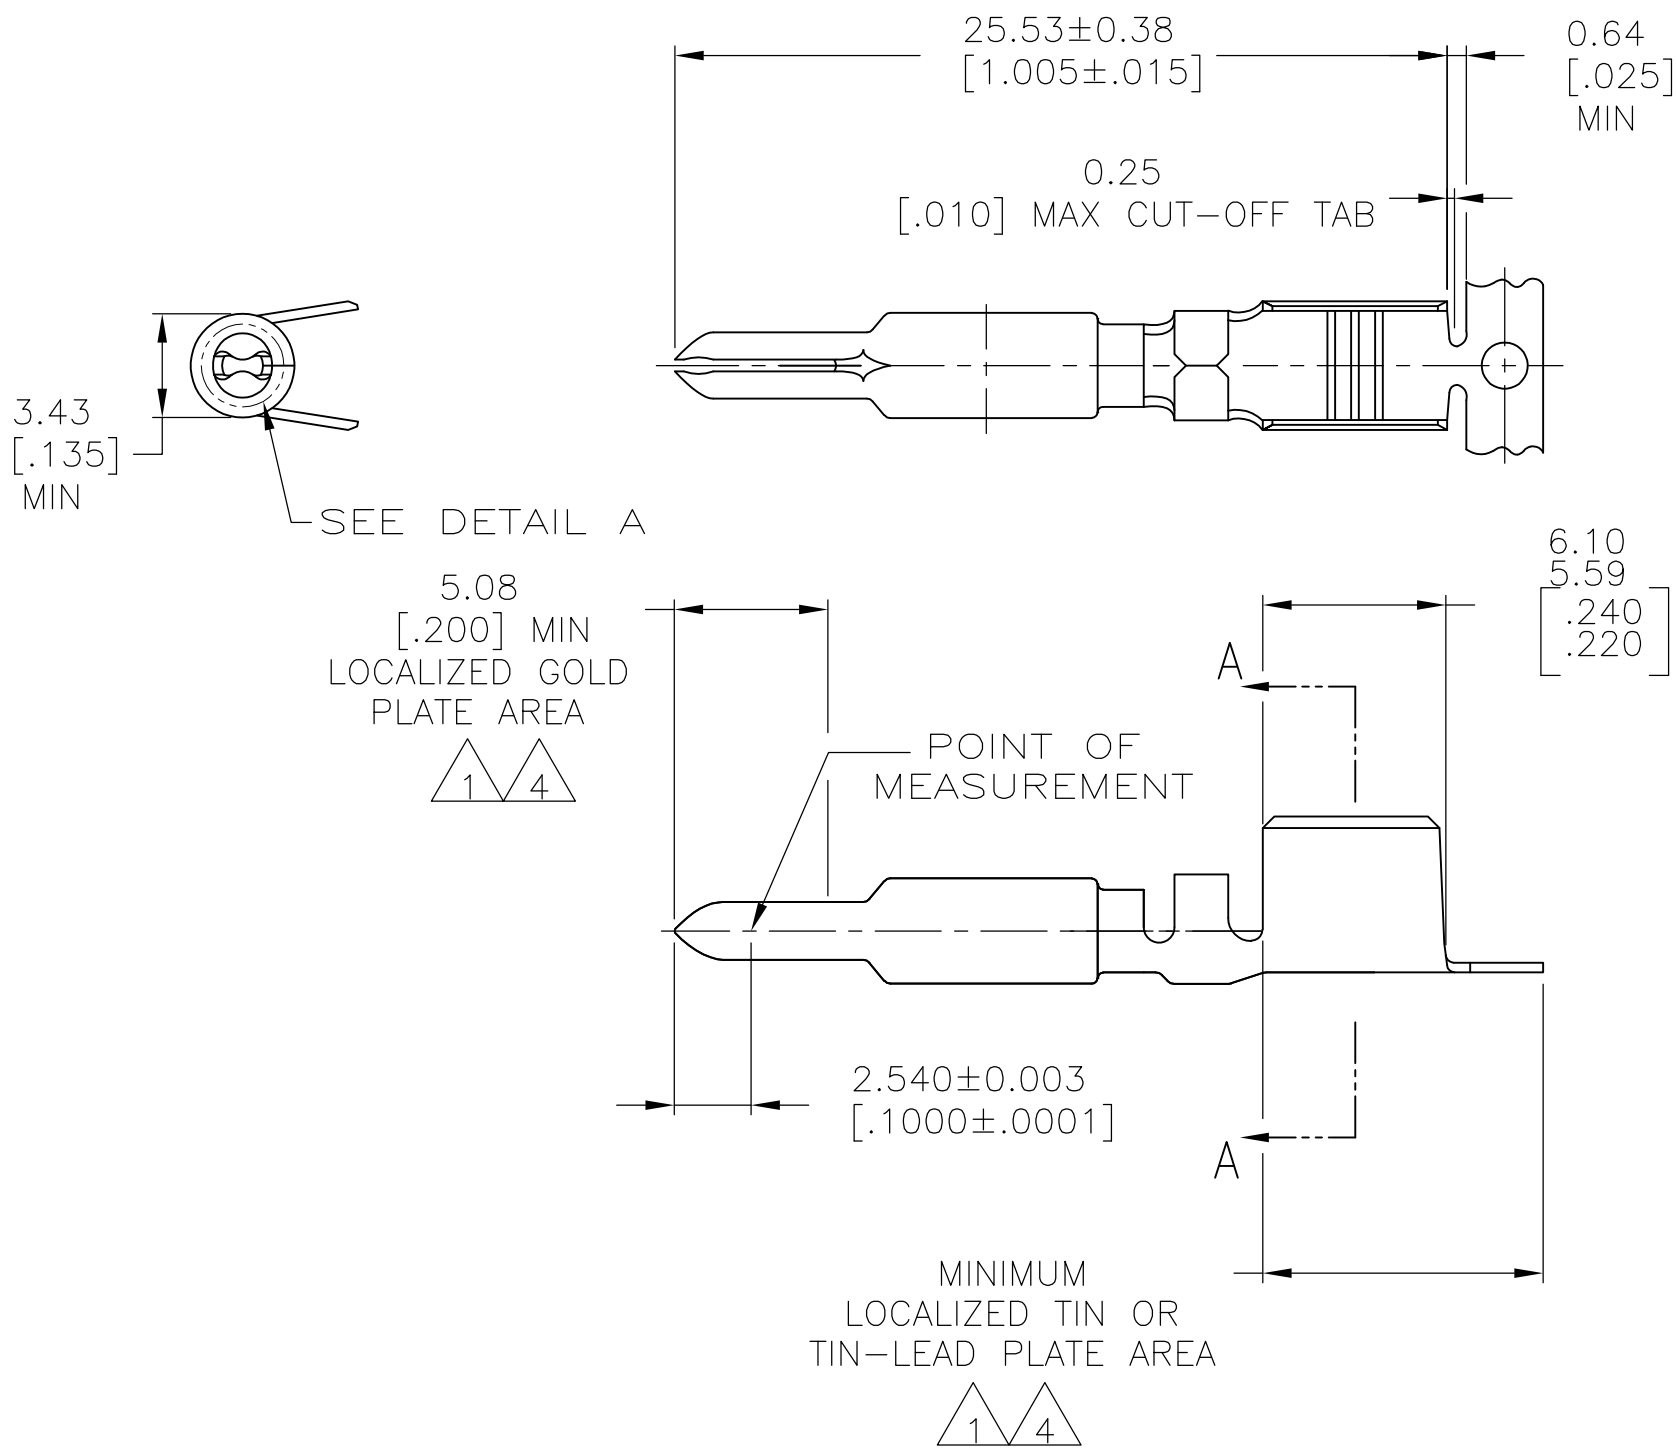

6	GOLD 4	0.30 [.012] PH BRZ	1-770003-0
	GOLD 1	0.30 [.012] PH BRZ	770003-4
	PRE-TIN	0.30 [.012] PH BRZ	770003-3
	FINISH	MATERIAL	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 02APR04 CHK C. JONES 02APR04 APVD C. JONES 02APR04 PRODUCT SPEC APPLICATION SPEC WEIGHT -	TE Connectivity PIN, UNIVERSAL MATE-N-LOK(TM) II
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -	SIZE A2 CAGE CODE 00779 DRAWING NO C-770003 RESTRICTED TO -
MATERIAL -		CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV L	