

## Printed-circuit board connector - GMSTBA 2,5/ 2-G-7,62HTBKP26R44 - 1702236

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB headers, nominal current: 12 A, number of positions: 2, pitch: 7.62 mm, color: black, contact surface: Tin, mounting: Wave soldering



The figure shows the 10-pos. standard item

### Your advantages

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Well-known mounting principle allows worldwide use
- ✓ Larger pitch for increased voltage requirements
- ✓ Closed contour for optimum stability of the plug-in connection

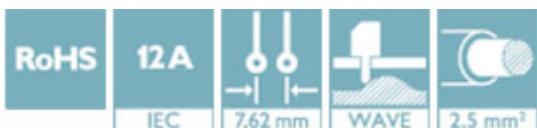

### Key Commercial Data

Packing unit	140 pc
Minimum order quantity	140 pc
GTIN	 4 046356 577168
GTIN	4046356577168

### Technical data

#### Dimensions

Pitch	7.62 mm
Dimension a	7.62 mm
Height	9 mm
Length of the solder pin	2.6 mm

#### General

Range of articles	GMSTB 2,5/..-G-HT
Rated voltage (III/3)	400 V
Connection in acc. with standard	EN-VDE

## Printed-circuit board connector - GMSTBA 2,5/ 2-G-7,62HTBKP26R44 - 1702236

### Technical data

#### General

Nominal current $I_N$	12 A
Color	black
Number of positions	2

#### Standards and Regulations


Connection in acc. with standard	EN-VDE
----------------------------------	--------

#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

### Drawings

Drilling diagram

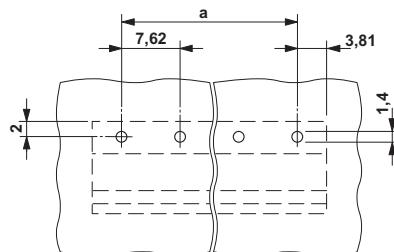

### Approvals

#### Approvals

---

Approvals

---

EAC

---

Ex Approvals

---

#### Approval details

EAC



B.01742

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>