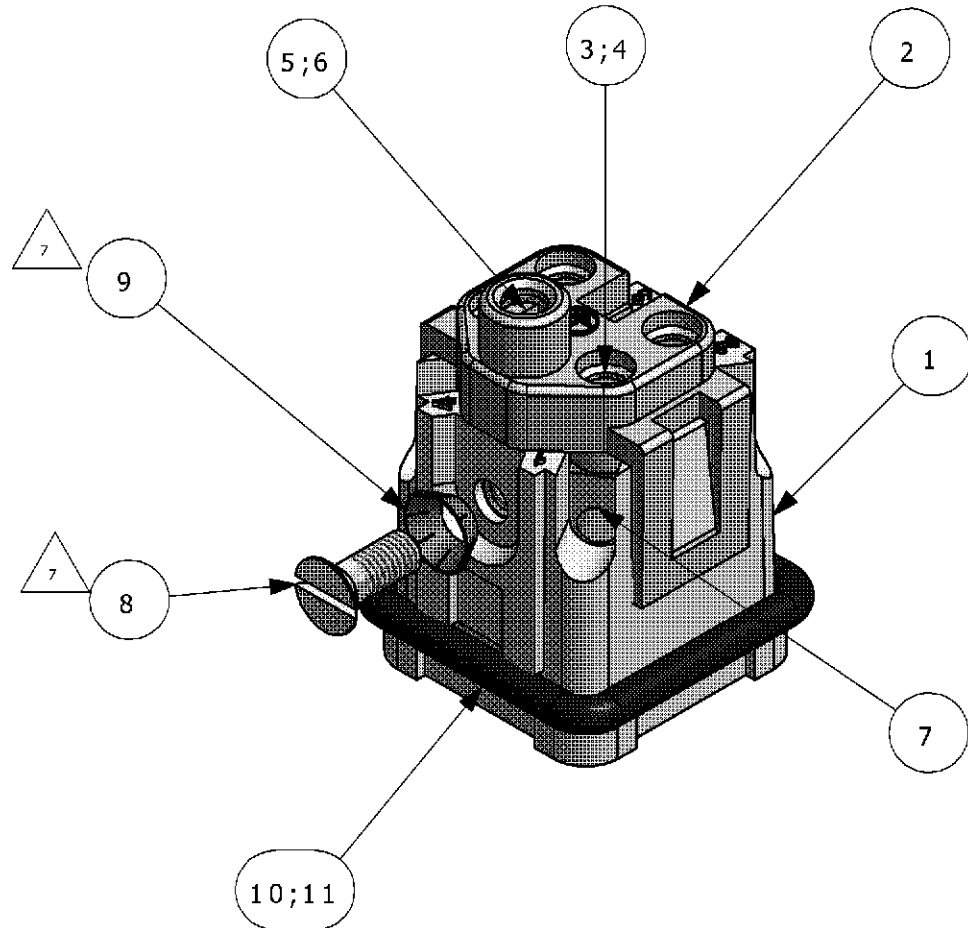




- 1 CONTACT: 1 TO 4
SUITABLE SCREW CONTACTS: SERIES HA.3
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,4 MM
- 2 GROUNDING CONTACT:
SUITABLE SCREW CONTACTS: SERIES HA.4
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,4 MM
- 3 SUITABLE HOOD SIZE 1: SERIES HA; HD; EMV AND H
- 4 SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 2,0x65
- 5 STANDARDS:
DIN EN 61984; DIN EN 60664-1
- 6 POLARIZATION RIPS
- 7 POS. 8 AND POS.9 PACKED SEPARATE IN POLY BAG
- 8 AUTHORIZATION: UL; CSA; VDE; SEV
- 9 PACKAGING:
10 SETS IN A CARTON, PRE-MOUNTED

A diagram of a 4-pin connector. The pins are numbered 1, 2, 3, and 4. Pin 1 is on the left, pin 2 is on the right, pin 3 is on the top right, and pin 4 is on the top left. The connector has a central rectangular slot and a small circular feature in the center.

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED LTD. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. DIESES ZEICHNUNGSDOKUMENT WIRD DURCH AMP INCORPORATED KONTROLLIERT. ÄNDERUNGEN, DIE DEN TECHNISCHEN FORTSCHRITT GEGEN, SIND VORBEHALTEN. DIE WERKSAM LIEFERUNGSZEITEN, ÄNDERUNGEN SIND BEI ANFRAGE.		DWN	29.07.1997	 TE Connectivity	
		H.BRAUN			
		CHK	29.07.1997		
		SCHWEIGER			
DIMENSIONS: DIMENSIONEN: mm		APVD	27.03.2006	NAME	
		T.SCHNURPFEL		MALE INSERT	
		PRODUCT SPEC. PRODUKTSPEZ.		HA.4.STI.S	
		108-74008			
		APPLICATION SPEC. VERARBEITUNGSSPEZ.			
		114-74010		SIZE	
				CAGE CODE	
				DRAWING NO. ZEICHNUNGS-NR.	
MATERIAL	FINISH / OBERFLÄCHE / FARBE	WEIGHT GEWICHT	0,0012 KG	 1103402	RESTRICTED TO NUR FÜR
CUSTOMER DRAWING / KUNDENZEICHUNG			SCALE MASSTAB	1:1	SHEET BLATT
			1	OF VON	1
			REV. C2		