
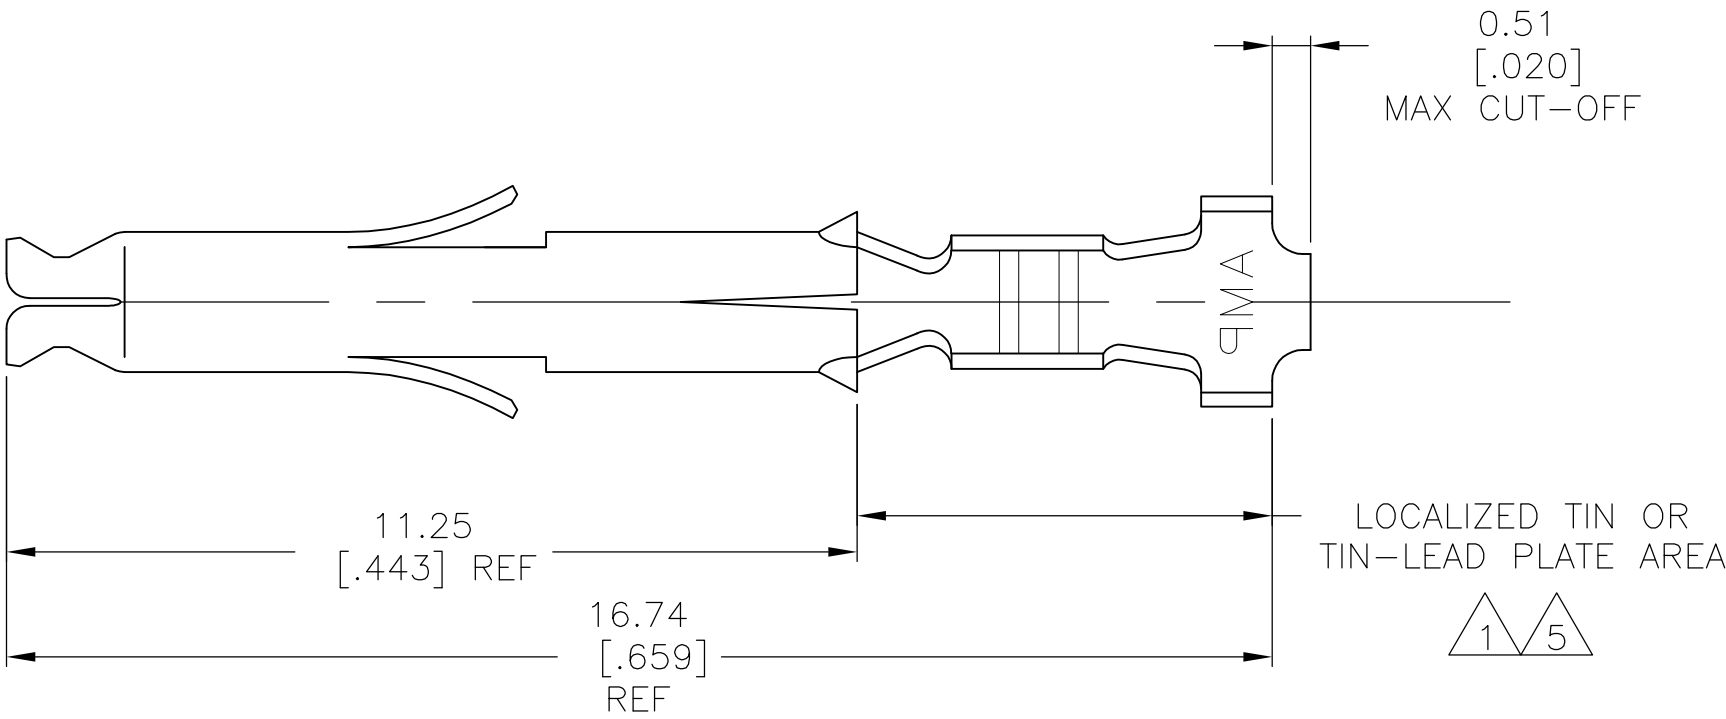


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CM	00					APVD
		P1		REVISED PER ECO-11-004587	11MAR11	RK
						HMR



D

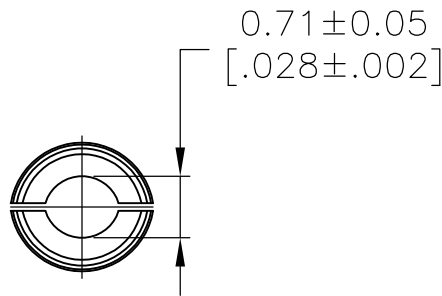

- 1 0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.00130 [.000050] MIN NICKEL.
- 2 WIRE RANGE: 0.12 – 0.4mm² (26–22 AWG).
- 3 INSULATION RANGE: 1.20–1.75[.047–.069] DIA.
- 4 DIMENSIONS IN BRACKETS ARE IN INCHES.


- 5 0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA OVER 0.00130 [.000050] MIN NICKEL.

C

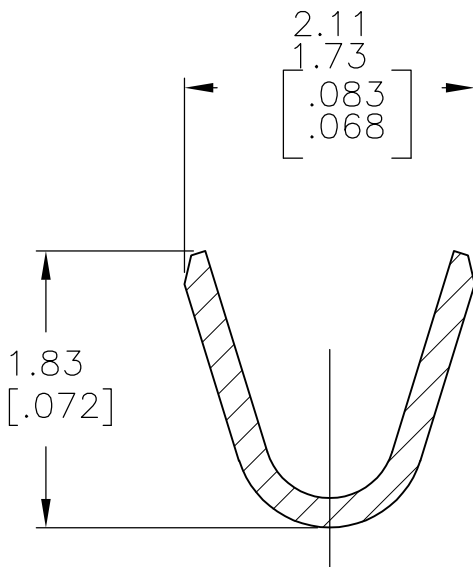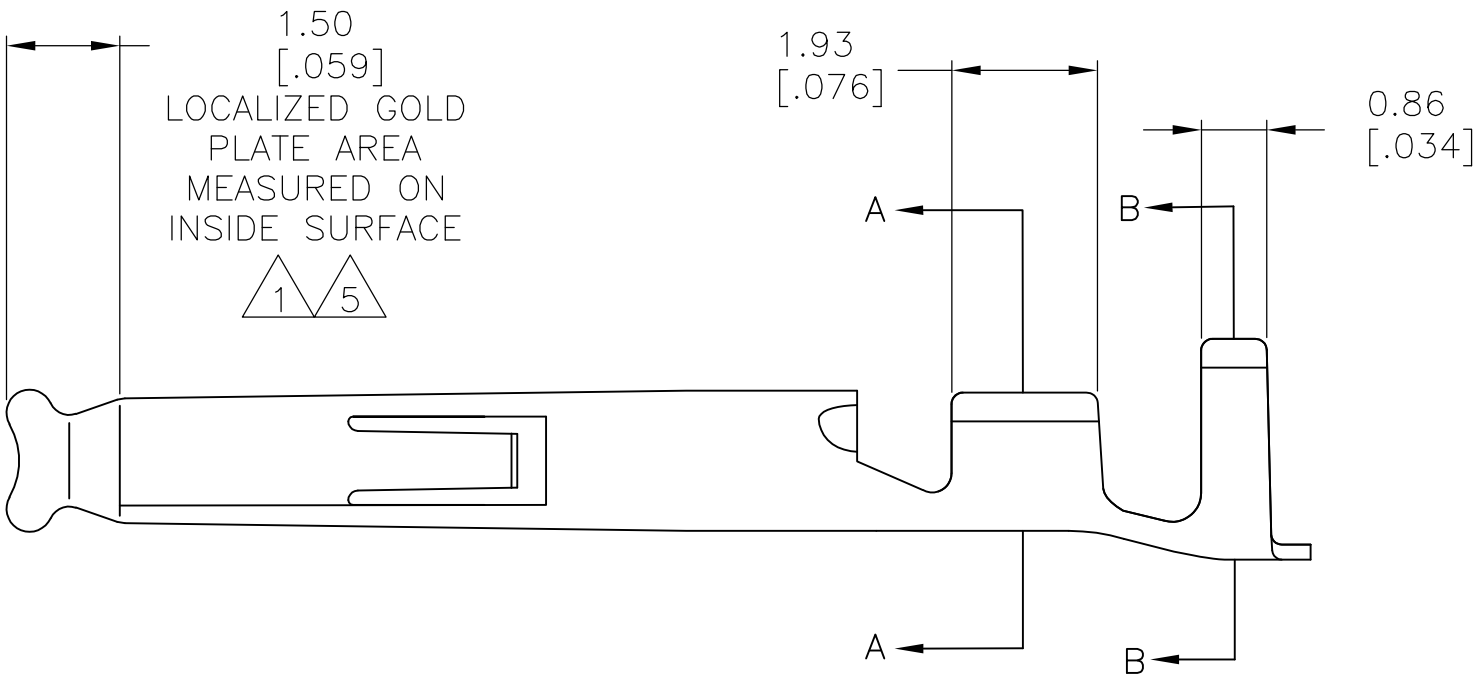

SECTION A–A
SCALE 20:1

B

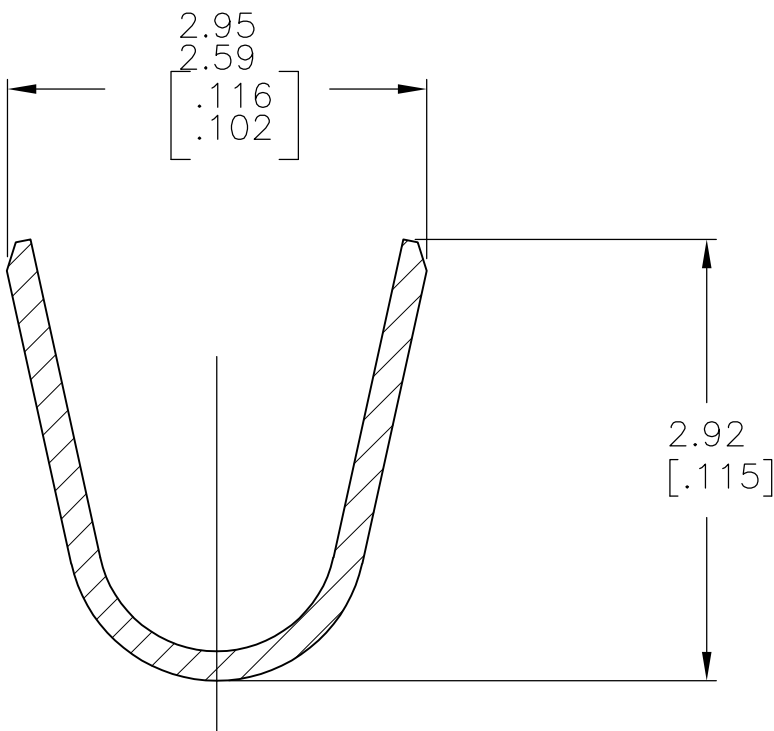

SECTION B–B
SCALE 20:1

5	0.20 [.008] PH BRZ	1–770902–1
5	0.20 [.008] BRASS	1–770902–0
1	0.20 [.008] PH BRZ	770902–6
PRE–TIN	0.20 [.008] PH BRZ	770902–4
1	0.20 [.008] BRASS	770902–3
PRE–TIN	0.20 [.008] BRASS	770902–1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER	16OCT02	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK C. JONES	16OCT02			
		APVD C. JONES	16OCT02	NAME SOCKET, MINI UNIVERSAL MATE–N–LOK(TM)		
		PRODUCT SPEC				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		SIZE A2	CAGE CODE 00779	DRAWING NO C=770902
0 PLC ± – 1 PLC ± – 2 PLC ± – 3 PLC ± 0.15[.006] 4 PLC ± – ANGLES ± 1°		WEIGHT –		RESTRICTED TO –		
MATERIAL –		FINISH –		SCALE 10:1	SHEET 1 OF 1	REV P1
CUSTOMER DRAWING						