


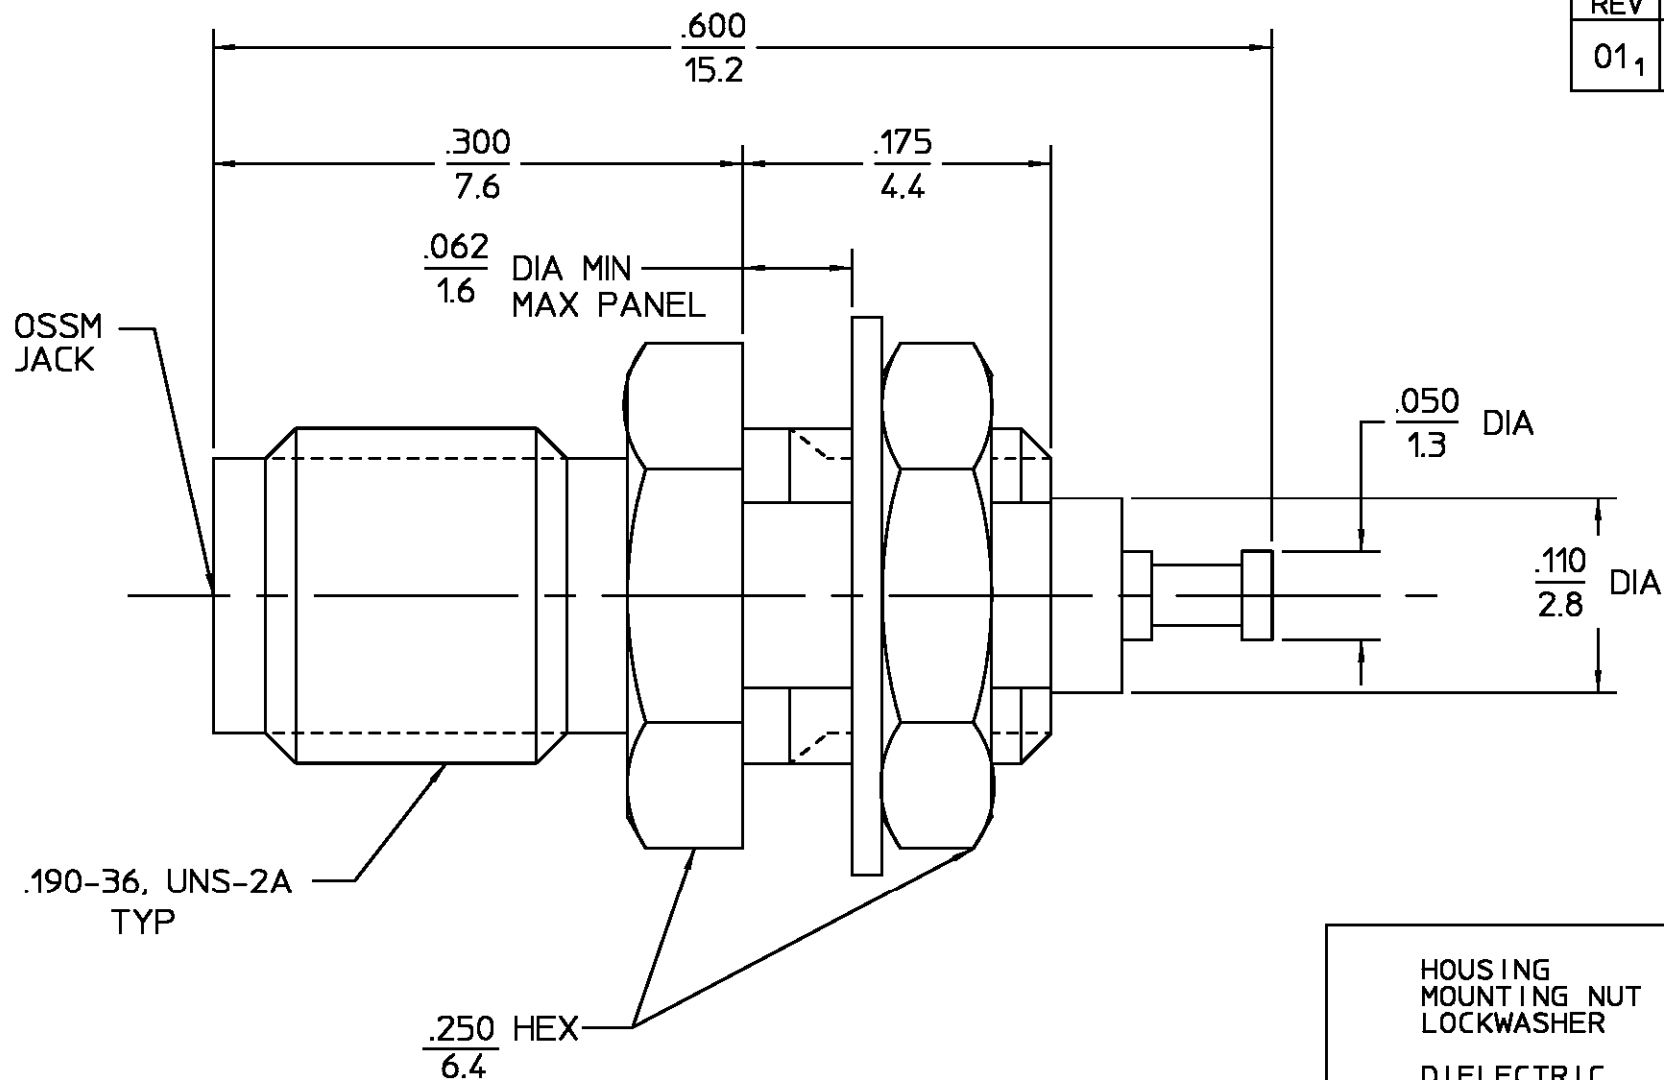


OSSM
JACK

.190-36, UNS-2A
TYP

.250 HEX
6.4

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₁	REDRAWN ON CAD ECN 94-0474 <i>PRB</i>	1/17/95	<i>PRB</i> 1/17/95

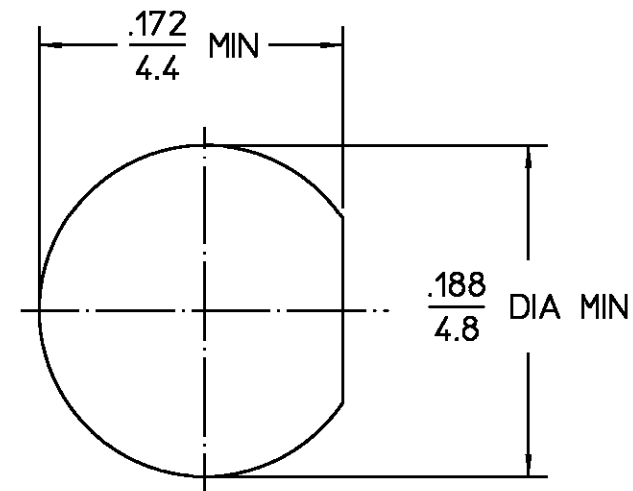

RECOMMENDED
MOUNTING HOLE

NOTES:
1. CAPTURED CENTER CONTACT

.XXX = in
XX.X = mm

HOUSING MOUNTING NUT LOCKWASHER	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		
FRAC. ± 1/64	DEC. ± .005	ANGLES ± 1°
DRAWN BY EJC 7/24/68 CHECKED BY PRB 7/24/68 APPD BY EJD 8/12/68		
USE ASSY PROCEDURE NO. A.P. N/A		
TITLE OSSM BULKHEAD FEEDTHRU JACK RECEPTACLE-SOLDER TERMINAL		
SIZE B	CODE IDENT NO. 26805	1058-0000-00
SCALE 10/1	SHEET 1 OF 1	

COPY IN PUERTO RICO

CUSTOMER DRAWING

AMP PART # 1045636-1
SHEET 1 OF 1 REV A