



REV	DESCRIPTION\PER REQUEST	DRAWN	DATE



VSWR:1.5 Max.
 Per Mil-STD /94
 RoHS Compliant
 50 OHM Impedance
 Operation temperature:-40 to 65 C



RECOMMENDED MOUNTING HOLE

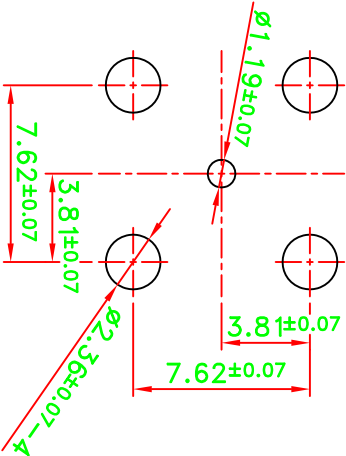

PCB MOUNTING HOLES

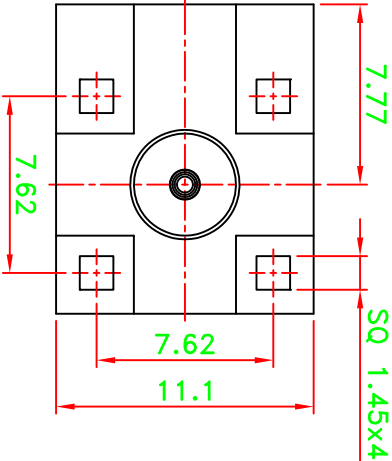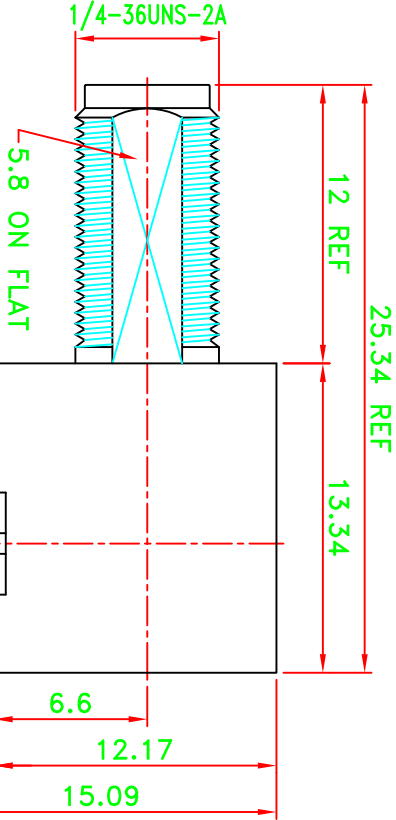

5	INSULATOR	1	PTFE	NATURAL	PART NO. 1261A514FSMA		* MAJOR DIMENSION UNLESS OTHERWISE NOTED TOLERANCES 0.5-6=±0.2 6-30=±0.4 30-120=±0.6 120-315=±1.0 ANGLES=±5°		BOMAR Interconnect Products,Inc TITLE SMA R/A P.C. BOARD MOUNT JACK DRAWING NO. ASSMA-10479-TGN REV B	
4	INSULATOR	1	PTFE	NATURAL						
3	PIN	1	PHOS. BRONZE	GOLD						
2	BODY	1	BRASS	NICKEL	APPROVED		DATE		10/30/14	
1	BODY	1	BRASS	NICKEL	CHECKED		DATE		10/30/14	
NO	DESCRIPTION/DRAWING NO.	Q'TY	MATERIAL	FINISH	DRAWN		DATE		10/30/14	
					Kdi					
					SCALE		3/1		UNIT	
					mm					
					FILE NO. W:\P\AS\ASSMA\ASSMA-10479-TGN		Winchester-->20141030			