



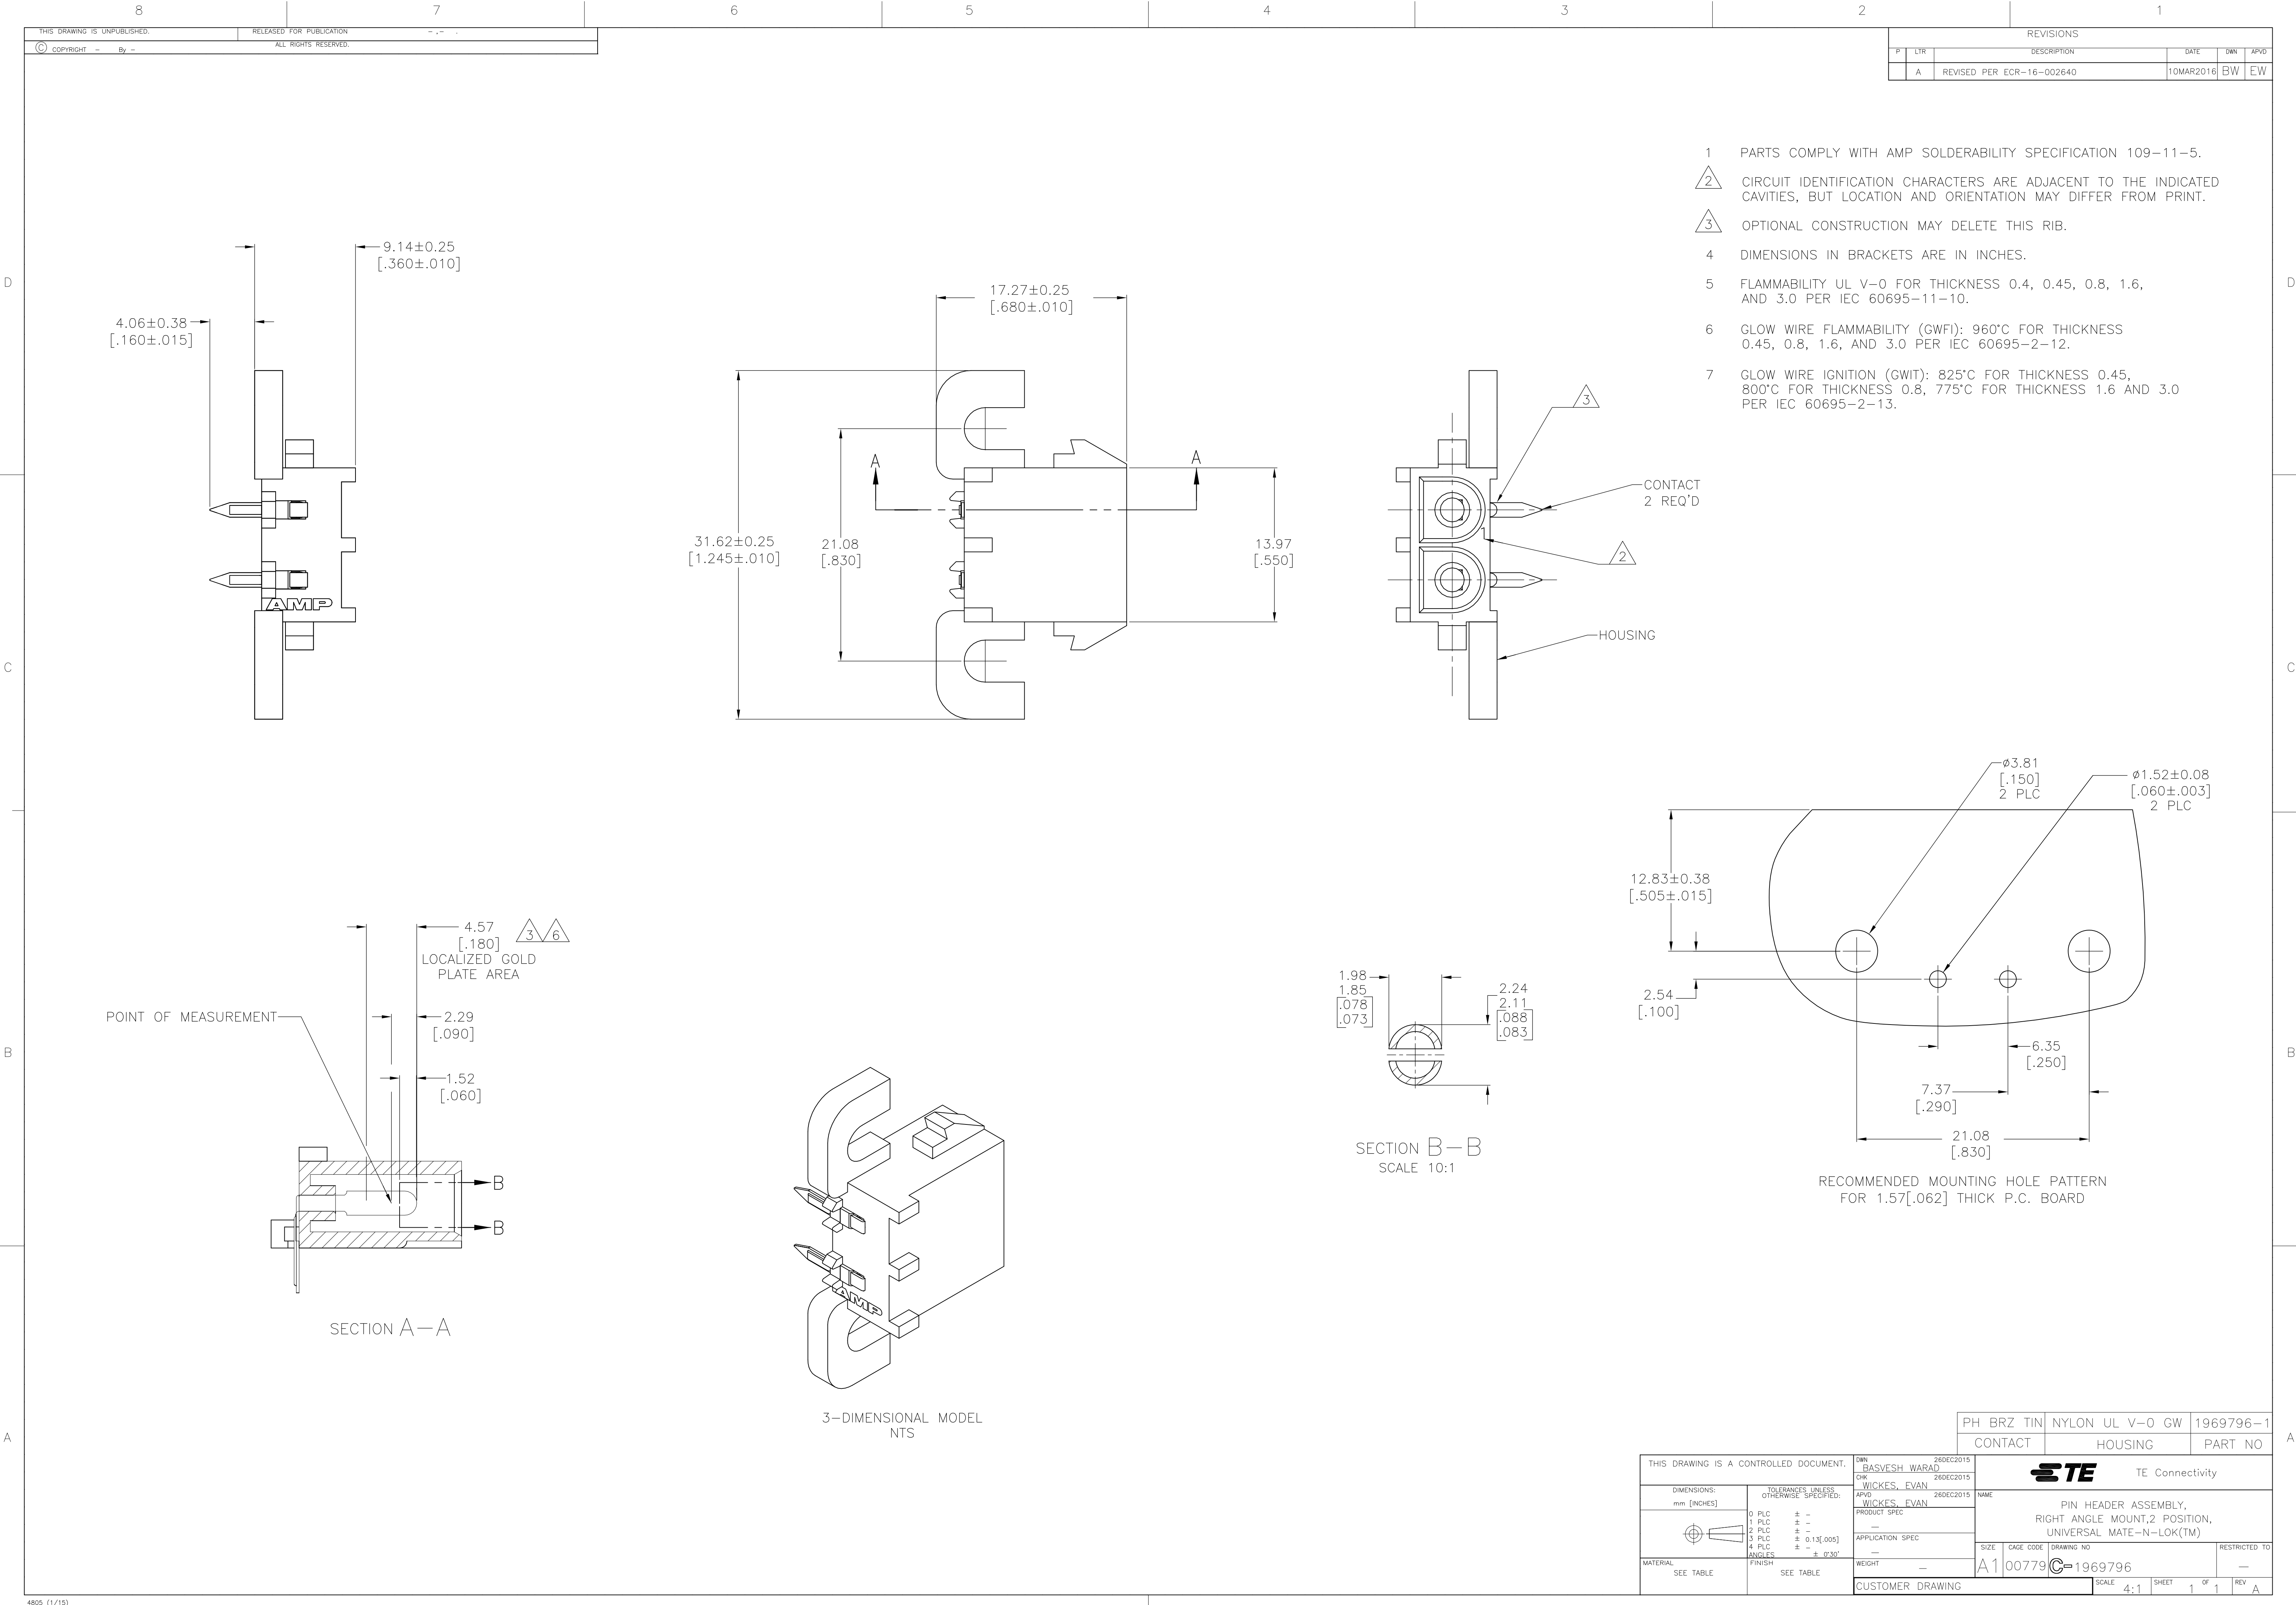

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A		REVISED PER ECR-16-002640	10MAR2016	BW	EW

- PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- OPTIONAL CONSTRUCTION MAY DELETE THIS RIB.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- FLAMMABILITY UL V-0 FOR THICKNESS 0.4, 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-11-10.
- GLOW WIRE FLAMMABILITY (GWF): 960°C FOR THICKNESS 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-2-12.
- GLOW WIRE IGNITION (GWIT): 825°C FOR THICKNESS 0.45, 800°C FOR THICKNESS 0.8, 775°C FOR THICKNESS 1.6 AND 3.0 PER IEC 60695-2-13.

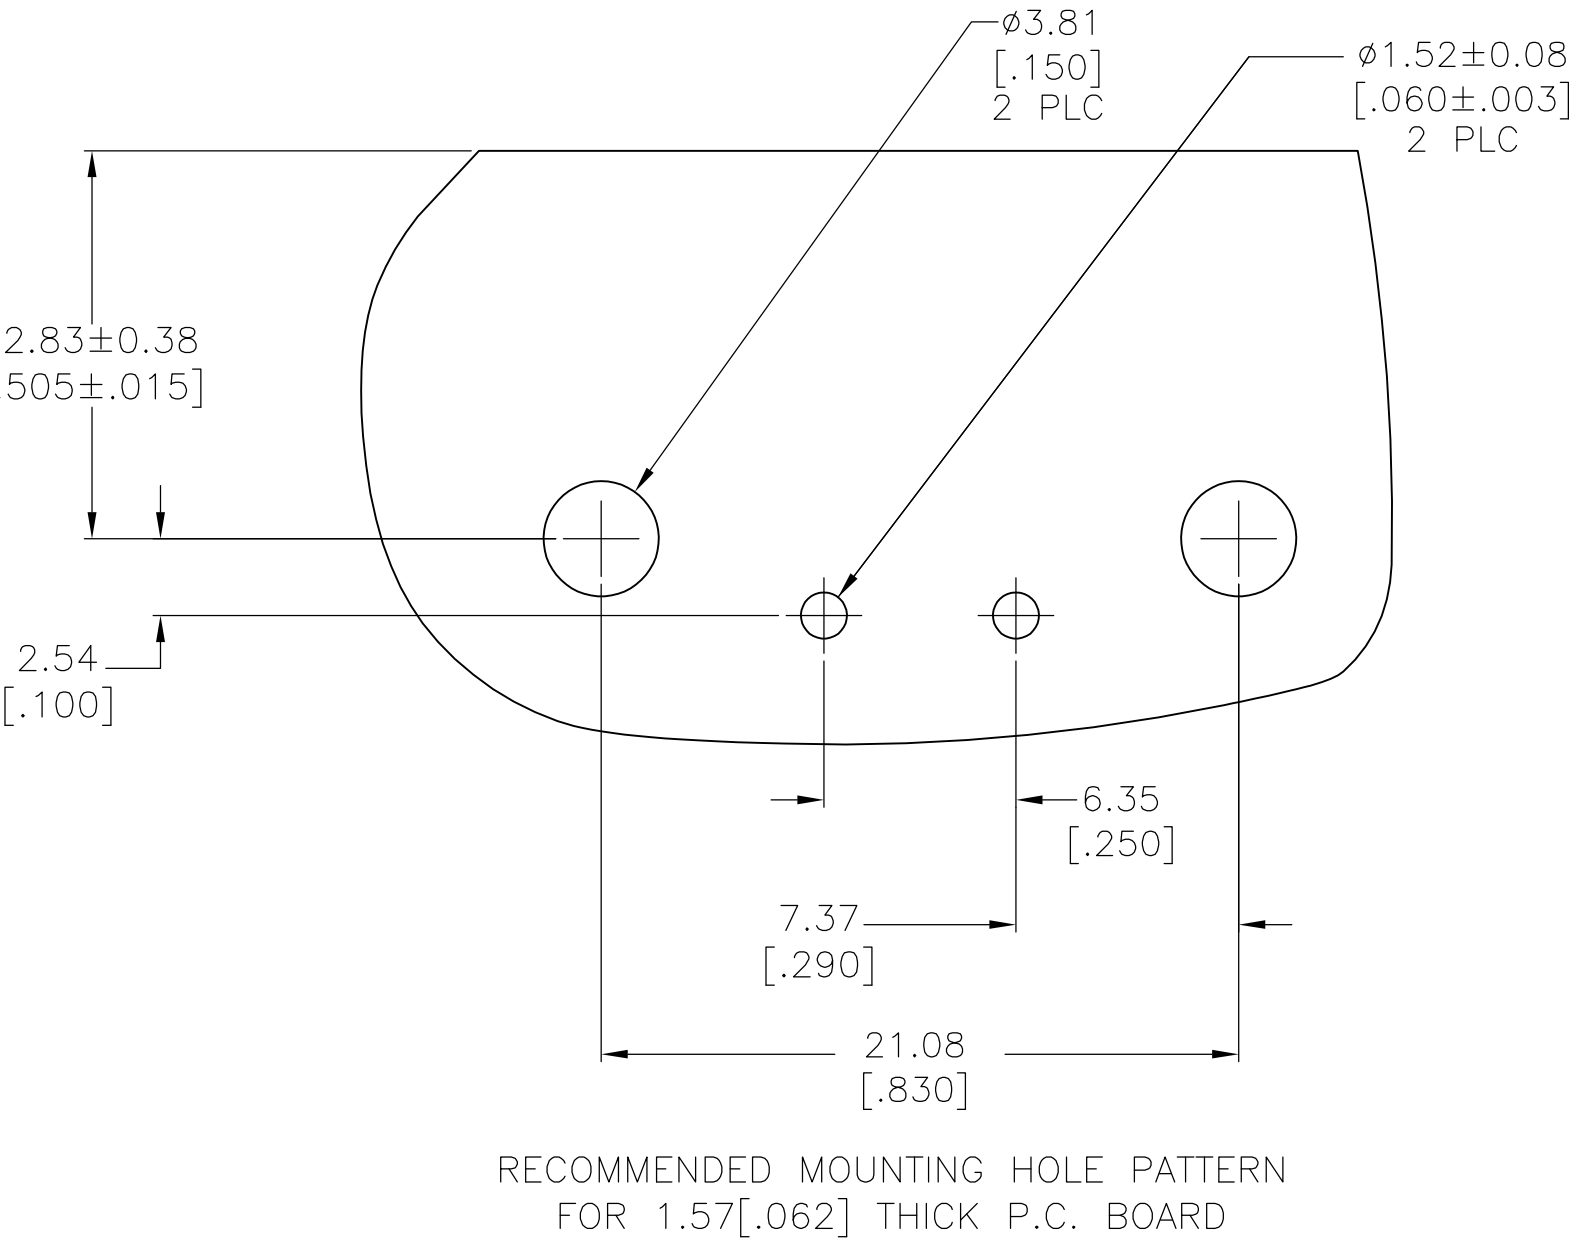

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BASVESH WARAD CHK WICKES, EVAN APVD WICKES, EVAN	26DEC2015 26DEC2015 26DEC2015	PH BRZ TIN CONTACT		NYLON UL V-0 GW HOUSING	1969796-1 PART NO
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		TE Connectivity	
		0 PLC ± -		PRODUCT SPEC		PIN HEADER ASSEMBLY, RIGHT ANGLE MOUNT, 2 POSITION, UNIVERSAL MATE-N-LOK(TM)	
		1 PLC ± -		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
		2 PLC ± -		WEIGHT -		A1 00779 1969796	
		3 PLC ± 0.13 [.005]		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV A	
		4 PLC ± -					
		ANGLES ± 0°30'					
		FINISH SEE TABLE					