# CR2450
# LITHIUM MANGANESE DIOXIDE

## Features & Benefits

- Good pulse capability
- High discharge characteristics
- Stable voltage level during discharge
- Long-term reliability

## Specifications

| | |
|---|---|
| **Nominal Capacity:** | 620 mAh |
| **Nominal Voltage:** | 3V |
| **Weight:** | 6.3g |
| **Operating Temperature:** | -30°C - +60°C |

## Dimensions




## Temperature Characteristics




## Operating Voltage vs. Load Resistance (voltage at 50% discharge depth)




## Capacity vs. Load Resistance

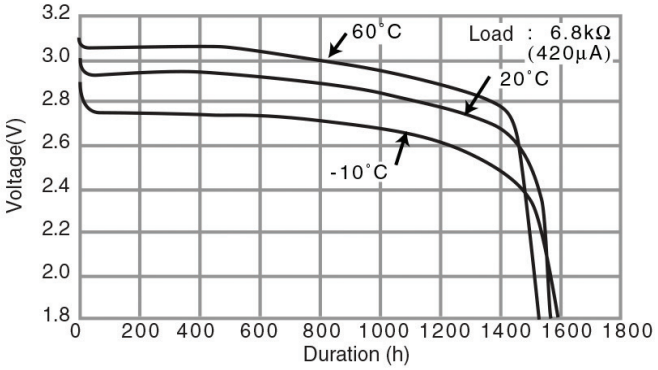


**⚠WARNING**

Serious harm in as little as 2-hours if swallowed. **KEEP AWAY FROM CHILDREN.** Seek immediate medical help if swallowed. Have the doctor call the poison center at 1-(800) 498 8666 for US and Canada.
International: 303-389-1300

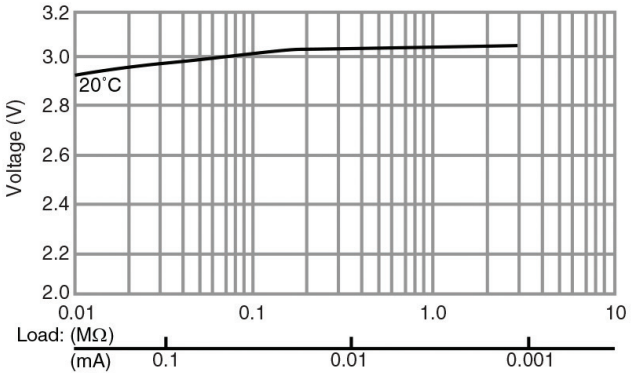Product manufacturers should design their products to meet the safety requirements of Annex I of UL60065 or equivalent standards.

For more information on how Panasonic can assist you with your battery power solution needs call **877-726-2228**, visit **www.na.industrial.panasonic.com/products/batteries** or e-mail **oembatteries@us.panasonic.com**.

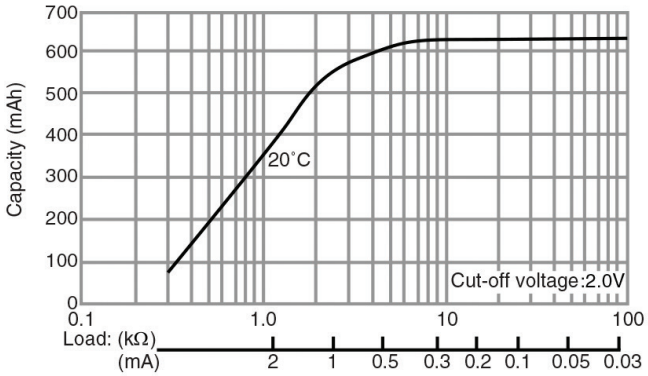*The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.*

LithiumManganeseDioxide/CR2450/Copyright@2018 Panasonic Corporation of America. All Rights Reserved.