
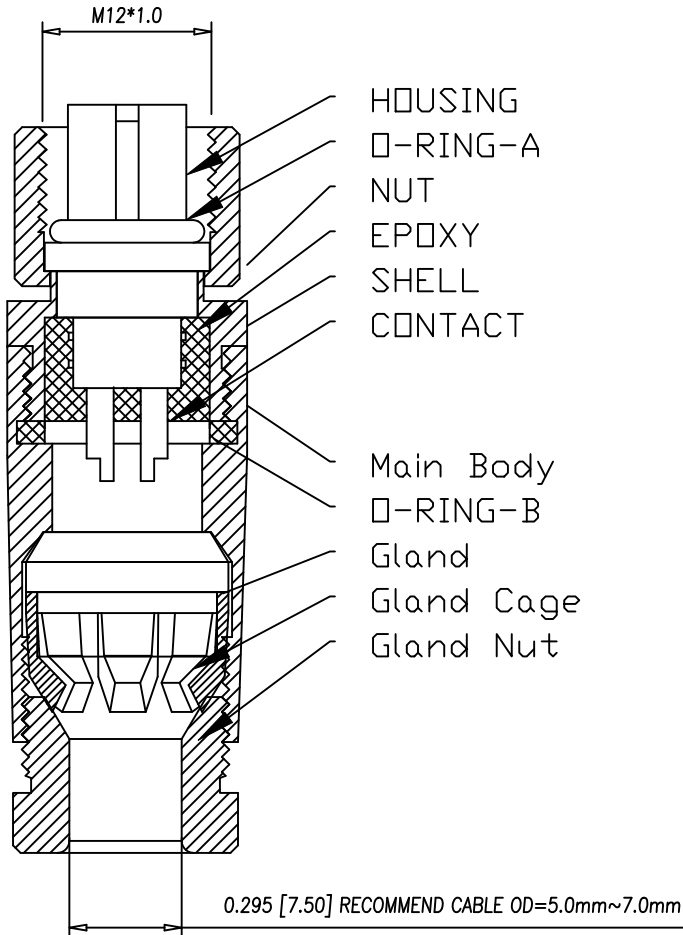
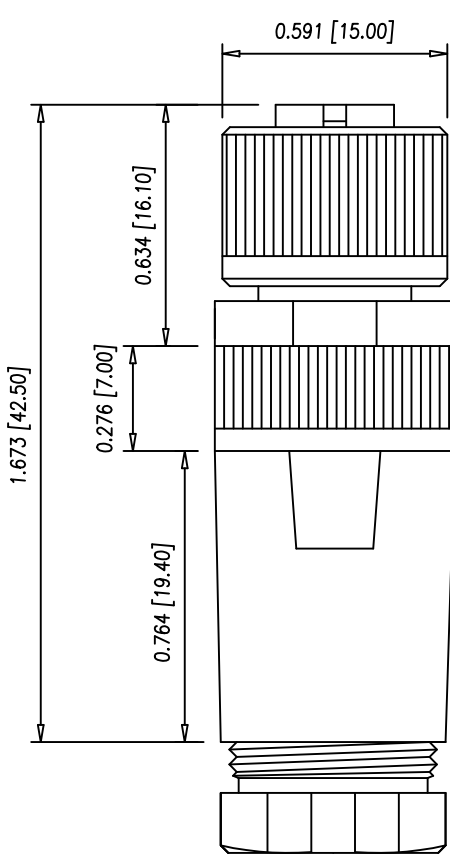


DESCRIPTION: M12 FEMALE - CABLE MOUNT - 4 POS.

UNITS = INCHES [MM]

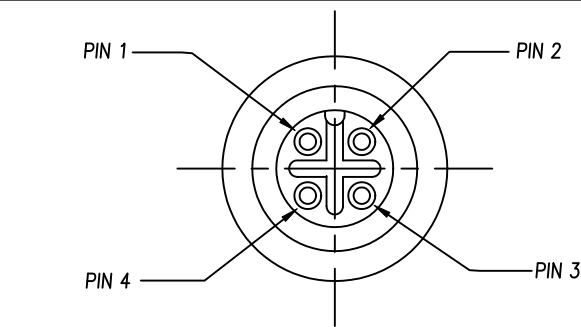

HOUSING  
O-RING-A  
NUT  
EPOXY  
SHELL  
CONTACT

Main Body  
O-RING-B  
Gland  
Gland Cage  
Gland Nut

NOTE:

MATERIAL

HOUSING: PBT UL94V-0, BLACK  
CONTACT: BRASS  
NUT: ALUMINUM ALLOY  
SHELL: ALUMINUM ALLOY  
O-RING: EPDM, BLACK  
MAIN BODY: ALUMINUM ALLOY  
GLAND: SILICONE, BLACK  
GLAND CAGE: POM, WHITE  
GLAND NUT: ALUMINUM ALLOY

FINISH

CONTACT: GOLD FLASH (0.8-1.0) $\mu$ m  
OVER 50 $\mu$ m NICKEL  
NUT: NICKEL PLATED  
SHELL: NICKEL PLATED  
MAIN BODY: NICKEL PLATED  
GLAND NUT: NICKEL PLATED  
ELECTRICAL  
RATED CURRENT: 5A  
RATED VOLTAGE: 125V  
WATER PROOF: IP67  
ENVIRONMENT  
OPERATION TEMPERATURE: -40°C TO +85°C  
WIRE GAUGE: 24-28 AWG

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
M. SIGMON

DATE:  
01-28-15

CHECKED:

DATE:

NorComp

SCALE:  
N.T.S.

SHEET 1 OF 1

REV 0

DWG NO.

858-004-203RKT1