

4

3


2

1



used for:

DIN EN 60603


Plug contact  
131J14019X

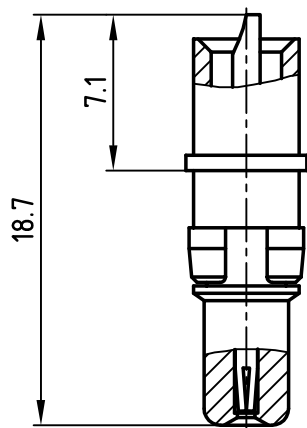

Socket contact  
132J14019X

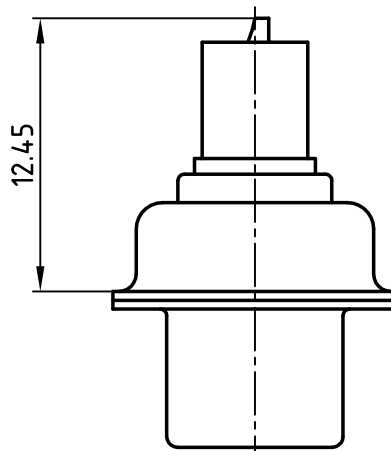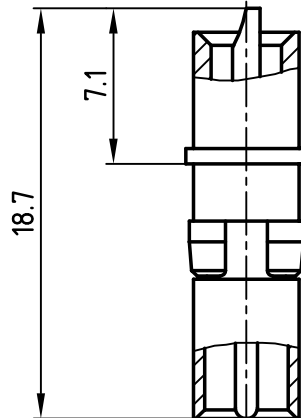

Directive 2002/95/EC  
„RoHS“  
Compliant

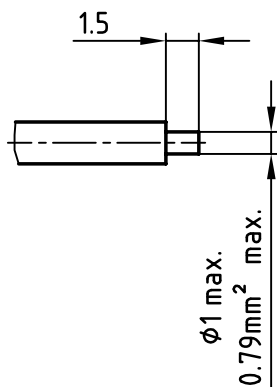

### ⓑ MATERIAL:

1. INSULATOR: PLUG CONTACT: PTFE; BLUE  
SOCKET CONTACT: PTFE; WHITE
2. CONTACT: COPPER ALLOY; GOLD PLATED
3. RETAINING RING: COPPER ALLOY; NICKEL PLATED

THIS DRAWING MAY NOT BE COPIED OR  
REPRODUCED IN ANY WAY, AND MAY NOT  
BE PASSED ON TO A THIRD PARTY WITHOUT  
WRITTEN PERMISSION.

OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

| 1 x b | Ä3527       | 14.12.2009 | Henneb. |
|-------|-------------|------------|---------|
| a     | Origin      |            |         |
| rev.  | description | date       | name    |

tolerance



scale:

3:1

material:

title:

**HIGH VOLTAGE CONTACT**  
for solder straight  
Socket contact + plug contact

dwg no:

AutoCAD 2000

DIN-A

**13K1A568**

4

sh: 1/1

part no:

**SEE DRAWING**

**CONEC®**

4

3

2

1