

SuperNine® Backshells and accessories

310-045 Composite shrink boot adapter

MIL-DTL-38999




STANDARD PROFILE WITH SELF-LOCKING ROTATABLE COUPLING NUT

How To Order 310-045								
Sample Part Number	310	F	S	045	XM	15	D	T
Product Series	Composite shrink boot adapter							
Connector Designator	H = MIL-DTL-38999 Series III							
Angle	S = Straight							
Basic Number	045							
Finish	XB = No plating, black XM = Electroless Nickel XD = No Plating, Desert Tan XMT = Nickel-PTFE 1000 Hour Gray XW = Cadmium O/D over Electroless Nickel							
Connector Shell Size	See Dimensions Table							
Drain Holes	D = Drain Holes, omit for none.							
Shrink Boot Option	T = Shrink Boot, omit for none.							



Dimensions		
H Code Shell Size	E Max	Cable Entry Min.
09	.533 (13.5)	.250 (6.4)
11	.605 (15.4)	.355 (9.0)
13	.774 (19.7)	.491 (12.5)
15	.838 (21.3)	.565 (14.4)
17	.963 (24.5)	.690 (17.5)
19	1.042 (26.5)	.769 (19.5)
21	1.217 (30.9)	.894 (22.7)
23	1.355 (34.4)	1.019 (25.9)
25	1.443 (36.7)	1.134 (28.8)

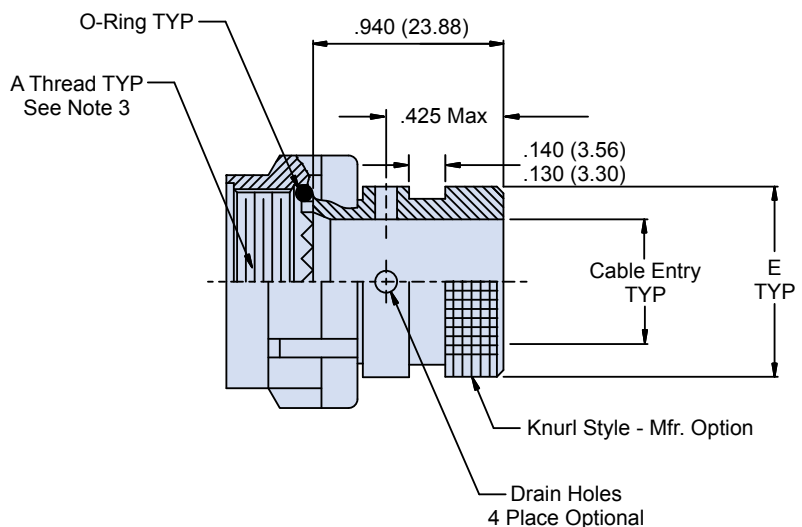

NOTES

- (Straight) 770-0015**-0 shrink boot supplied with "T" option.
- Coupling nut supplied unplated.
- Refer to connector-to-backshell interface standards page in this section.