




P/N	T&B MODEL	FUNCTION
5-1437581-6	ASF22	DPDT
5-1437581-8	ASF22G	DPDT
6-1437581-8	ASF42	4PDT
7-1437581-0	ASF42G	4PDT
7-1437581-8	ASF43	4P3T
7-1437581-9	ASF43G	4P3T
8-1437581-4	ASF62	6PDT
8-1437581-6	ASF62G	6PDT

P/N	T&B MODEL	FUNCTION
6-1437581-5	ASF22RGS	DPDT
6-1437581-6	ASF22RS	DPDT
	ASF42RGS	4PDT
	ASF42RS	4PDT
	ASF43RGS	4P3T
	ASF43RS	4P3T
9-1437581-3	ASF62RGS	6PDT
	ASF62RS	6PDT


4805 (3/11)

D

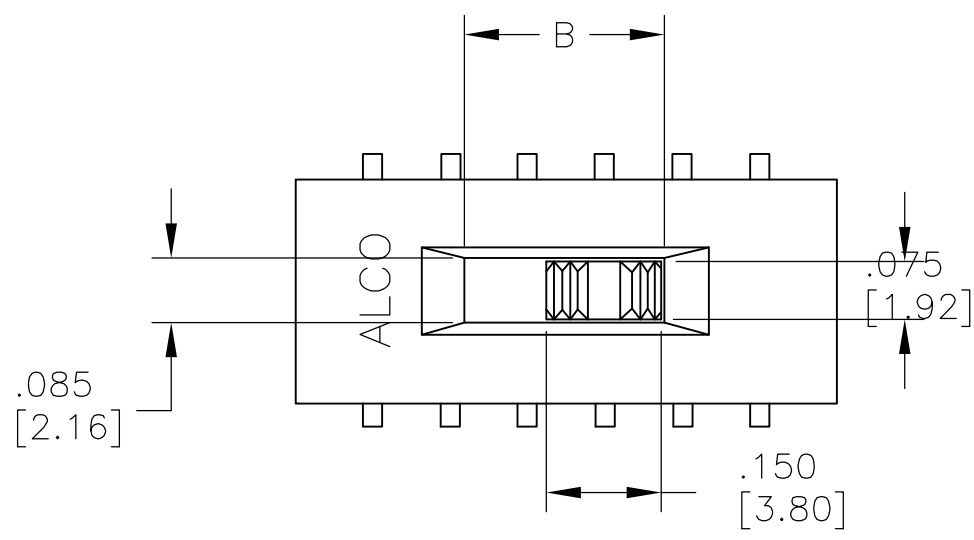


* SIDE ACTUATOR ONLY.

DOTTED LINE INDICATES
SIDE ACTUATOR

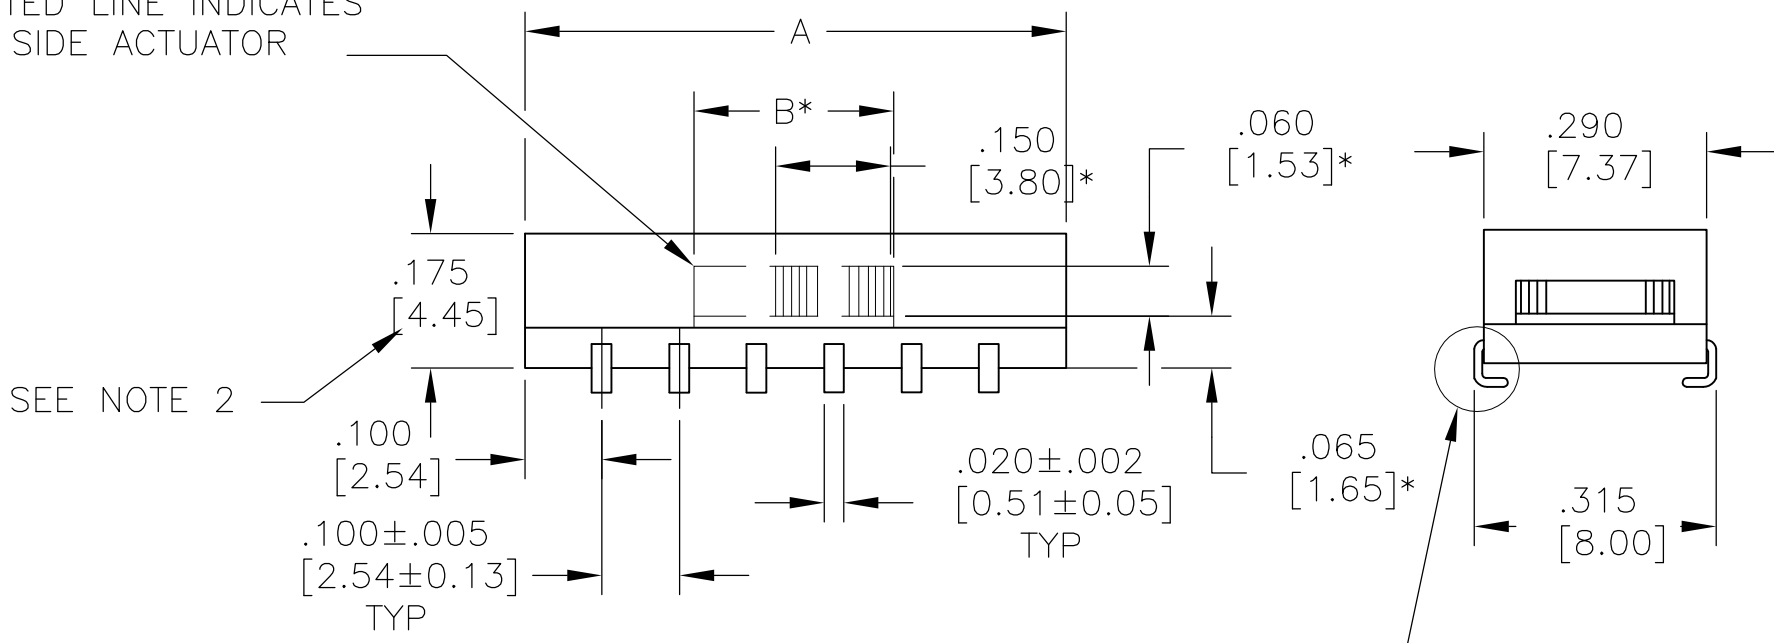


ASE

SEE NOTE A

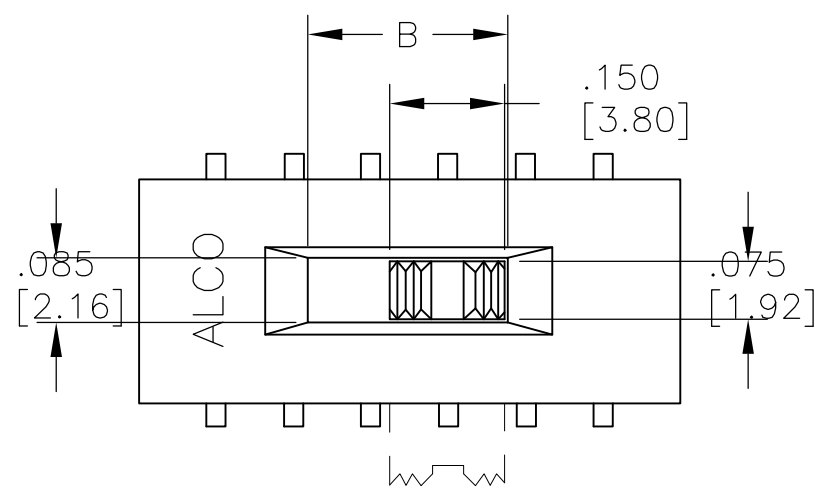


* SIDE ACTUATOR ONLY.

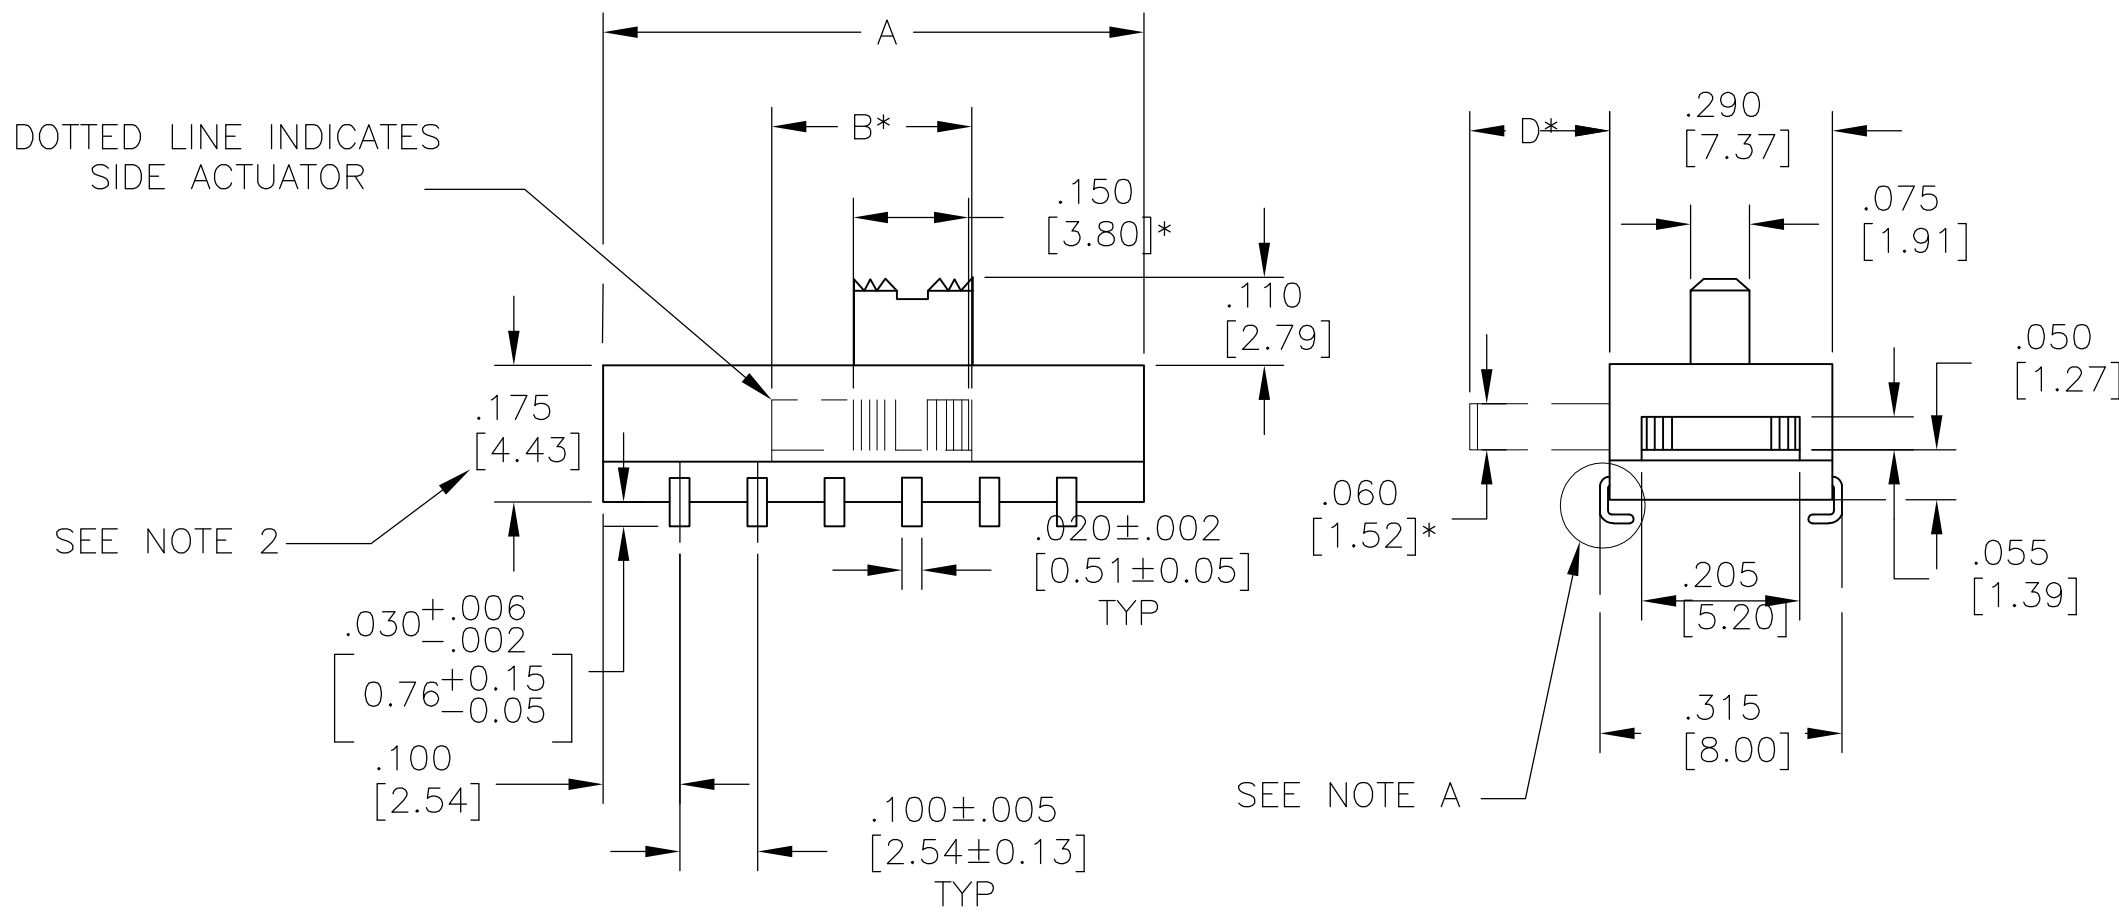

ASE


SEE NOTE A

REVERSE "L" TYPE SURFACE MOUNT

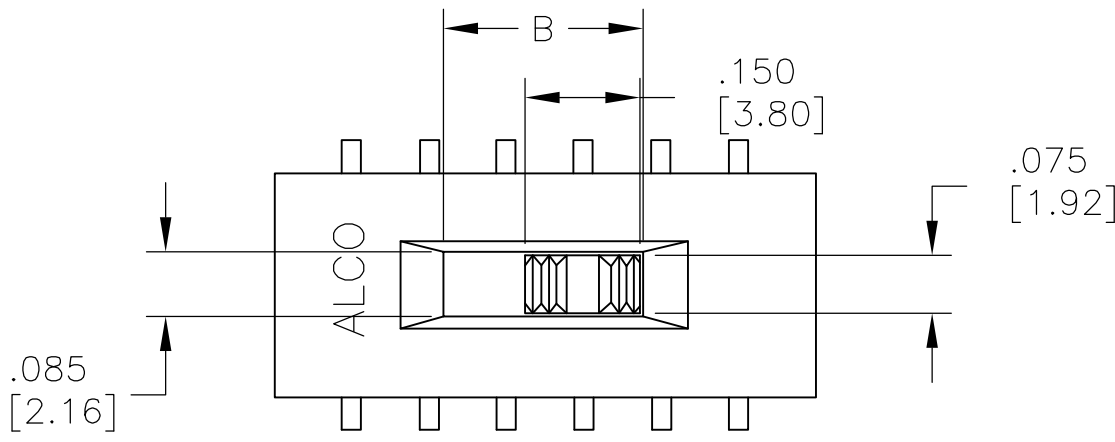


* SIDE ACTUATOR ONLY.

DOTTED LINE INDICATES
SIDE ACTUATOR

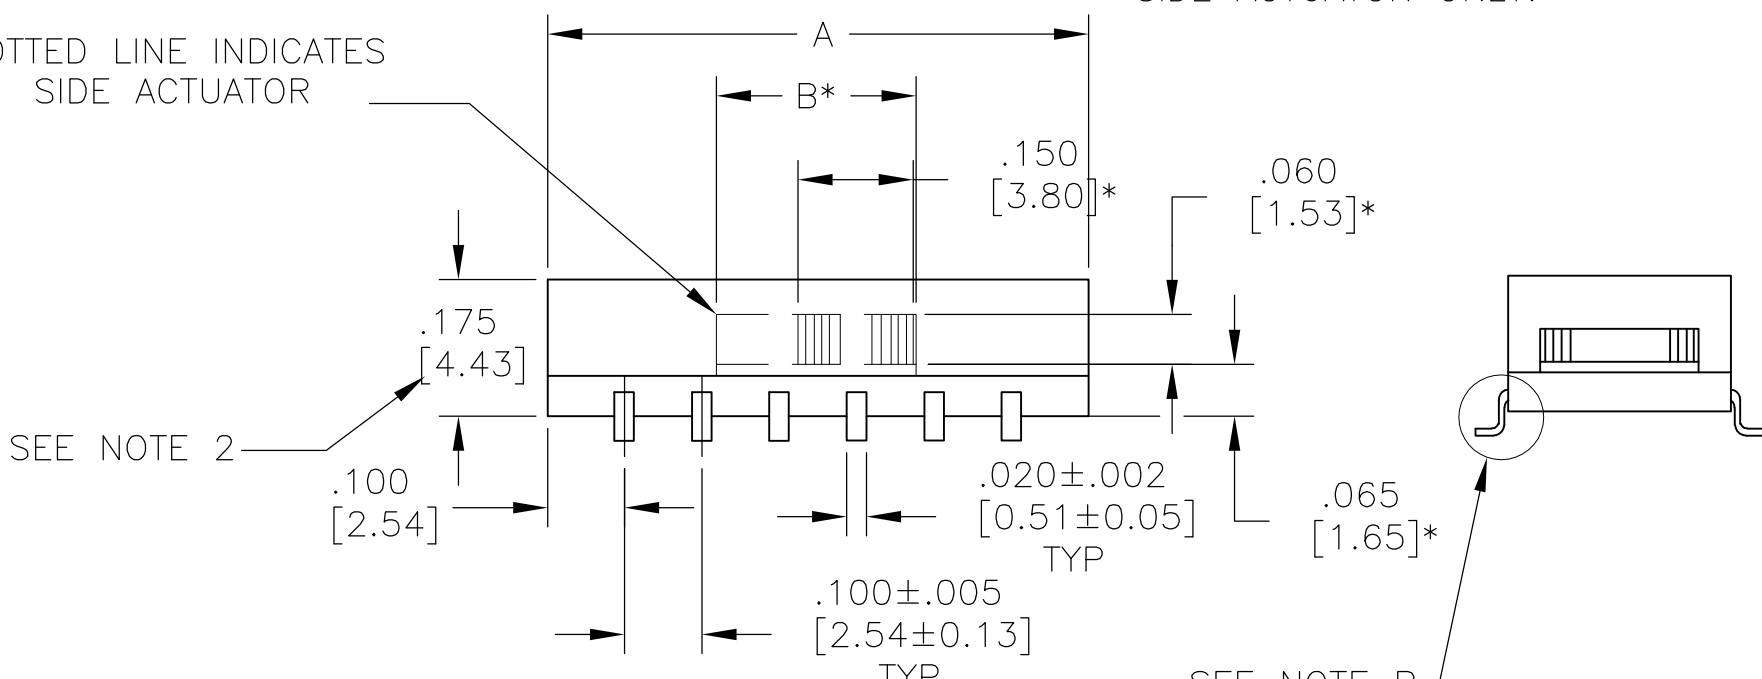


ASF

SEE NOTE B

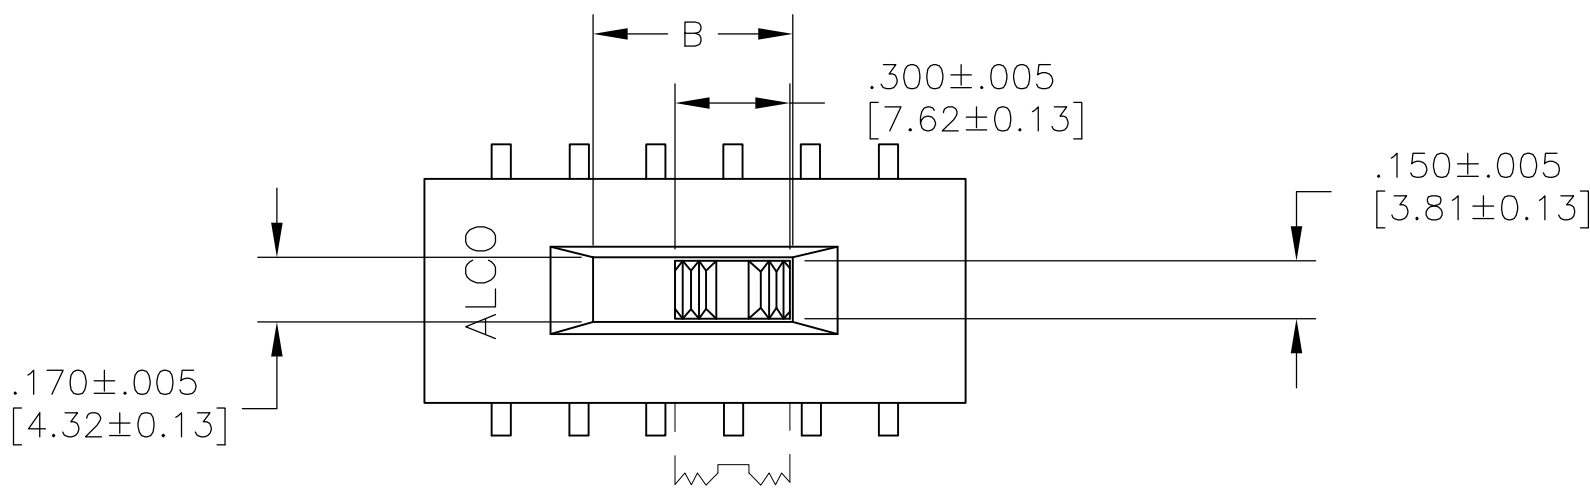



* SIDE ACTUATOR ONLY.

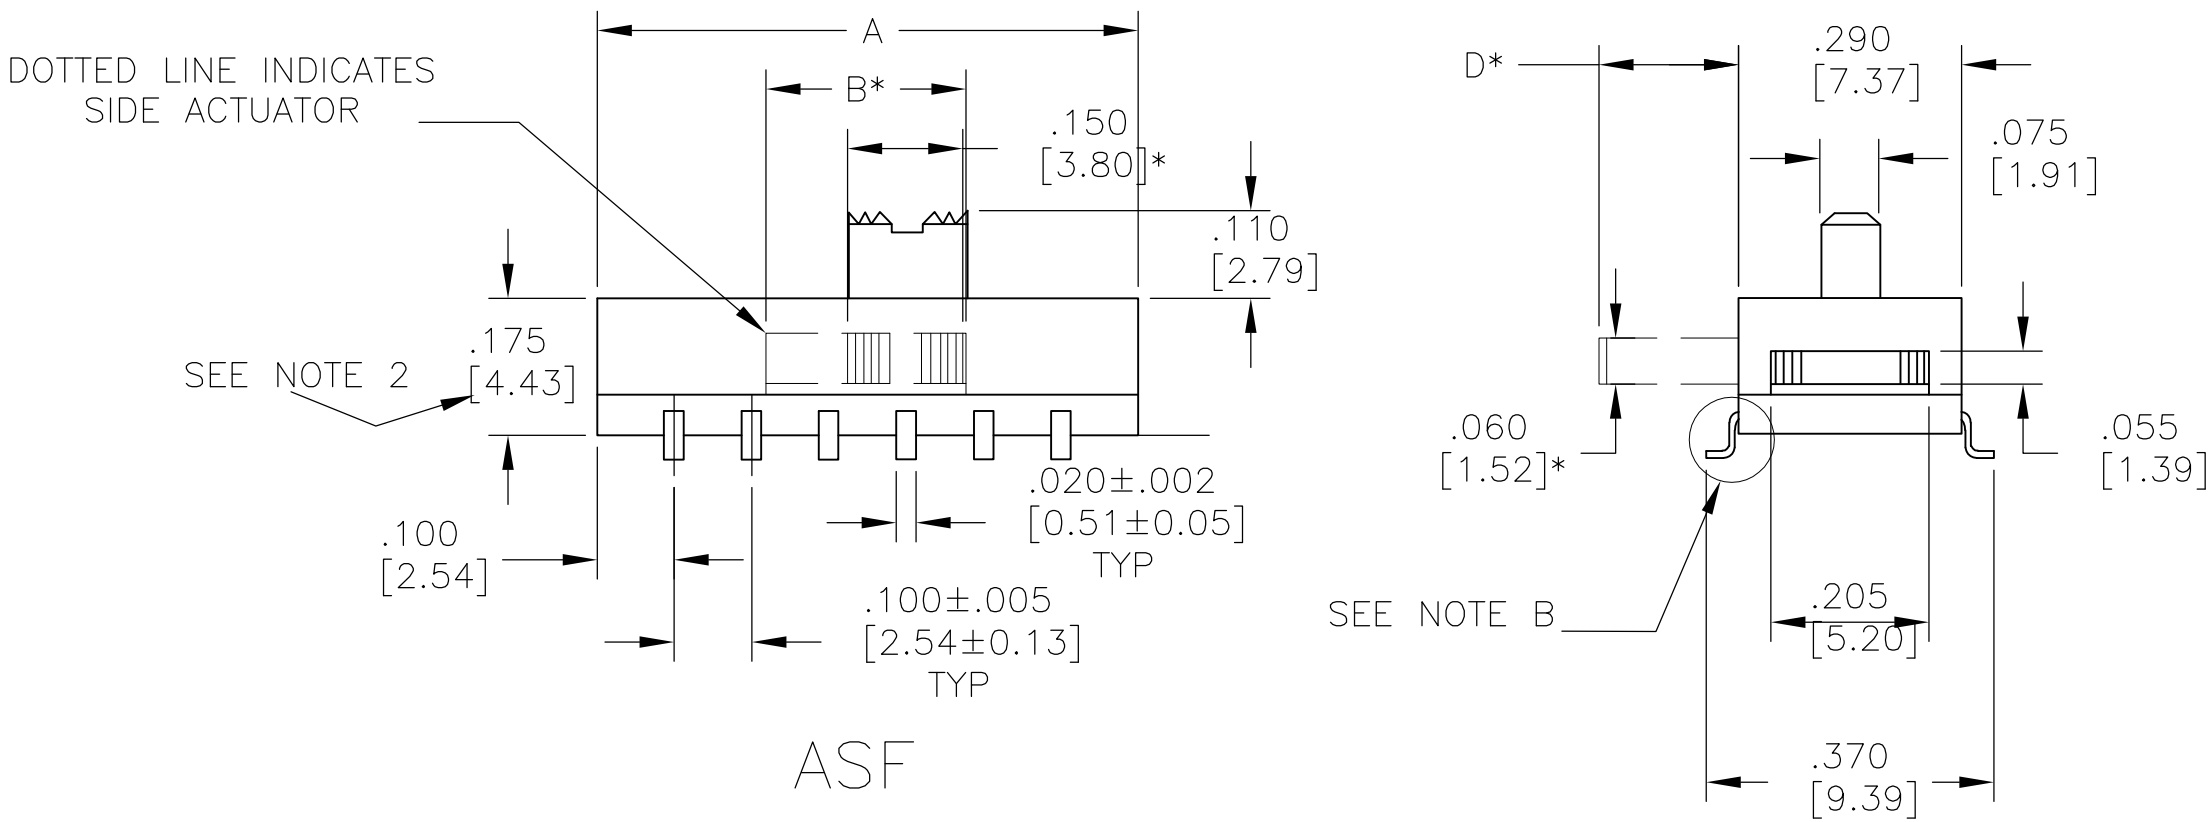

ASF

SEE NOTE B


"L" TYPE SURFACE MOUNT

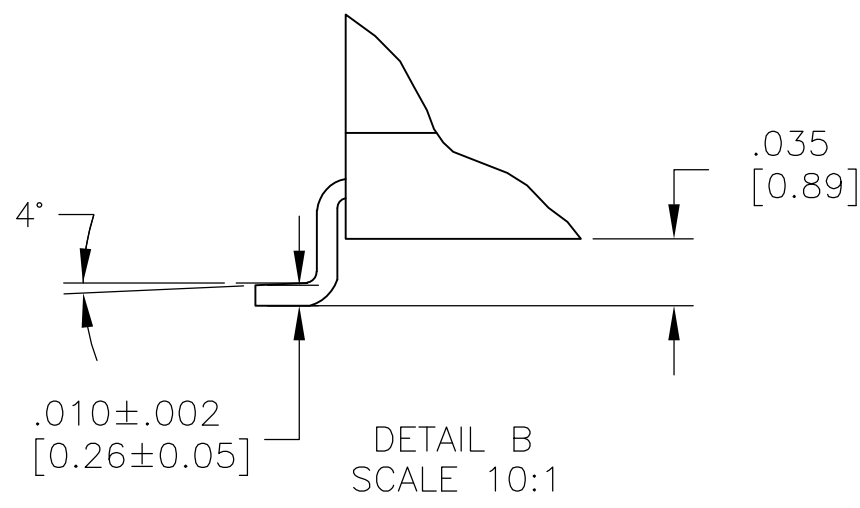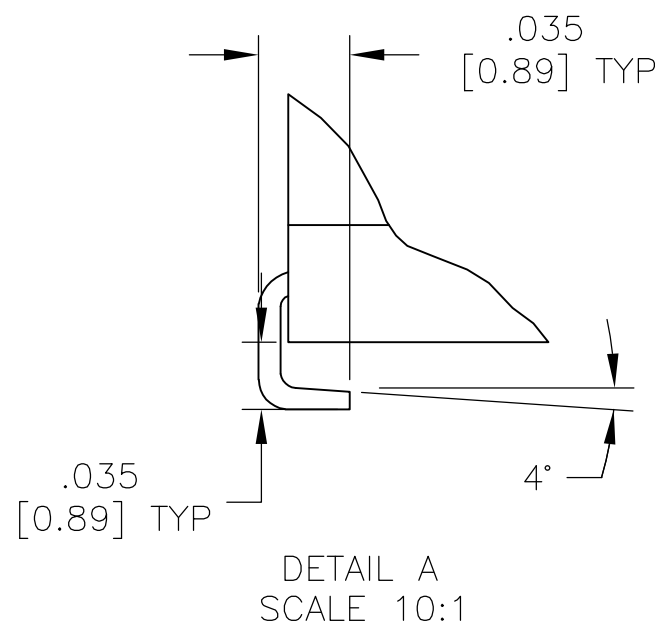

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN M.BINNER	12JAN04	 TE Connectivity							
DIMENSIONS: INCHES [mm]		TOLERANCES, UNLESS SPECIFIED:		CHK —	NAME	SLIDE SWITCH ASE/ASF, AUTO-INSERTABLE, THRU-HOLE AND SURFACE MOUNT						
	0. PLC	± .	—	APVD	—	—						
	1. PLC	± .	—	PRODUCT SPEC		—						
	2. PLC	± .	—	—		—						
	3. PLC	± .	.010[0.25]	APPLICATION SPEC		—						
	4. PLC	± .	—	—		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
	ANGLES	± .	1°	—		A1	00779	 1437581-2	—			
MATERIAL SEE SPECIFICATIONS		FINISH —		WEIGHT —		CUSTOMER DRAWING						
						SCALE		4:1	SHEET	2 OF 2	REV	K2